



## FINISHES

### ● COLORS



## DIMENSIONS

● SIZES mm. | HEIGHT 80 mm.  
 350x350 | 450x450 | 650x650 | 950x950 | 1250x1250  
 300 x 650 | 300 x 950 | 300 x 1250

## LIGHTING OPTIONS

### ■ DIFFUSERS

OPAL | MICROPRISMATIC

### POWERS

STANDARD

### CRI

90

### COLOR TEMPERATURES

2700K | 3000K | 4000K

### ▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

### ▲ LIGHT DISTRIBUTION OPTIONS

DOWN | UP-DOWN


## LUMINAIRE INCLUDES

### .PN

4 x Suspension cables 3m  
 NON-DIM DOWN: 1x Feed Hose 3 x 0,75mm<sup>2</sup>  
 DIM DOWN or NON-DIM DOWN-UP: 1x Feed Hose 5 x 0,75mm<sup>2</sup>  
 DIM DOWN-UP (only): 1x Feed Hose 5 x 0,75mm<sup>2</sup>  
 Connection box CB09.12 with luminaire's finish

### .SR

Surface mounting kit

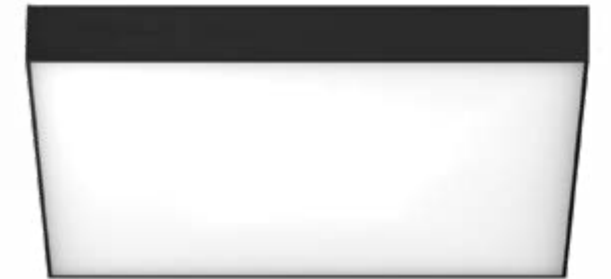

### ON DEMAND

Special RAL Color  
 Special Color Temperature  
 Number of switches  
 Emergency Lighting\*  
 Motion Detection  
 Wireless Control Options (Casambi)

\* Delivered separately  
 (not installed in luminaire).

## INSTALLATIONS



# ALABAMA SLIGHT SQ


REF 10194.PN | 10194.SR

.PN  
PENDANT

10194 ALABAMA SLIGHT SQ | PN  
Pag. 74

.SR  
SURFACE

10194 ALABAMA SLIGHT SQ | SR  
Pag. 74

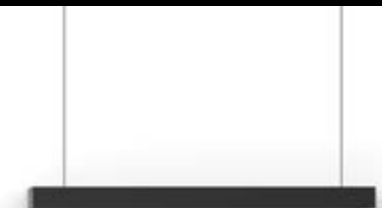

PENDANT | SURFACE  
 .SR  
 .PN

ALABAMA SLIGHT SQ	REF.	DIMENSION	FINISH	DIFFUSER	POWER	CRI	K	DOWNLIGHT			UPLIGHT ▲UP*1		DIMM ▼	SKETCH
								LUMEN	WATT	mA	LUMEN	WATT		
	10194	.35	●	.OP .MP	.ST	.9	.27	2706	27	700	470	7	.DA .PU .D1	
								2940			487			
								3000			619			
	10194	.45	●	.OP .MP	.ST	.9	.27	5412	55	700	658	10	.DA .PU .D1	
								5880			682			
								6000			867			
	10194	.65	●	.OP .MP	.ST	.9	.27	10824	109	700	1034	15	.DA .PU .D1	
								11760			1071			
								12000			1362			
	10194	.95	●	.OP .MP	.ST	.9	.27	21648	218	700	1598	24	.DA .PU .D1	
								23520			1656			
								24000			2105			
	10194	.125	●	.OP .MP	.ST	.9	.27	36080	364	700	2162	32	.DA .PU .D1	
								39200			2240			
								40000			2847			

Reference order | 10194.XX.SR.PN.XX.XX.ST9.XX.XX.XX

ALABAMA SLIGHT SQ	REF.	DIMENSION	FINISH	DIFFUSER	POWER	CRI	K	DOWNLIGHT			UPLIGHT ▲UP*		DIMM ▼	SKETCH
								LUMEN	WATT	mA	LUMEN	WATT		
	10194	.30-65	●	.OP .MP	.ST	.9	.27	3608	36	700	705	11	.DA .PU .D1	
								3920			731			
								4000			929			
	10194	.30-95	●	.OP .MP	.ST	.9	.27	5412	55	700	987	15	.DA .PU .D1	
								5880			1023			
								6000			1300			
	10194	.30-125	●	.OP .MP	.ST	.9	.27	7216	73	700	1269	19	.DA .PU .D1	
								7840			1315			
								8000			1671			

### OPTIONS (.PN)

Reference order | 10194.XX.PN.XX.XX.XX.XX.XX.XX.XX

SUSPENSION KIT	REF.	DIMENSION	FINISH
	SC05	5M.	.SA
	SC07	7M.	
	SC10	10M.	

Reference order | SCXX.SA

CENTRAL ROD SUSPENSION	CONNECTION BOX	REF.	DIMENSIONS	FINISH
		SC21	.60 600mm	●
			.80 800mm	
			.100 1000mm	

Luminaire .95 and .125 require 2 rod suspensions.  
Luminarias .95 y .125 requieren 2 tijas.

Reference order | SC21.XX.XX

\*1 Uplight (UP) is only available for ON-OFF and DALI dimmable (.DA) options, both in 24VdC. La luz indirecta está solo disponible para versiones on-off y regulación DALI (.DA), ambas en 24VdC.

\*1 Uplight (UP) is only available for ON-OFF and DALI dimmable (.DA) options, both in 24VdC. La luz indirecta está solo disponible para versiones on-off y regulación DALI (.DA), ambas en 24VdC.

• Select finishes



# ALABAMA SLIGHT SQ

REF 10194.PN | 10194.SR


### SUSPENSION OPTIONS (.PN)



DEFAULT

CENTRAL ROD SUSPENSION


### PHOTOMETRY

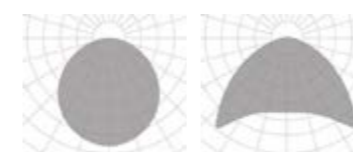

OPAL

MICROPRISMATIC


### INCLUDED (.PN)



CB0912 CONNECTION BOX

SC03.SA WIRE 3M.

### PROFILE



80  
10

PENDANT | SURFACE

SR

PN

PENDANT | SURFACE