

ALABAMA SUPER SLIM



new

A bright idea for any room

The ultimate aim: to focus, not distract. Hence the simplicity of the Alabama family. Square or round, whose minimalism conceals an enormous potential to create unique environments.

Alabama luminaries feature extruded aluminium profiles and opal or microprismatic diffusers to provide even light. The result is enveloping, optimal background lighting with scope to play with the intensity of light.

Ambientes con luz propia

La finalidad última: convertir el espacio iluminado en protagonista. De ahí la simplicidad de los modelos que conforman la familia Alabama. Cuadrados o redondos, con relativa sencillez en sus acabados pero con un enorme potencial de crear atmósferas únicas.

Los modelos Alabama se presentan en perfiles de aluminio extruido y difusores opales o microprismáticos para garantizar una iluminación uniforme y homogénea. Se consigue por ello un ambiente general de iluminación óptima, envolvente, que nos permite jugar con la intensidad de la luz.





FINISHES

● COLORS



DIMENSIONS

● DIAMETERS mm. | HEIGHT 63mm.
250 | 350 | 450 | 650 | 950 | 1250

LIGHTING OPTIONS

■ DIFFUSERS

OPAL | MICROPRISMATIC

POWERS

STANDARD

CRI

90

COLOR TEMPERATURES

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION OPTIONS

DOWN | UP-DOWN

LUMINAIRE INCLUDES

.PN

3 x Suspension cables 3m
NON-DIM DOWN: 1 x Feed Hose 3 x 0,75mm²
NON-DIM DOWN-UP: 1 x Feed Hose 5 x 0,75mm² (Ø350 / Ø450 - 2 x Feed Hose 3 x 0,75mm²)
DIM DOWN: 1 x Feed Hose 5 x 0,75mm² (Ø250 - 1 x Feed Hose 3 x 0,75mm²)
DIM DOWN-UP: 1 x Feed Hose 5 x 0,75mm² (Ø350 / Ø450 - 1 x Feed Hose 3 x 0,75mm²)
Connection box CB03 with luminaire's finish

.SR

Surface mounting kit



ON DEMAND

Special RAL Color
Number of switches
Emergency Lighting*
Motion Detection
Wireless Control Options (Casambi)

* Delivered separately
(not installed in luminaire).

INSTALLATIONS



ALABAMA SUPER SLIM

REF 310001.PN | 310001.SR




.PN
PENDANT

·310001 ALABAMA SUPER SLIM
| PN Pag. 58



.SR
SURFACE

·310001 ALABAMA SUPER SLIM
| SR Pag. 58



PENDANT | SURFACE

.SR

.PN

PENDANT | SURFACE

ALABAMA SUPER SLIM	REF.	DIMENSION	FINISH	DIFFUSER	POWER	CRI	K	DOWNLIGHT			UPLIGHT ▲UP *1		DIMM ▼	SKETCH
								LUMEN	WATT	mA	LUMEN	WATT		
	310001	.25 *2	●	.OP .MP	.ST	.9	.27	1385	13	250	310	.DA .PU .D1		
								1400			321			5
								1425			408			
	310001	.35	●	.OP .MP	.ST	.9	.27	2350	19	250	458	.DA .PU .D1		
								2392			474			7
								2697			603			
	310001	.45	●	.OP .MP	.ST	.9	.27	4700	37	250	605	.DA .PU .D1		
								4784			627			10
								5394			797			
	310001	.65	●	.OP .MP	.ST	.9	.27	10572	82	250	901	.DA .PU .D1		
								10704			933			13
								12484			1186			
	310001	.95	●	.OP .MP	.ST	.9	.27	21598	168	250	1344	.DA .PU .D1		
								21976			1392			20
								25816			1770			
	310001	.125	●	.OP .MP	.ST	.9	.27	36308	282	250	1787	.DA .PU .D1		
								36848			1851			27
								43124			2353			

Reference order | 310001.XX | .SR | .PN | .XX.XX | .ST9.XX.XX

*1 Uplight (UP) is only available for ON-OFF and DALI dimmable (.DA) options, both in 24VdC. La luz indirecta está solo disponible para versiones on-off y regulación DALI (.DA), ambas en 24VdC.
*2 Remote Driver. Driver en remoto.

OPTIONS (.PN)

CABLE CONCENTRATOR	CONNECTION BOX	REF.	FOR MODEL	FINISH
		CB10	.25 .35	●

Reference order | CBXX.XX

CABLE CONCENTRATOR KIT	CONNECTION BOX	REF.	FOR MODEL	FINISH
		SC21	.25 .35	●

Reference order | SCXX.XX

SUSPENSION KIT	REF.	DIMENSION	FINISH
	SC05	5M.	.SA
	SC07	7M.	
	SC10	10M.	

Reference order | SCXX.SA

CENTRAL ROD SUSPENSION*	CONNECTION BOX	REF.	DIMENSIONS	FINISH
		SC20	.60 600mm	●
			.80 800mm	
			.100 1000mm	

Luminaire .95 and .125 require 3 rod suspensions.
Luminarias .95 y .125 requieren 3 tijas.

Reference order | SC20.XX.XX

Select finishes




- ALUMINUM PC
- 0°
- 0°
- CRI ≥90
- IK05
- IP40
- LIFE 50000H
- DIM OPTIONAL
- INTEGRATED
- RECORD
- 220-240 V 50-60 Hz
- CE


ALABAMA SUPER SLIM

REF 310001.PN | 310001.SR


SUSPENSION OPTIONS (.PN)

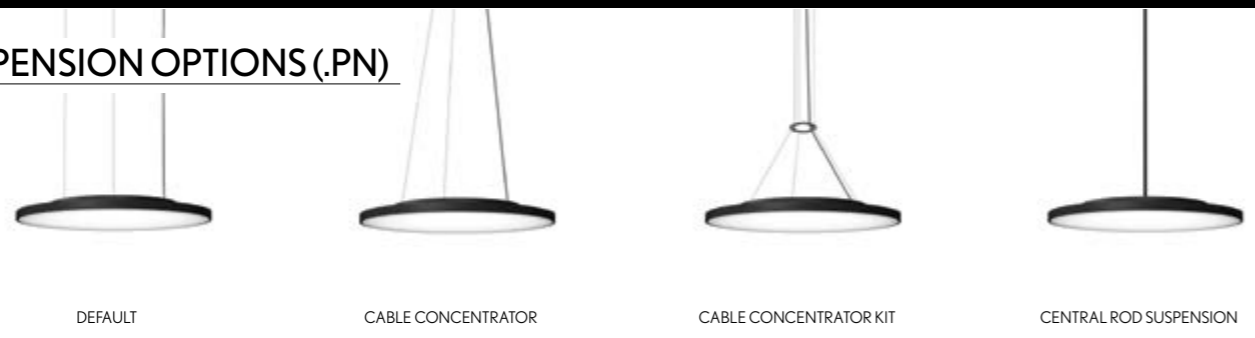

PHOTOMETRY

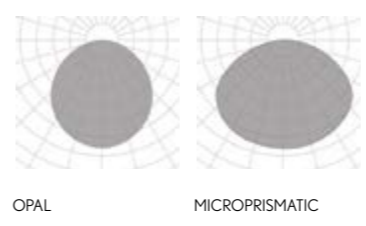

INCLUDED (.PN)



PROFILE

