

new



FINISHES

● COLORS



DIMENSIONS

● DIAMETERS mm. | HEIGHT 63 mm.

350 | 450

LIGHTING OPTIONS

■ DIFFUSERS

OPAL | MICROPRISMATIC

POWERS

STANDARD

CRI

90

COLOR TEMPERATURES

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION OPTIONS

DOWN

LUMINAIRE INCLUDES

Movable component for fastening to the ceiling.
Central Rod Suspension + Connection Box (SC20.60) with luminaire's finish



ON DEMAND

Special RAL Color
Number of switches
Emergency Lighting*
Motion Detection
Wireless Control Options (Casambi)

* Delivered separately
(not installed in luminaire).

INSTALLATIONS



ALABAMA SUPER SLIM TILT

REF310007 .PN



.PN
PENDANT

-310007 ALABAMA SUPER SLIM TILT
| PN - Pag. 62



PENDANT

.PN

ALABAMA SUPER SLIM TILT	REF.	DIMENSION	FINISH	DIFFUSER	POWER	CRI	K	LUMEN	WATT	mA	DIMM OP.	SKETCH
	310007	.35	●	.OP .MP	.ST	.9	.27	2350	26	250	.DA .PU .D1	
							.30	2392				
							.40	2697				
	310007	.45	●	.OP .MP	.ST	.9	.27	4700	40	250	.DA .PU .D1	
							.30	4784				
							.40	5394				

Reference order | 310007.XX.PN.XX.XX.ST9.XX.XX

SUSPENSION ROD	REF.	DIMENSIONS	FINISH
	SC20	.80 800mm	●
		.100 1000mm	

Reference order | SC20.XX.XX




Select finishes



ALABAMA SUPER SLIM TILT


REF 310007.PN

PHOTOMETRY

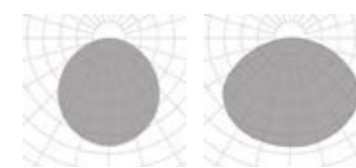


OPAL MICROPRISMATIC

INCLUDED

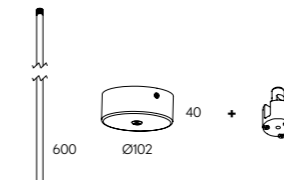

SUSPENSION ROD SC20.60

PROFILE



PENDANT

.PN