



FINISHES

● COLORS



DIMENSIONS

DIAMETERS mm.	HEIGHT	114 mm.
350 450 650 950 1250		

LIGHTING OPTIONS

■ DIFFUSERS

OPAL | MICROPRISMATIC

POWERS

STANDARD | HIGH

CRI

90

COLOR TEMPERATURES

2700K | 3000K | 4000K | TW

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION OPTIONS

DOWN | UP-DOWN

LUMINAIRE INCLUDES

.PN

3 x Suspension cables 3m
 NON-DIM DOWN: 1 x Feed Hose 3 x 0,75mm²
 DIM DOWN or NON-DIM DOWN-UP: 1 x Feed Hose 5 x 0,75mm²
 DIM DOWN-UP (only): 1 x Feed Hose 5 x 0,75mm²
 Connection box CB03 with luminaire's finish

.SR

Surface mounting kit



ON DEMAND

Special RAL Color
 Special Color Temperature
 Number of switches
 Emergency Lighting*
 CRI 80
 Motion Detection
 RGB
 Wireless Control Options (Casambi)

* Delivered separately
 (not installed in luminaire).

INSTALLATIONS



REF 10158.PN | 10158.SR

.PN
PENDANT

·10158 ALABAMA | PN
Pag. 78

.SR
SURFACE


·10158 ALABAMA | SR
Pag. 78

.RF
RECESSED FRAME

·10158 ALABAMA | RF
Pag. 396

.TR
TRIMLESS

·10158 ALABAMA | TR
Pag. 580



ALABAMA	REF.	DIMENSION	FINISH	DIFFUSER	POWER	CRI	K	DOWNLIGHT			UPLIGHT ▲.UP*2		DIMM ▼	SKETCH							
								LUMEN	WATT	mA	LUMEN	WATT									
	10158	.35	●	.OP .MP	.ST	.9	.27	-	18	500	-	7	.DA .PU .D1								
								2385			474										
								2475			603										
								.8	TW*1	-	-	-	-		-	-	-	-	-	-	-
										.27	.9	-	35		500	-	15	.DA .PU .D1			
												4767				1016					
4956	1291																				
.45	●	.OP .MP	.ST	.9	.27	4590	35			500	605	9	.DA .PU .D1								
						4770					627										
						4950		797													
						.8	TW*1	11400-11820	76	700	-	-	-		-	-	-	-			
								.27	.9	9180	71	500	1298		19	.DA .PU .D1					
										9534			1343								
9912	1708																				
.65	●	.OP .MP	.ST	.9	.27			9180	71	500	901	13	.DA .PU .D1								
								9540			933										
						9900	1186														
						.8	TW*1	22800-23640	152	700	-	-	-		-	-	-	-			
								.27	.9	18360	142	500	1932		29	.DA .PU .D1					
										19068			1999								
19824	2541																				
.95	●	.OP .MP	.ST	.9	.27			16830	130	500	1344	20	.DA .PU .D1								
								17490			1392										
						18150	1770														
						.8	TW*1	41800-43340	279	700	-	-	-		-	-	-	-			
								.27	.9	33660	260	500	2882		43	.DA .PU .D1					
										34958			2982								
36344	3791																				
.125	●	.OP .MP	.ST	.9	.27			27540	212	500	1787	27	.DA .PU .D1								
								28620			1851										
						29700	2353														
						.8	TW*1	68400-70920	457	700	-	-	-		-	-	-	-			
								.27	.9	55080	425	500	3832		57	.DA .PU .D1					
										57204			3965								
59472	5041																				

Reference order | 10158.XX | .SR | .PN | .XX.XX.XX.XX.XX.XX.XX

OPTIONS (.PN)

CABLE CONCENTRATOR	CONNECTION BOX	REF.	FOR MODEL	FINISH
		CB10	.35	●
		CB02	.45 .65	
		CB05	.95 .125	

Reference order | CBXX.XX

CABLE CONCENTRATOR KIT	CONNECTION BOX	REF.	FOR MODEL	FINISH
		SC21	.35	●
		SC22	.45 .65	
		SC23	.95 .125	

Reference order | SCXX.XX

SUSPENSION KIT	REF.	DIMENSION	FINISH
	SC05	5M.	.SA
	SC07	7M.	
	SC10	10M.	

Reference order | SCXX.SA

CENTRAL ROD SUSPENSION*	CONNECTION BOX	REF.	DIMENSIONS	FINISH
		SC20	.60 600mm	●
			.80 800mm	
			.100 1000mm	

Luminaire .95 and .125 require 3 rod suspensions.
Luminarias .95 y .125 requieren 3 tijas.


Reference order | SC20.XX.XX

● Select finishes




*1 Tunable White (TW) values correspond to 2700K and 6500K - TW is only available for DALI DT8 dimmable (DA), CRI 80 (8) 700mA. Los valores del blanco dinámico (TW) corresponden a 2700K y 6500K. -TW solo está disponible con protocolo DALI DT8 (DA), CRI 80 (8) 700mA.
*2 Uplight (UP) is only available for ON-OFF and DALI dimmable (DA) options, both in 24VdC. La luz indirecta está solo disponible para versiones on-off y regulación DALI (DA), ambas en 24VdC.

PHOTOMETRY



INCLUDED (.PN)

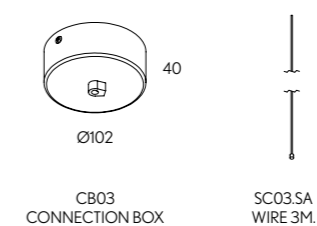

PROFILE



ALABAMA

REF 10158.PN | 10158.SR

SR
PN
PENDANT | SURFACE



FINISHES

● COLORS



DIMENSIONS

● DIAMETERS mm.

350 | 450 | 650 | 950 | 1250

LIGHTING OPTIONS

■ DIFFUSERS

OPAL | MICROPRISMATIC

POWERS

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K | TW

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION OPTIONS

DOWN

LUMINAIRE INCLUDES

Recessed with frame mounting kit



ON DEMAND

Special RAL Color
Special Color Temperature
Number of switches
Emergency Lighting*
CRI 80
Motion Detection
RGB
Wireless Control Options (Casambi)

* Accessories are delivered separately
(not installed in luminaire).

INSTALLATIONS



ALABAMA

REF 10158.RF

.PN
PENDANT

·10158 ALABAMA|PN
Pag. 78

.SR
SURFACE


·10158 ALABAMA|SR
Pag. 78

.RF
RECESSED FRAME

·10158 ALABAMA|RF
Pag. 396

.TR
TRIMLESS

·10158 ALABAMA|TR
Pag. 580



ALABAMA	REF.	DIMENSION	FINISH	DIFFUSER	POWER	CRI	K	LUMEN	WATT	mA	DIMM	SKETCH				
	10158	.35	●	.OP .MP	.ST	.9	.27	-	18	500	.DA .PU .D1					
							.30	2385								
							.40	2475								
							.8	.TW *	-	-			-			
								.9	.27	-			35	500	.DA .PU .D1	
									.30	4767						
	.40	4956														
		10158	.45	●	.OP .MP	.ST	.9	.27	4590	35	500	.DA .PU .D1				
								.30	4770							
								.40	4950							
								.8	.TW *	11400-11820	76			700	.DA	
									.9	.27	9180			71		500
.30										9534						
.40		9912														
		10158	.65	●	.OP .MP	.ST	.9	.27	9180	71	500	.DA .PU .D1				
								.30	9540							
								.40	9900							
								.8	.TW *	22800-23640	152			700	.DA	
									.9	.27	18360			142		500
	.30									19068						
	.40	19824														
		10158	.95	●	.OP .MP	.ST	.9	.27	16830	130	500	.DA .PU .D1				
								.30	17490							
								.40	18150							
								.8	.TW *	41800-43340	279			700	.DA	
									.9	.27	33660			260		500
.30										34958						
.40		36344														
		10158	.125	●	.OP .MP	.ST	.9	.27	27540	212	500	.DA .PU .D1				
								.30	28620							
								.40	29700							
								.8	.TW *	68400-70920	457			700	.DA	
									.9	.27	55080			425		500
	.30									57204						
	.40	59472														

Reference order | 10158.XX.RF.XX.XX.XX.XX.XX




.RF
RECESSED FRAME

ALABAMA


REF 10158.RF

- ALUMINUM PC
- 0°
- 0°
- CRI ≥90
- IK05
- IP20
- LIFE 50000H
- DIM OPTIONAL
- INTEGRATED
- RECOIL
- RECOIL
- 220-240 V 50-60 Hz
- CE

PHOTOMETRY

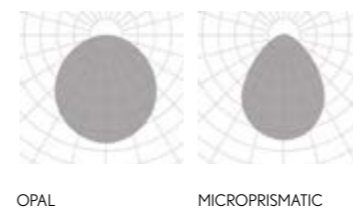

INCLUDED



PROFILE



● Select external finishes





FINISHES

● COLORS



DIMENSIONS

● DIAMETERS mm.

350 | 450 | 650 | 950 | 1250

LIGHTING OPTIONS

■ DIFFUSERS

OPAL | MICROPRISMATIC

POWERS

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K | TW

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION OPTIONS

DOWN

LUMINAIRE INCLUDES

Trimless mounting kit



ON DEMAND

Special RAL Color
Special Color Temperature
Number of switches
Emergency Lighting*
CRI 80
Motion Detection
RGB
Wireless Control Options (Casambi)

* Accessories are delivered separately
(not installed in luminaire).

INSTALLATIONS



ALABAMA

REF 10158.TR

.PN
PENDANT

-10158 ALABAMA | PN
Pag. 78

.SR
SURFACE



-10158 ALABAMA | SR
Pag. 78

.RF
RECESSED FRAME

-10158 ALABAMA | RF
Pag. 396

.TR
TRIMLESS

-10158 ALABAMA | TR
Pag. 580



ALABAMA	REF.	DIMENSION	FINISH	DIFFUSER	POWER	CRI	K	LUMEN	WATT	mA	DIMM	SKETCH
	10158	.35	●	.OP .MP	.ST	.9	.27	-	18	500	.DA .PU .D1	
							.30	2385				
							.40	2475				
					.HI	.9	.8	.TW	-	-	.DA	
							.27	-	35	500	.DA .PU .D1	
								.30				
.40	4956											

	10158	.45	●	.OP .MP	.ST	.9	.27	4590	35	500	.DA .PU .D1		
							.30	4770					
							.40	4950					
					.HI	.9	.8	.TW	11400-11820	76	700		.DA
							.27	9180	71	500	.DA .PU .D1		
								.30					9534
.40	9912												

	10158	.65	●	.OP .MP	.ST	.9	.27	9180	71	500	.DA .PU .D1		
							.30	9540					
							.40	9900					
					.HI	.9	.8	.TW	22800-23640	152	700		.DA
							.27	18360	142	500	.DA .PU .D1		
								.30					19068
.40	19824												

	10158	.95	●	.OP .MP	.ST	.9	.27	16830	130	500	.DA .PU .D1		
							.30	17490					
							.40	18150					
					.HI	.9	.8	.TW	41800-43340	279	700		.DA
							.27	33660	260	500	.DA .PU .D1		
								.30					34958
.40	36344												

	10158	.125	●	.OP .MP	.ST	.9	.27	27540	212	500	.DA .PU .D1		
							.30	28620					
							.40	29700					
					.HI	.9	.8	.TW	68400-70920	457	700		.DA
							.27	55080	425	500	.DA .PU .D1		
								.30					57204
.40	59472												

Reference order | 10158.XX.TR.XX.XX.XX.XX.XX



Seamlessly tunable

Adapt to individual needs with the ability to control the color temperature output and enhance the experience.

Perfectamente ajustable

Adaptable a cada necesidad con la capacidad de controlar la salida de temperatura de color y mejorar la experiencia.


ALABAMA

REF 10158.TR


● Select finishes




PHOTOMETRY

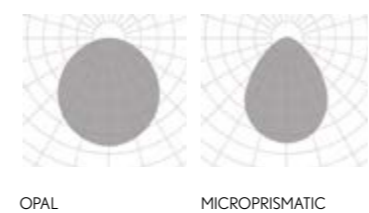

INCLUDED



PROFILE



TR
TRIMLESS