

new



FINISHES

● COLORS



DIMENSIONS

● LENGTHS

PER METER

COMPONENTS

SLIM PATRICIA
SLIM PATRICIA ZOOM
SLIM LED BALL
SLIM TUBE
SLIM WALL WASHER
SLIM LENSES
SLIM MOTION LENSES
SLIM LED MODULES

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10


▲ LIGHT DISTRIBUTION

DOWN

LUMINAIRE INCLUDES

.SR

Surface mounting kit

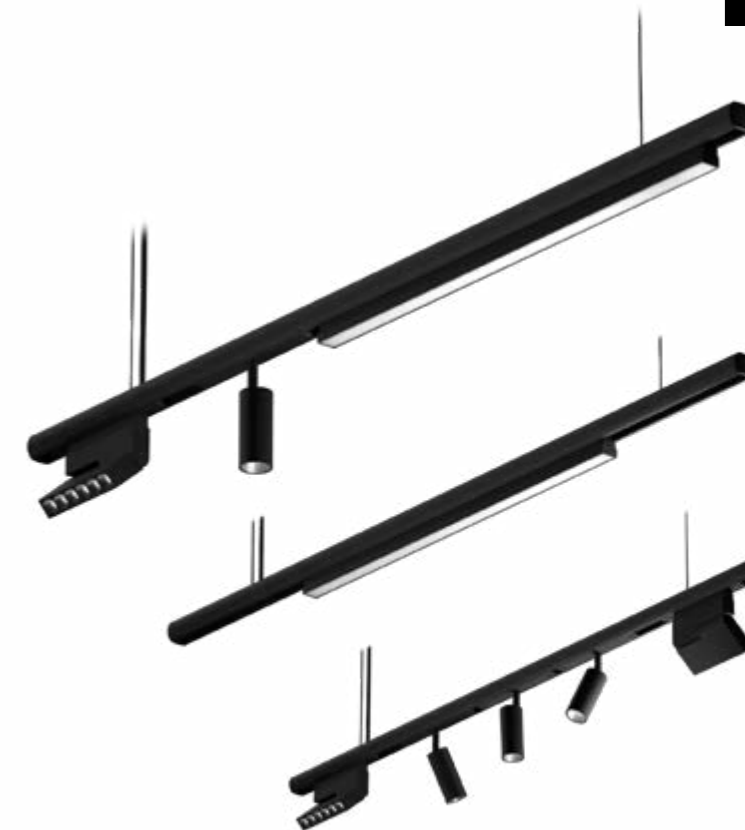

ON DEMAND
Custom dimensions

INSTALLATIONS



.PN
PENDANT

·210019 ALARIK SLIM ROUND | PN
Pag. 184



.SR
SURFACE

·210019 ALARIK SLIM ROUND | SR
Pag. 184



ALARIK SLIM ROUND

REF 210019.PN | 210019.SR



PENDANT | SURFACE
SR
PN

ALARIK SLIM ROUND	REF.	DIMENSION	FINISH	SKETCH
	210019	.01 1m	●	

48V TRANSFORMER	DIMENSION	WATT
DR48	.01	75
	.02	120
	.03	200

Reference order | 210019.XX.PN.XX

Reference order | DR48.XX

SLIM PATRICIA	REF.	DIMENSION	FINISH	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	V _a C	DIMM	SKETCH
	11544	.01	●	.15 .38 .60	.ST	.9	.27	576	8	48	.DA .D1	
							.30	607				
							.40	695				
	11544	.02	●	.15 .38 .60	.ST	.9	.27	1173	15	48	.DA .D1	
							.30	1181				
							.40	1207				

Reference order | 11544.XX.XX.XX.ST9.XX.XX


SLIM PATRICIA ZOOM	REF.	DIMENSION	FINISH	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	V _a C	DIMM	SKETCH
	11546	.01	●	.15-36 .36-60	.ST	.9	.27	2038	25	48	.DA .D1	
							.30	2254				
							.40	2320				

Reference order | 11546.01.XX.XX.ST9.XX.XX

SLIM LED BALL	REF.	DIMENSION	FINISH	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	V _a C	DIMM	SKETCH
	11551	.01	●	.37	.ST	.9	.27	355	8	48	.DA .D1	
							.30	383				
							.40	396				

Reference order | 11551.01.XX.XX.ST9.XX.XX

• Select finishes



SLIM LED TUBE 20	REF.	DIMENSION	FINISH	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	V _a C	DIMM	SKETCH
	11553	.01	●	.20 .40	.ST	.9	.27	174	3	48	.DA .D1	
							.30	187				
							.40	212				

Reference order | 11553.01.XX.XX.ST9.XX.XX

SLIM LED TUBE 40	REF.	DIMENSION	FINISH	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	V _a C	DIMM	SKETCH
	11552	.01	●	.20 .40	.ST	.9	.27	954	14	48	.DA .D1	
							.30	991				
							.40	1067				


Reference order | 11552.01.XX.XX.ST9.XX.XX

SLIM WALL WASHER	REF.	DIMENSION	FINISH	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	V _a C	DIMM	SKETCH
	11550	.01	.BK-BK	-	.ST	.9	.27	882	15	48	.DA .D1	
							.30	1013				
							.40	1107				

Reference order | 11550.01.XX.XX.ST9.XX.XX

SLIM LENSES	REF.	DIMENSION	FINISH	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	V _a C	DIMM	SKETCH
	11548	.06	.BK-BK	.15 .38	.ST	.9	.27	660	8	48	.DA .D1	
							.30	750				
							.40	827				
	11548	.12	.BK-BK	.15 .38	.ST	.9	.27	1320	15	48	.DA .D1	
							.30	1511				
							.40	1654				

Reference order | 11548.XX.XX.XX.ST9.XX.XX

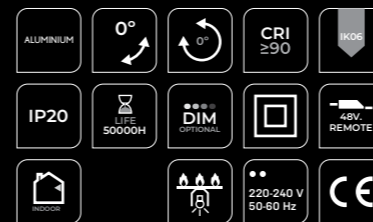


ALARIK SLIM ROUND

REF 210019.PN | 210019.SR

PHOTOMETRY

SLIM PATRICIA

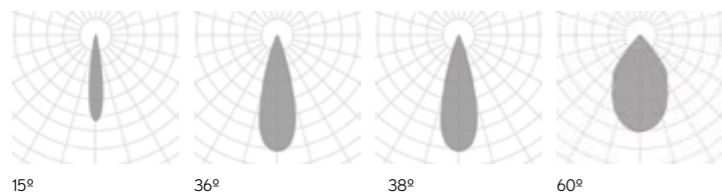


PHOTOMETRY

SLIM LED BALL | SLIM WALL WASHER




PHOTOMETRY

SLIM TUBE | SLIM LENSES

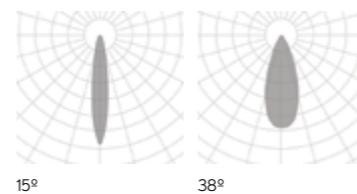

PROFILE



SR
PN
PENDANT | SURFACE

SLIM MOTION LENSES	REF.	DIMENSION	FINISH	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	V _a C	DIMM	SKETCH
	11547	.01	.BK-BK	.15 .38	.ST	.9	.27	660	8	48	.DA .D1	
							.30	750				
							.40	827				

Reference order | 11547.01.XX.XX.ST9.XX.XX

SLIM LED MODULES	REF.	DIMENSION	FINISH	DIFFUSER	POWER	CRI	K	LUMEN	WATT	V _a C	DIMM	SKETCH
	11549	.01	.BK-BK	.OP	.ST	.9	.27	558	9	48	.DA .D1	
							.30	560				
							.40	604				
	11549	.02	.BK-BK	.OP	.ST	.9	.27	1115	18	48	.DA .D1	
							.30	1120				
							.40	1208				
	11549	.03	.BK-BK	.OP	.ST	.9	.27	1670	24	48	.DA .D1	
							.30	1680				
							.40	1812				

Reference order | 11549.XX.XX.XX.ST9.XX.XX

COMPONENTS

COVERT KIT	REF.	FINISH
	TF20	•

Reference order | TF20.SR.PN.XX


SUSPENSION KIT	REF.
	ACC210019.SC

Reference order | ACC210019.SC

SUSPENSION KIT WITH DRIVER BOX	REF.
	ACC210019.PKDB

Reference order | ACC210019.PKDB

• Select finishes



JOINTS & CONNECTORS

LINEAR JOINT CONNECTOR	FINISH	ANGLE JOINT CONNECTOR	FINISH	POWER FEEDER UNIT	FINISH
	•		•		•

ACC210019.UR.XX

ACC210019.UL.XX

ACC210019.CA.XX

LINEAR JOINT	ANGLE JOINT	WALL-CEILING JOINT
	X	X

UR20




PENDANT | SURFACE

ALARIK SLIM ROUND


REF 210019.PN | 210019.SR

- ALUMINIUM
- 0°
- 0°
- CRI ≥90
- IK05
- IP20
- LIFE 50000H
- DIM OPTIONAL
- 48V. REMOTE
- INDOOR
- 220-240 V 50-60 Hz
- CE

PHOTOMETRY

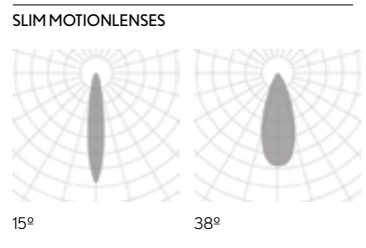

PHOTOMETRY



JOINTS CONNECTORS

