



FINISHES

• COLORS



DIMENSIONS

• PROFILE LENGTHS mm.

843 | 1124 | 1405 | 1686 | 1967 | 2248

LIGHTING OPTIONS

■ DIFFUSERS

OPAL | MICROPRISMATIC

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K | TW

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN | UP-DOWN


LUMINAIRE INCLUDES

.PN

2 x Suspension cables 3m (each 2m)
 NON-DIM DOWN: 1 x Feed Hose 3 x 0,75mm²
 DIM DOWN or NON-DIM DOWN-UP: 1 x Feed Hose 5 x 0,75mm²
 DIM DOWN-UP (only): Cabling 2 circuits, 2 x Feed Hose 5 x 0,75mm²
 Diffuser

.SR

Surface mounting kit

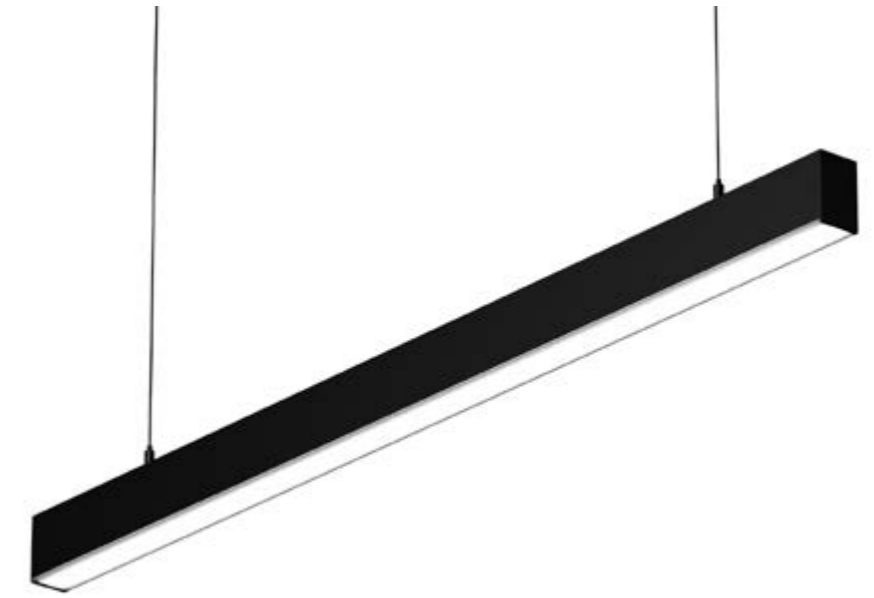

ON DEMAND

Emergency Lighting*
 Motion Detection
 Custom dimensions
 Special Color Temperature
 RGB
 Thematic LED
 Wireless Control Options (Casambi)
 CRI 80

* Delivered separately
 (not installed in luminaire).

INSTALLATIONS



ALBA

REF 10160.PN | 10160.SR

.PN
PENDANT

·10160 ALBA | PN
Pag. 230

.WS
WALL SURFACE

·10160 ALBA | WS
Pag. 786

.TK
TRACK

·10160 ALBA | TK
Pag. 760

.SR
SURFACE


·10160 ALBA | SR
Pag. 230

.RF
RECESSED FRAME

·10160 ALBA | RF
Pag. 444

.TR
TRIMLESS

·10160 ALBA | TR
Pag. 644

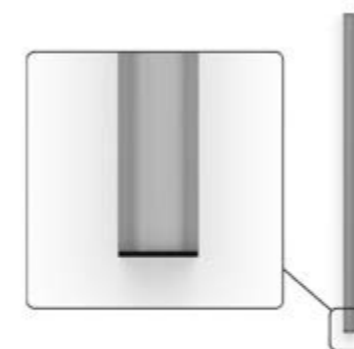

REF.	PROFILE LENGTH		FINISH	DIFFUSER	POWER	CRI	DOWNLIGHT *3 LUMEN				WATT		UPLIGHT .UP *2 LUMEN			WATT		DIMM
	MM	MM					.27	.30	.40	.TW *1	K	TW	.27	.30	.40	K		
10160	.03	843	●	.OP .MP	.ST	.9	2295	2385	2475	5700-5910	18	38	265	274	349	4	.DA .PU .D1	
	.04	1124					3060	3180	3300	7600-7880	24	51	397	411	522	6		
	.05	1405					3825	3975	4125	9500-9850	30	64	529	548	696	8		
	.06	1686					4590	4770	4950	11400-11820	35	76	661	685	870	10		
	.07	1967					5355	5565	5775	13300-13790	41	89	793	822	1044	12		
	.08	2248					6120	6360	6600	15200-15760	47	102	925	958	1218	14		

REF.	PROFILE LENGTH		FINISH	DIFFUSER	POWER	CRI	DOWNLIGHT *3 LUMEN				WATT		UPLIGHT ▲.UP *2 LUMEN			WATT		DIMM
	MM	MM					.27	.30	.40			.27	.30	.40	K			
10160	.03	843	●	.OP .MP	.HI	.9	4590	4767	4956	35	568	587	747	8	.DA .PU .D1			
	.04	1124					6120	6356	6608	47	851	880	1119	13				
	.05	1405					7650	7945	8260	59	1134	1173	1492	17				
	.06	1686					9180	9534	9912	71	1417	1466	1864	21				
	.07	1967					10710	11123	11564	83	1701	1760	2237	25				
	.08	2248					12240	12712	13216	94	1984	2053	2610	30				

Reference order | 10160.XX | .SR | .PN | .XX.XX.XX.9.XX.XX.XX

Total length = Profile length + 20mm + 2x3mm (Cover kit)

● Select finishes



COMPONENTS

COVER KIT	REF.	FINISH
	TF02 2x3mm.	●

REDUGER	REF.	POWER
	ACC.RG	.ST .HI

Reference order | TF02 | .SR | .PN | .XX

Reference order | ACC.RG.XX

JOINTS

LINEAR JOINT	ANGLE JOINT	T-JOINT	CROSS JOINT	WALL-CEILING JOINT	FINISH
					●
UR02	UL02	UT02	UC02	UV02	

Joints, other than Linear joint, require a technical drawing

Reference order | XX02 | .SR | .PN | .XX

OPTIONS (.PN)

SUSPENSION KIT	REF.	DIMEN-SION	FINISH
	SC05	5M.	.SA
	SC07	7M.	
	SC10	10M.	

SUSPENSION ROD	REF.	DIMEN-SIONS	mm	FINISH
	SC21	.60	600	●
		.80	800	
		.100	1000	

Not-included, please select:

CONNECTION BOX	FINISH
	●
CB09.12	

Reference order | SCXX.SA


Reference order | SC21.XX.XX

Reference order | CB09.12.XX

ALBA


REF 10160.PN | 10160.SR

PHOTOMETRY

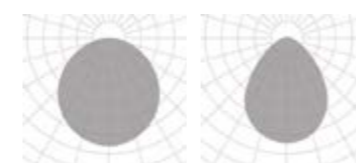


OPAL MICROPRISMATIC

INCLUDED (.PN)



SC03.SA WIRE 3M.

PROFILE



64 43

*1 Tunable White (TW) values correspond to 2700K and 6500K - TW is only available for DALI DT8 dimmable (DA), CRI 80 (8) 700mA. Los valores del blanco dinámico (TW) corresponden a 2700K y 6500K. -TW solo está disponible con protocolo DALI DT8 (DA), CRI 80 (8) 700mA.

*2 Uplight (UP) is only available for ON-OFF and DALI dimmable (DA) options, both in 24VdC. La luz indirecta está solo disponible para versiones on-off y regulación DALI (DA), ambas en 24VdC.

*3 Down light (direct light) works at 500mA. La luz directa trabaja a 500mA.

Some product variations require an IP Box, seek advice from our technical team. Algunas variaciones del producto requieren de una IP Box, consulte con nuestro equipo técnico



FINISHES

● COLORS



DIMENSIONS

◆ PROFILE LENGTHS mm.

843 | 1124 | 1405 | 1686 | 1967 | 2248

LIGHTING OPTIONS

■ DIFFUSERS

OPAL | MICROPRISMATIC

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K | TW

▼ DIMMABLE OPTIONS



DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

LUMINAIRE INCLUDES

Recessed with frame mounting kit

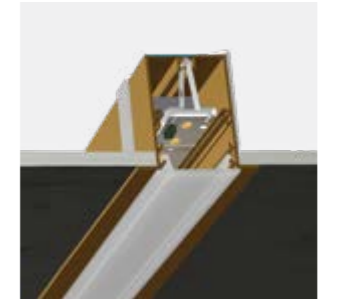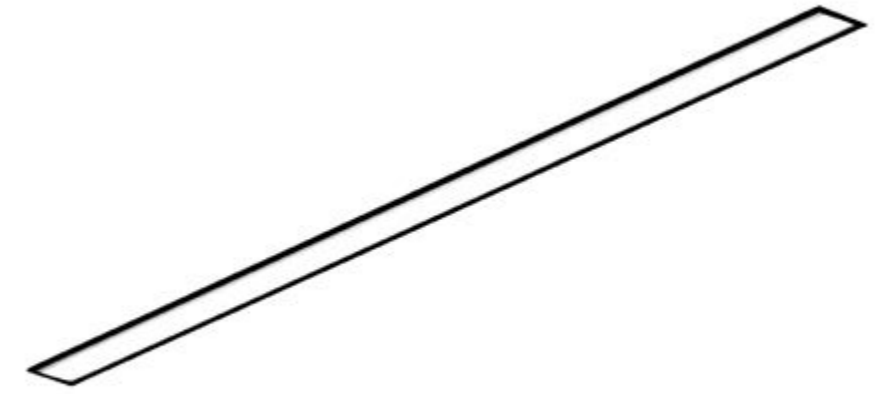

ON DEMAND

Emergency Lighting*
Motion Detection
Well-Certified LED Boards
Taylor your own design
Special Color Temperature
RGB
Thematic LED
Wireless Control Options (Casambi)
CRI 80

* Delivered separately
(not installed in luminaire).

INSTALLATIONS



ALBA

REF 10160.RF

.PN
PENDANT

·10160 ALBA | PN
Pag. 230

.WS
WALL SURFACE

·10160 ALBA | WS
Pag. 786

.TK
TRACK

·10160 ALBA | TK
Pag. 760

.SR
SURFACE



·10160 ALBA | SR
Pag. 230

.RF
RECESSED FRAME

·10160 ALBA | RF
Pag. 444

.TR
TRIMLESS

·10160 ALBA | TR
Pag. 644

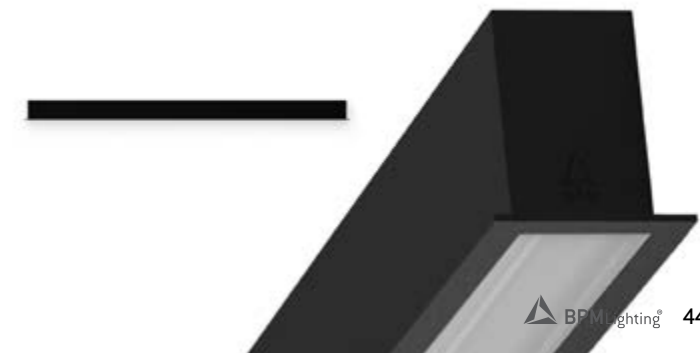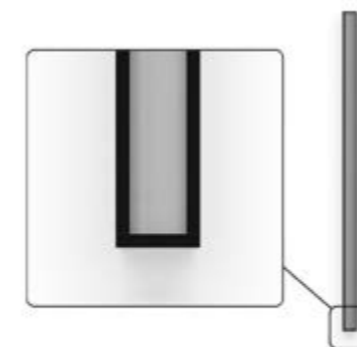




RECESSED FRAME

REF.	PROFILE LENGTH		FINISH	DIFFUSER	POWER	CRI	DOWNLIGHT LUMEN				WATT		DIMM
	MM	MM					.27	.30	.40	.TW*2	K	TW	
10160	.03	843	●	.OP .MP	.ST	.9	2295	2385	2475	5700-5910	18	38	.DA .PU .D1
	.04	1124					3060	3180	3300	7600-7880	24	51	
	.05	1405					3825	3975	4125	9500-9850	30	64	
	.06	1686					4590	4770	4950	11400-11820	35	76	
	.07	1967					5355	5565	5775	13300-13790	41	89	
	.08	2248					6120	6360	6600	15200-15760	47	102	

REF.	PROFILE LENGTH		FINISH	DIFFUSER	POWER	CRI	DOWNLIGHT LUMEN			WATT	DIMM
	MM	MM					.27	.30	.40		
10160	.03	843	●	.OP .MP	.HI	.9	4590	4767	4956	35	.DA .PU .D1
	.04	1124					6120	6356	6608	47	
	.05	1405					7650	7945	8260	59	
	.06	1686					9180	9534	9912	71	
	.07	1967					10710	11123	11564	83	
	.08	2248					12240	12712	13216	94	


Reference order | 10160.XX.RF.XX.XX.XX9.XX.XX

 Total length = Profile length + 10mm + 2x8mm (Cover kit)
 (Total length - 8mm) x 51mm
 100mm


● Select finish



COMPONENTS






COVER KIT	REF.	FINISH
	TF02 2x8mm.	●

Reference order | TF02.RF.XX

REDUGER	REF.	POWER
	ACC.RG	.ST .HI

Reference order | ACC.RG.XX

JOINTS

LINEAR JOINT	ANGLE JOINT	T-JOINT	CROSS JOINT	WALL-CEILING JOINT	FINISH
					●
UR02	UA02	UT02	UX02	UV02	


Joints, other than Linear joint, require a technical drawing

Reference order | XX02.RF.XX

ALBA

REF 10160.RF

PHOTOMETRY

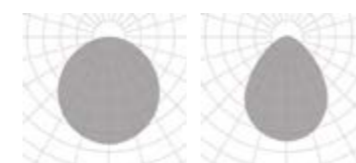

OPAL


MICROPRISMATIC

INCLUDED



RF INSTALLATION KIT

PROFILE



*1 Tunable White (TW) values correspond to 2700K and 6500K - TW is only available for DALI DT8 dimmable (.DA), CRI 80 (8) 700mA. Los valores del blanco dinámico (TW) corresponden a 2700K y 6500K. -TW solo está disponible con protocolo DALI DT8 (.DA), CRI 80 (8) 700mA.
 *2 Down light (direct light) works at 500mA. La luz directa trabaja a 500mA.

RECESSED FRAME

.RF



FINISHES

● COLORS



DIMENSIONS

◆ PROFILE LENGTHS mm.

843 | 1124 | 1405 | 1686 | 1967 | 2248

LIGHTING OPTIONS

■ DIFFUSERS

OPAL | MICROPRISMATIC

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K | TW

▼ DIMMABLE OPTIONS



DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

LUMINAIRE INCLUDES

Trimless mounting kit

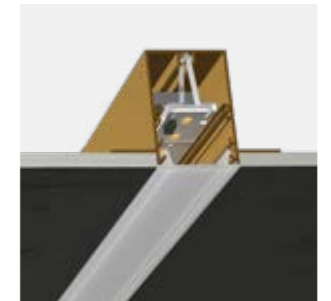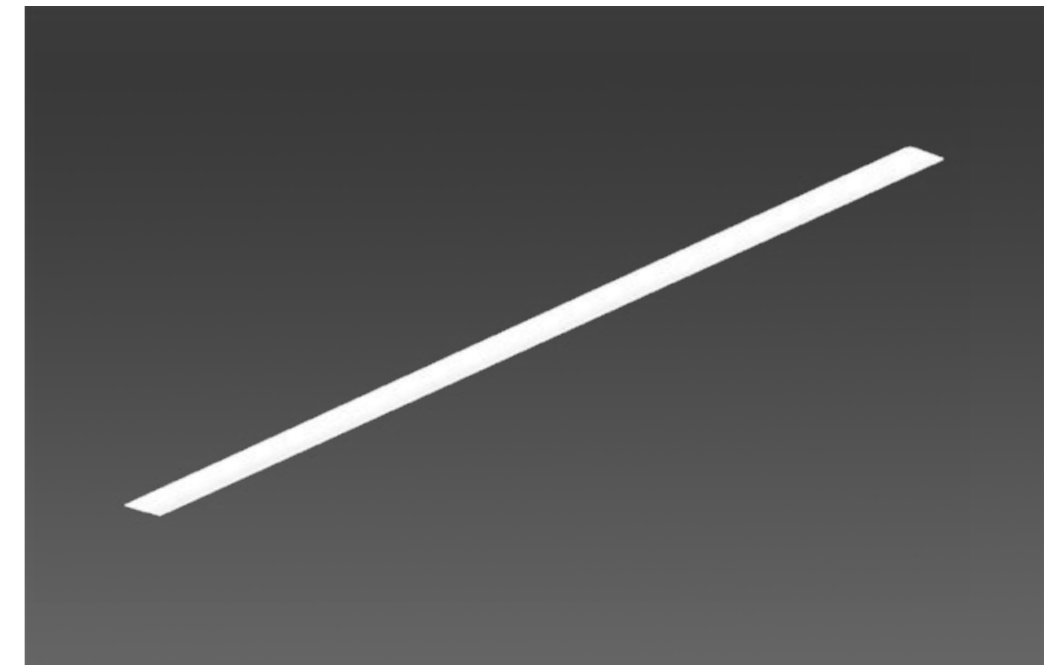

ON DEMAND

Emergency Lighting*
Motion Detection
Custom dimensions
Special Color Temperature
RGB
Thematic LED
Wireless Control Options (Casambi)
CRI 80

* Delivered separately
(not installed in luminaire).

INSTALLATIONS



ALBA

REF 10160.TR

.PN
PENDANT

·10160 ALBA|PN
Pag. 230

.WS
WALL SURFACE

·10160 ALBA|WS
Pag. 786

.TK
TRACK

·10160 ALBA|TK
Pag. 760

.SR
SURFACE



·10160 ALBA|SR
Pag. 230

.RF
RECESSED FRAME

·10160 ALBA|RF
Pag. 444

.TR
TRIMLESS

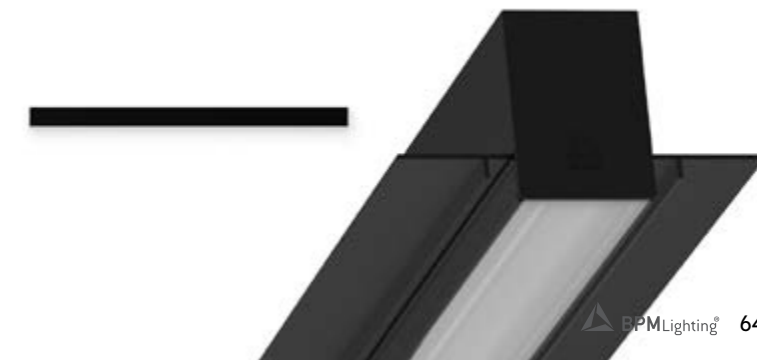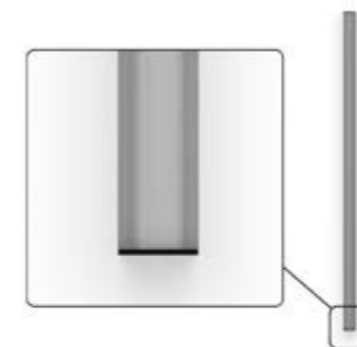


·10160 ALBA|TR
Pag. 644



REF.	PROFILE LENGTH		FINISH	DIFFUSER	POWER	CRI	DOWNLIGHT LUMEN				WATT		DIMM
	MM	MM					.27	.30	.40	.TW*2	K	TW	
10160	.03	843	●	.OP .MP	.ST	.9	2295	2385	2475	5700-8520	18	38	.DA .PU .D1
	.04	1124					3060	3180	3300	7600-11360	24	51	
	.05	1405					3825	3975	4125	9500-14200	30	64	
	.06	1686					4590	4770	4950	11400-17040	35	76	
	.07	1967					5355	5565	5775	13300-19880	41	89	
	.08	2248					6120	6360	6600	15200-22720	47	102	

REF.	PROFILE LENGTH		FINISH	DIFFUSER	POWER	CRI	DOWNLIGHT LUMEN			WATT		DIMM
	MM	MM					.27	.30	.40	K	TW	
10160	.03	843	●	.OP .MP	.HI	.9	4590	4767	4956	35		.DA .PU .D1
	.04	1124					6120	6356	6608	47		
	.05	1405					7650	7945	8260	59		
	.06	1686					9180	9534	9912	71		
	.07	1967					10710	11123	11564	83		
	.08	2248					12240	12712	13216	94		


Reference order | 10160.XX.TR.XX.XX.XX.XX.XX.XX

-  Total length = Profile length + 10mm + 2x2mm (Cover kit)
-  (Total length + 2mm) x 65mm
-  100mm


● Select finish



COMPONENTS






COVER KIT	REF.	FINISH
	TF02 2x2mm.	●

Reference order | TF02.TR.XX

REDUGER	REF.	POWER
	ACC.RG	.ST .HI

Reference order | ACC.RG.XX

JOINTS

LINEAR JOINT	ANGLE JOINT	T-JOINT	CROSS JOINT	WALL-CEILING JOINT	FINISH
					●
UR02	UA02	UT02	UX02	UV02	


Joints, other than Linear joint, require a technical drawing

Reference order | XX02.TR.XX

ALBA

REF 10160.TR


PHOTOMETRY

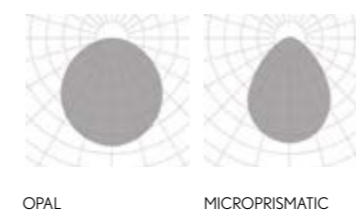

OPAL


MICROPRISMATIC

PROFILE

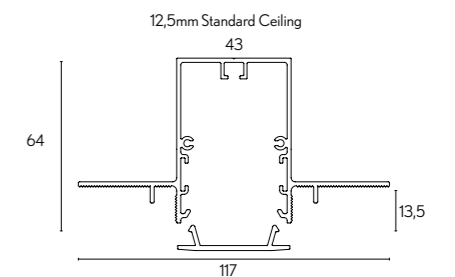

*1 Tunable White (TW) values correspond to 2700K and 6500K - TW is only available for DALI DT8 dimmable (.DA), CRI 80 (.8) 700mA. Los valores del blanco dinámico (TW) corresponden a 2700K y 6500K. -TW solo está disponible con protocolo DALI DT8 (.DA), CRI 80 (.8) 700mA.
*2 Down light (direct light) works at 500mA. La luz directa trabaja a 500mA.

new

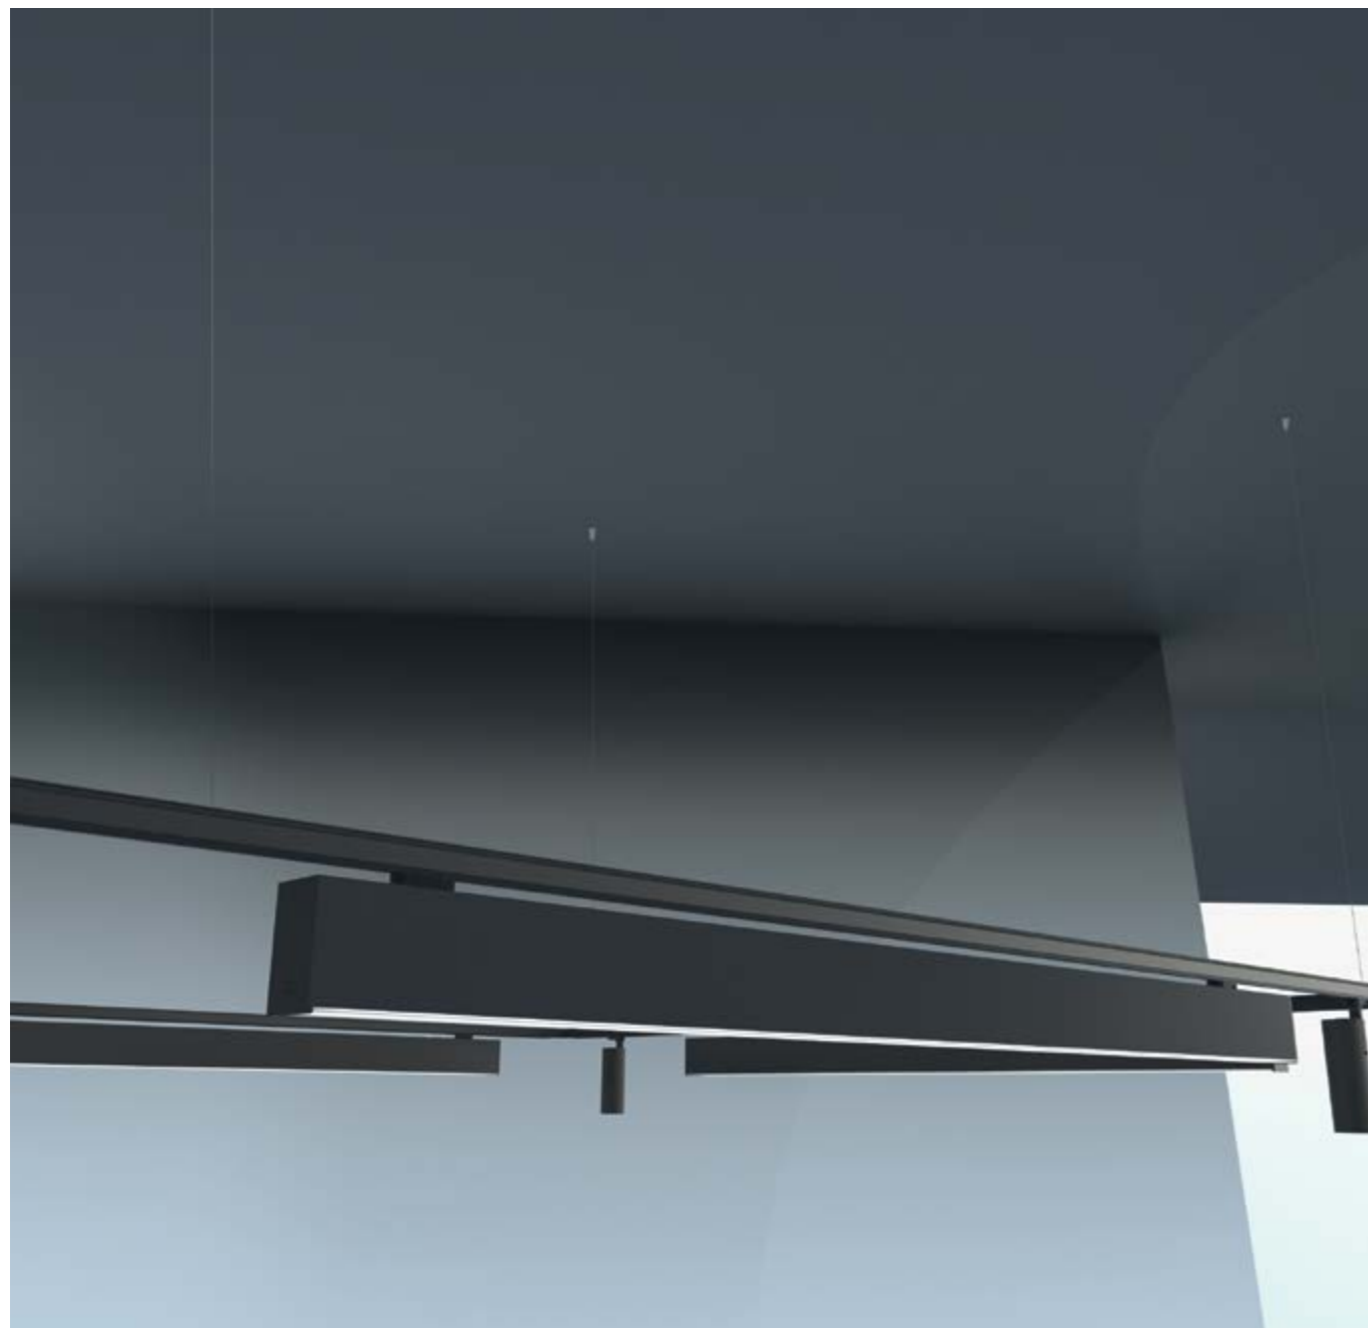

FINISHES

● COLORS



DIMENSIONS

◆ PROFILE LENGTHS mm.

843 | 1124 | 1405 | 1686 | 1967 | 2248

LIGHTING OPTIONS

■ DIFFUSERS

OPAL | MICROPRISMATIC

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K | TW

▼ DIMMABLE OPTIONS


DALI | 1.10 |

▲ LIGHT DISTRIBUTION

DOWN

LUMINAIRE INCLUDES

Track adapter
Diffuser
Electric system



ON DEMAND

Emergency Lighting*
Motion Detection
Custom dimensions
Special Color Temperature
RGB
Thematic LED
Wireless Control Options (Casambi)
CRI 80

* Delivered separately
(not installed in luminaire).

TRACKLIGHT

INSTALLATIONS

.PN
PENDANT

·10160 ALBA | PN
Pag. 230

.WS
WALL SURFACE

·10160 ALBA | WS
Pag. 786

.TK
TRACK

·10160 ALBA | TK
Pag. 760

.SR
SURFACE

·10160 ALBA | SR
Pag. 230

.RF
RECESSED FRAME

·10160 ALBA | RF
Pag. 444


.TR
TRIMLESS

·10160 ALBA | TR
Pag. 644



ALBA

REF 10160.TK

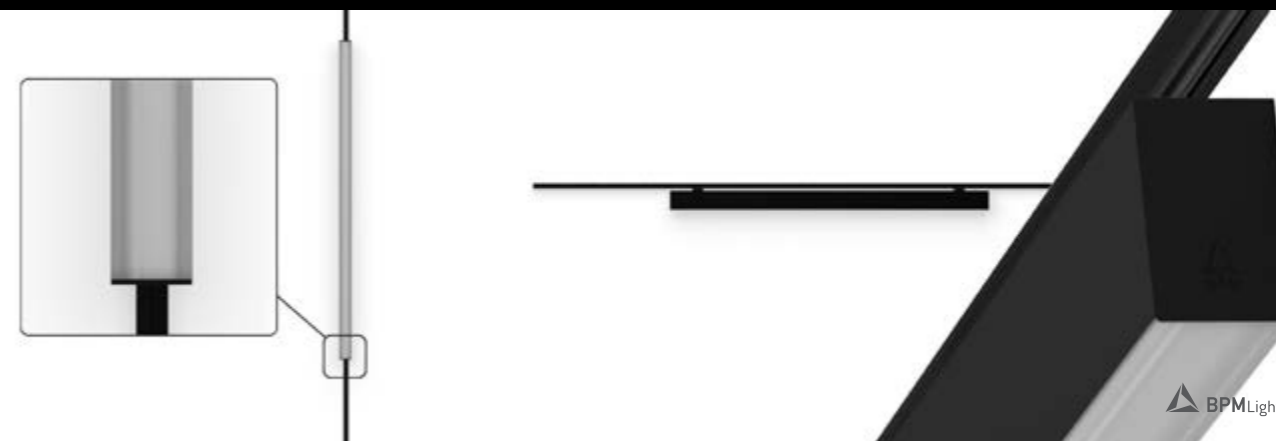

REF.	PROFILE LENGTH		FINISH	DIFFUSER	POWER	CRI	DOWNLIGHT *2 LUMEN				WATT		DIMM
	MM	MM					.27	.30	.40	.TW *1	K	TW	
10160	.03	843	●	.OP .MP	.ST	.9	2295	2385	2475	5700-5910	18	38	.DA .D1
	.04	1124					3060	3180	3300	7600-7880	24	51	
	.05	1405					3825	3975	4125	9500-9850	30	64	
	.06	1686					4590	4770	4950	11400-11820	35	76	
	.07	1967					5355	5565	5775	13300-13790	41	89	
	.08	2248					6120	6360	6600	15200-15760	47	102	

REF.	PROFILE LENGTH		FINISH	DIFFUSER	POWER	CRI	DOWNLIGHT *2 LUMEN			WATT	DIMM
	MM	MM					.27	.30	.40		
10160	.03	843	●	.OP .MP	.HI	.9	4590	4767	4956	35	.DA .D1
	.04	1124					6120	6356	6608	47	
	.05	1405					7650	7945	8260	59	
	.06	1686					9180	9534	9912	71	
	.07	1967					10710	11123	11564	83	
	.08	2248					12240	12712	13216	94	

Reference order | 10160.XX.TK.XX.XX.XX.XX.XX.XX.XX

Total length = Profile length + 20mm + 2x3mm (Cover kit).

Select finishes




COMPONENTS

COVER KIT	REF.	FINISH
	TF02	●

Reference order | TF02.TK.XX

REDUGER	REF.	POWER
	ACC.RG	.ST .HI

Reference order | ACC.RG.XX

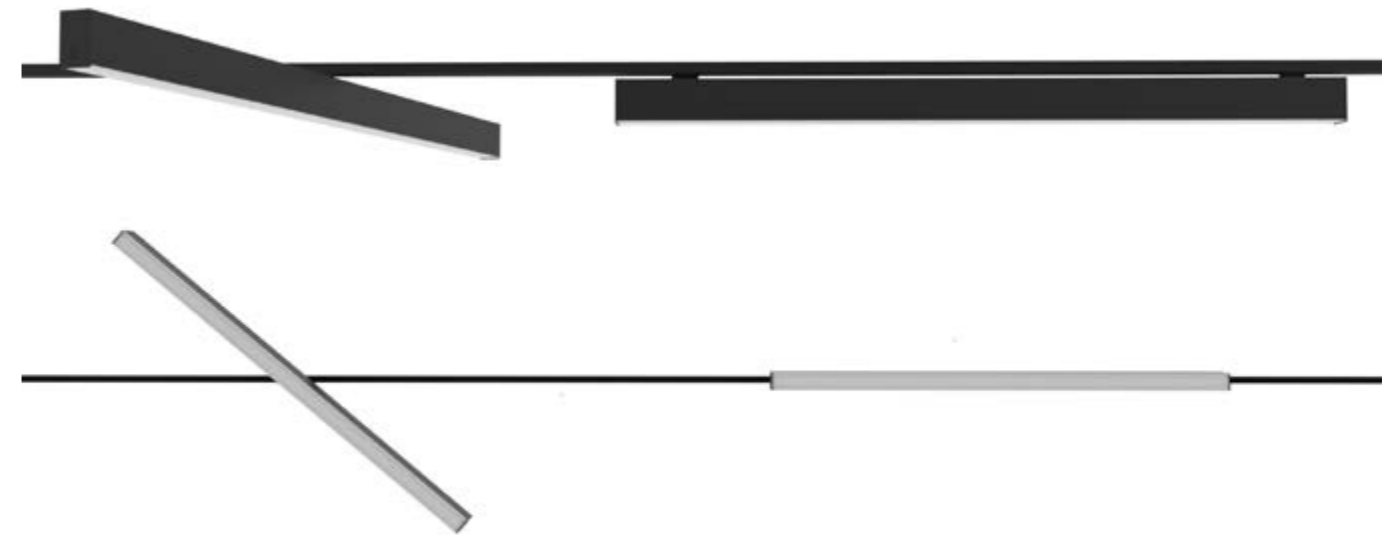


TRACKLIGHT

ALBA

REF 10160.TK



PHOTOMETRY

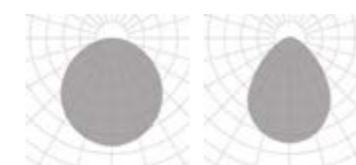


OPAL MICROPRISMATIC

INCLUDED



ACC.ADP

PROFILE



*1 Tunable White (TW) values correspond to 2700K and 6500K - TW is only available for DALI DT8 dimmable (.DA), CRI 80 (.8) 700mA. Los valores del blanco dinámico (TW) corresponden a 2700K y 6500K. -TW solo está disponible con protocolo DALI DT8 (.DA), CRI 80 (.8) 700mA.
*2 Down light (direct light) works at 500mA. La luz directa trabaja a 500mA.



FINISHES

● COLORS



DIMENSIONS

◆ LENGTHS mm.

307 | 447 | 588

LIGHTING OPTIONS

■ DIFFUSERS

OPAL | MICROPRISMATIC

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K | TW

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

LUMINAIRE INCLUDES

Wall surface mounting kit
Cover Kit



ON DEMAND

Emergency Lighting*
Motion Detection
Custom dimensions
Special Color Temperature
RGB
Thematic LED
Wireless Control Options (Casambi)
CRI 80

* Delivered separately
(not installed in luminaire).

.WS

WALL SURFACE

INSTALLATIONS

.PN
PENDANT

·10160 ALBA | PN
Pag. 230

.WS
WALL SURFACE

·10160 ALBA | WS
Pag. 786

.TK
TRACK

·10160 ALBA | TK
Pag. 760

.SR
SURFACE

·10160 ALBA | SR
Pag. 230

.RF
RECESSED FRAME

·10160 ALBA | RF
Pag. 444


.TR
TRIMLESS

·10160 ALBA | TR
Pag. 644



ALBA


REF 10160.WS

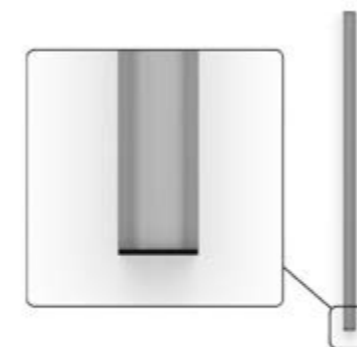

REF.	DIMENSION		FINISH	DIFFUSER	POWER	CRI	DOWNLIGHT LUMEN				WATT		DIMM
	MM	MM					.27	.30	.40	.TW*2	K	TW	
10160	.01	307	●	.OP .MP	.ST	.9	765	795	825	1900-1970	6	13	.DA .PU .D1
	.02	447					1148	1193	1238	2850-2955	9	19,5	
	.03	588					1530	1590	1650	3800-3940	12	26	

REF.	DIMENSION		FINISH	DIFFUSER	POWER	CRI	DOWNLIGHT LUMEN			WATT		DIMM
	MM	MM					.27	.30	.40	K	TW	
10160	.01	307	●	.OP .MP	.HI	.9	1530	1589	1652	12		.DA .PU .D1
	.02	447					2295	2384	2478	18		
	.03	588					3060	3178	3304	24		

Reference order | 10160.XX.WS.XX.XX.XX.9.XX.XX

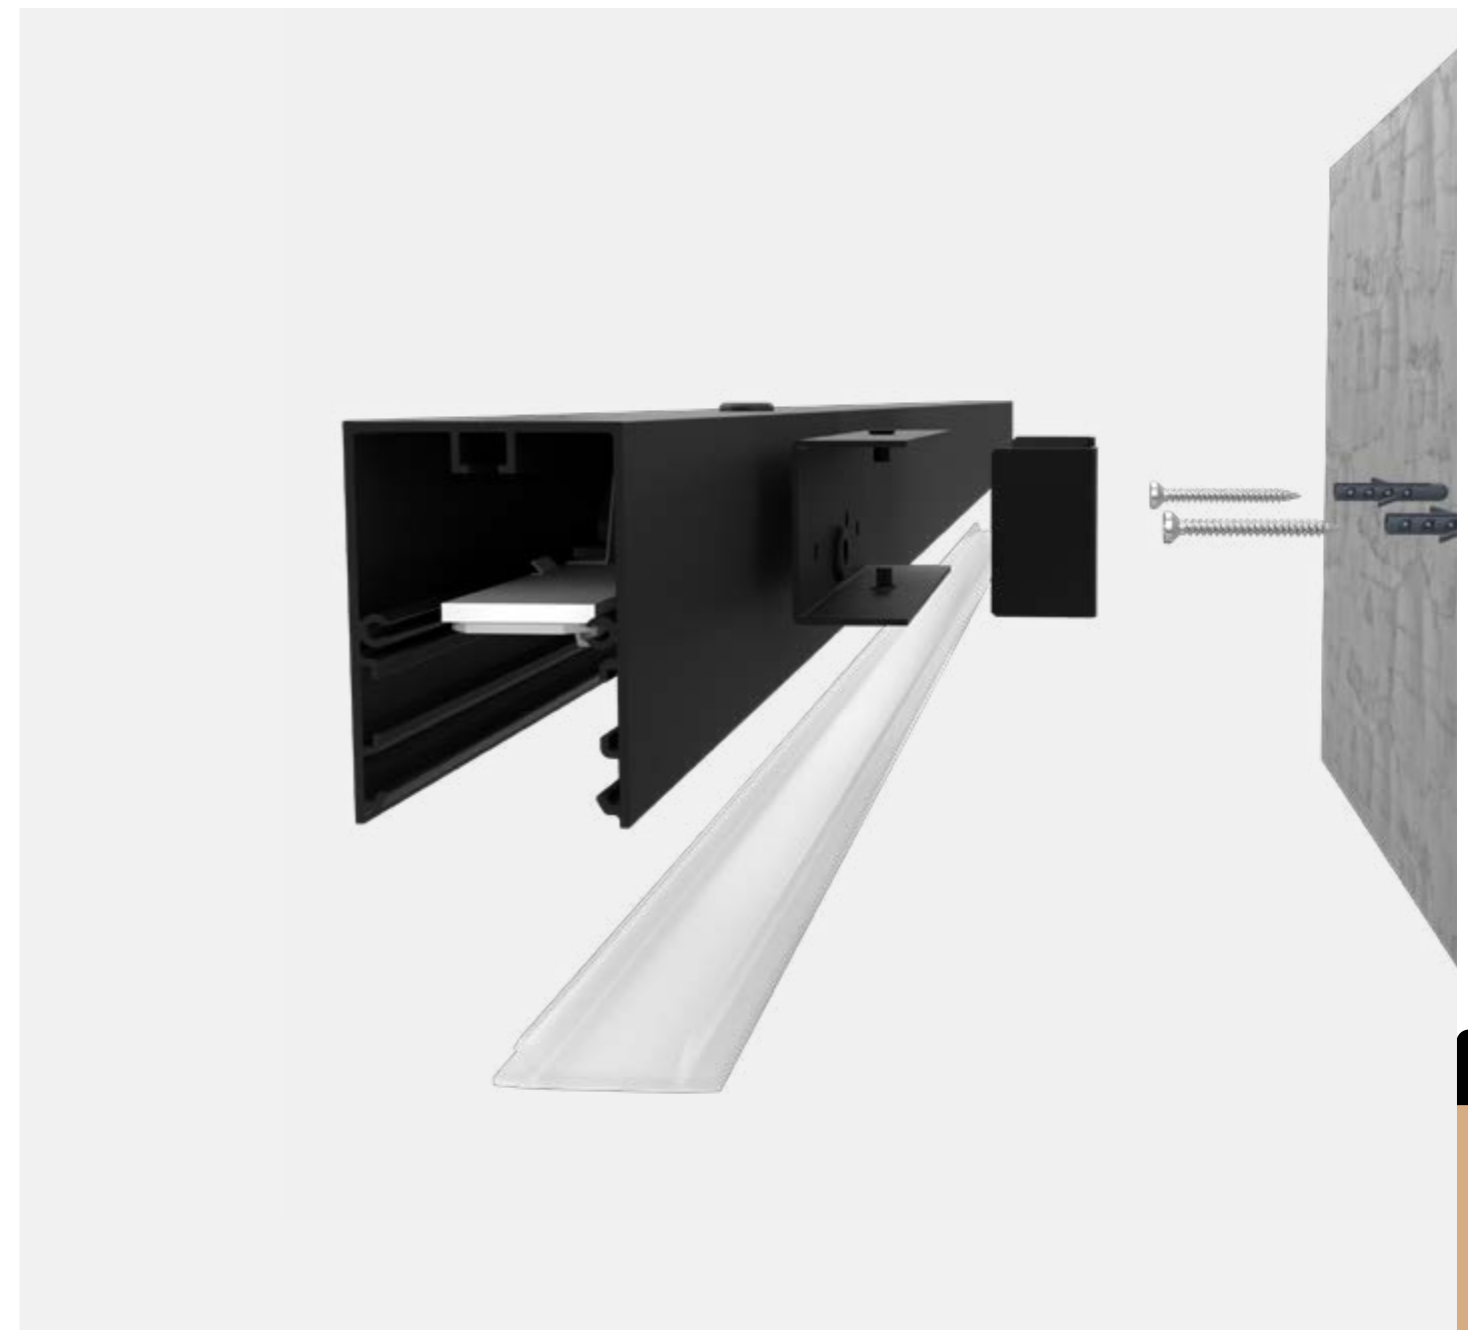

10160.WS
WALL SURFACE


• Select finish



ALBA

REF 10160.WS


PHOTOMETRY

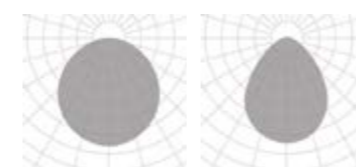

OPAL

MICROPRISMATIC


INCLUDED

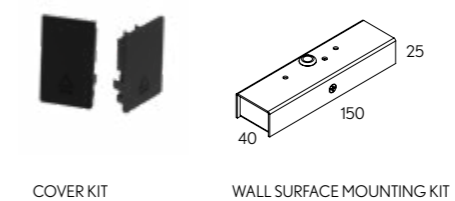

COVER KIT

WALL SURFACE MOUNTING KIT

PROFILE



*1 Tunable White (TW) values correspond to 2700K and 6500K - TW is only available for DALI DT8 dimmable (.DA), CRI 80 (8) 700mA. Los valores del blanco dinámico (TW) corresponden a 2700K y 6500K. -TW solo está disponible con protocolo DALI DT8 (.DA), CRI 80 (8) 700mA.
*2 Down light (direct light) works at 500mA. La luz directa trabaja a 500mA.