



new

## FINISHES

### ● COLORS



## DIMENSIONS

### ◆ PROFILE LENGTHS mm.

843 | 1124 | 1405 | 1686 | 1967 | 2248

## LIGHTING OPTIONS

### ■ DIFFUSERS

OPAL | MICROPRISMATIC

### POWER

STANDARD

### CRI

90

### COLOR TEMPERATURE

2700K | 3000K | 4000K | TW

### ▼ DIMMABLE OPTIONS


DALI | 1.10 | PUSH

### ▲ LIGHT DISTRIBUTION

UP - DOWN

## LUMINAIRE INCLUDES

2 x Suspension cables 3m (each 2m)  
 NON-DIM DOWN: 1 x Feed Hose 3 x 0,75mm<sup>2</sup>  
 DIM DOWN or NON-DIM DOWN-UP: 1 x Feed Hose 5 x 0,75mm<sup>2</sup>  
 DIM DOWN-UP (only): Cabling 2 circuits, 2 x Feed Hose 5 x 0,75mm<sup>2</sup>  
 Diffuser

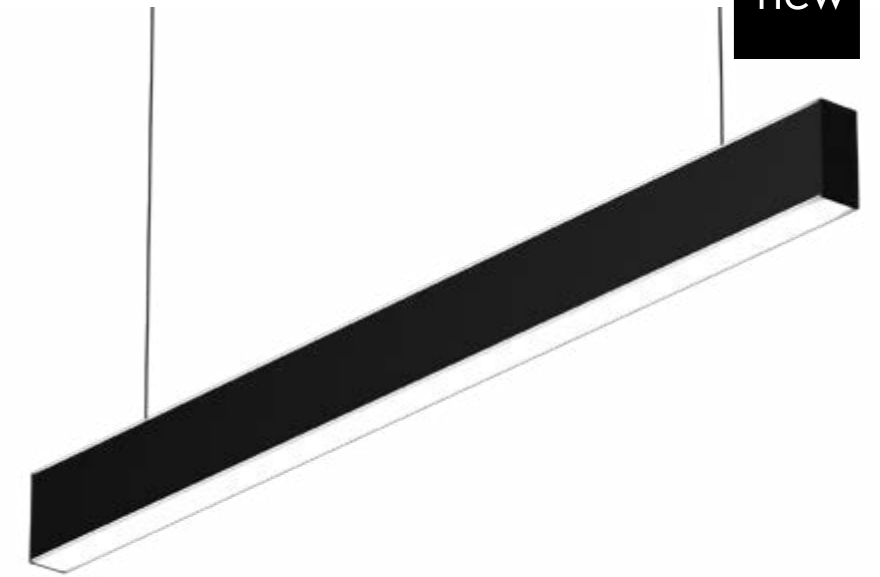

### ON DEMAND

Emergency Lighting\*  
 Motion Detection  
 Custom dimensions  
 Special Color Temperature  
 RGB  
 Thematic LED  
 Wireless Control Options (Casambi)  
 CRI 80  
 HI power

\* Delivered separately  
 (not installed in luminaire).

## INSTALLATIONS



# ALBA DOUBLE


REF 10215.PN

.PN  
PENDANT

10215 ALBA DOUBLE | PN  
Pag. 238

.WS  
WALL SURFACE

10215 ALBA DOUBLE | WS  
Pag. 790

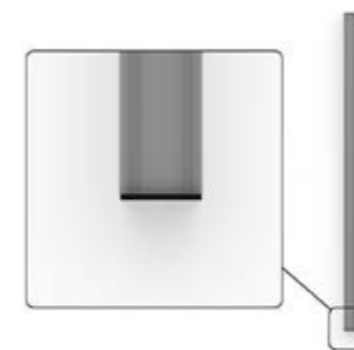

PENDANT

| REF.  | PROFILE LENGTH |      | FINISH | DIFFUSER   | POWER | CRI | DOWNLIGHT *2   LUMEN |      |      |             | WATT |     | UPLIGHT *2   LUMEN |      |      |             | WATT |     | DIMM              |
|-------|----------------|------|--------|------------|-------|-----|----------------------|------|------|-------------|------|-----|--------------------|------|------|-------------|------|-----|-------------------|
|       | MM             | MM   |        |            |       |     | .27                  | .30  | .40  | .TW *1      | K    | TW  | .27                | .30  | .40  | .TW *1      | K    | TW  |                   |
| 10215 | .03            | 843  | ●      | .OP<br>.MP | .ST   | .9  | 2295                 | 2385 | 2475 | 5700-5910   | 18   | 38  | 2295               | 2385 | 2475 | 5700-5910   | 18   | 38  | .DA<br>.PU<br>.D1 |
|       | .04            | 1124 |        |            |       |     | 3060                 | 3180 | 3300 | 7600-7880   | 24   | 51  | 3060               | 3180 | 3300 | 7600-7880   | 24   | 51  |                   |
|       | .05            | 1405 |        |            |       |     | 3825                 | 3975 | 4125 | 9500-9850   | 30   | 64  | 3825               | 3975 | 4125 | 9500-9850   | 30   | 64  |                   |
|       | .06            | 1686 |        |            |       |     | 4590                 | 4770 | 4950 | 11400-11820 | 35   | 76  | 4590               | 4770 | 4950 | 11400-11820 | 35   | 76  |                   |
|       | .07            | 1967 |        |            |       |     | 5355                 | 5565 | 5775 | 13300-13790 | 41   | 89  | 5355               | 5565 | 5775 | 13300-13790 | 41   | 89  |                   |
|       | .08            | 2248 |        |            |       |     | 6120                 | 6360 | 6600 | 15200-15760 | 47   | 102 | 6120               | 6360 | 6600 | 15200-15760 | 47   | 102 |                   |

Reference order | 10215.XX.PN.XX.XX.ST9.XX.XX

## COMPONENTS

| COVER KIT | REF.           | FINISH |
|-----------|----------------|--------|
|           | TF04<br>2x3mm. | ●      |

Reference order | TF04.SR.PN.XX

## JOINTS

| LINEAR JOINT |
|--------------|
|              |
| UR04         |



## OPTIONS (.PN)

| SUSPENSION KIT | REF. | DIMENSION | FINISH |
|----------------|------|-----------|--------|
|                | SC05 | 5M.       | .SA    |
|                | SC07 | 7M.       |        |
|                | SC10 | 10M.      |        |

Reference order | SCXX.SA

| SUSPENSION ROD | REF. | DIMENSIONS | mm   | FINISH |
|----------------|------|------------|------|--------|
|                | SC21 | .60        | 600  | ●      |
|                |      | .80        | 800  |        |
|                |      | .100       | 1000 |        |

Reference order | SC21.XX.XX

Not-included, please select:

| CONNECTION BOX | FINISH |
|----------------|--------|
|                | ●      |
| CB09.12        |        |

Reference order | CB09.12.XX

Total length = Profile length + 40mm + 2x3mm (Cover kit)


Select finishes



# ALBA DOUBLE


REF 10215.PN

## PHOTOMETRY

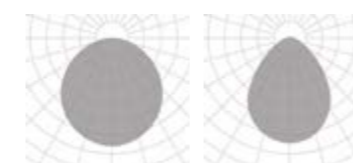


OPAL MICROPRISMATIC

## INCLUDED (.PN)



SC03.SA  
WIRE 3M.

## PROFILE



94  
43

\*1 Tunable White (TW) values correspond to 2700K and 6500K - TW is only available for DALI DT8 dimmable (DA), CRI 80 (8) 700mA. Los valores del blanco dinámico (TW) corresponden a 2700K y 6500K. -TW solo está disponible con protocolo DALI DT8 (DA), CRI 80 (8) 700mA.

\*2 Down light (direct light) and up light (UP) work at 500mA. La luz directa e indirecta (UP) trabaja a 500mA.



## FINISHES

### ● COLORS



## DIMENSIONS

### ◆ LENGTHS mm.

327 | 468 | 608

## LIGHTING OPTIONS

### ■ DIFFUSERS

OPAL | MICROPRISMATIC

### POWER

STANDARD | HIGH

### CRI

90

### COLOR TEMPERATURE

2700K | 3000K | 4000K | TW

### ▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

### ▲ LIGHT DISTRIBUTION

UP - DOWN

## LUMINAIRE INCLUDES

Wall surface mounting kit  
Cover Kit



### ON DEMAND

Emergency Lighting\*  
Motion Detection  
Custom dimensions  
Special Color Temperature  
RGB  
Thematic LED  
Wireless Control Options (Casambi)  
CRI 80  
HI power

\* Delivered separately  
(not installed in luminaire).

.WS

WALL SURFACE


## INSTALLATIONS

.PN  
PENDANT

10215 ALBA DOUBLE | PN  
Pag. 238


.WS  
WALL SURFACE

10215 ALBA DOUBLE | WS  
Pag. 790

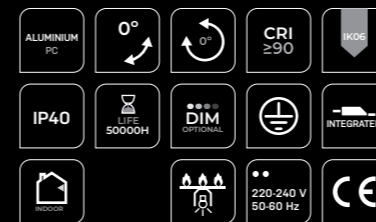

# ALBA DOUBLE

REF 10215.WS

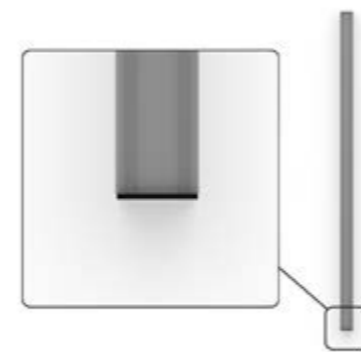

| REF.  | DIMENSION |     | FINISH | DIFFUS-ER  | POWER | CRI | DOWNLIGHT *2   LUMEN |      |      |           | WATT |    | UPLIGHT *2   LUMEN |      |      |           | WATT |    | DIMM              |
|-------|-----------|-----|--------|------------|-------|-----|----------------------|------|------|-----------|------|----|--------------------|------|------|-----------|------|----|-------------------|
|       | MM        | MM  |        |            |       |     | .27                  | .30  | .40  | .TW *1    | K    | TW | .27                | .30  | .40  | .TW *1    | K    | TW |                   |
| 10215 | .01       | 327 | ●      | .OP<br>.MP | .ST   | .9  | 725                  | 795  | 825  | 1900-1970 | 18   | 38 | 725                | 795  | 825  | 1900-1970 | 18   | 38 | .DA<br>.PU<br>.D1 |
|       | .02       | 468 |        |            |       |     | 1088                 | 1193 | 1238 | 2850-2955 | 27   | 57 | 1088               | 1193 | 1238 | 2850-2955 | 27   | 57 |                   |
|       | .03       | 608 |        |            |       |     | 1450                 | 1590 | 1650 | 3800-3940 | 36   | 76 | 1450               | 1590 | 1650 | 3800-3940 | 36   | 76 |                   |

Reference order | 10215.XX.WS.XX.XX.ST9.XX.XX




WALL SURFACE

● Select finish




.WH-WH .BK-BK .GC-GC .BM-BM .BS-BS .BC-BC .CR-CR .CB-CB .GY-GY .MG-MG .VC-VC .YM-YM

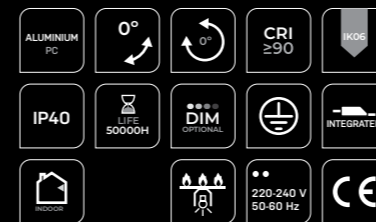

# ALBA DOUBLE

REF 10215.WS


## PHOTOMETRY

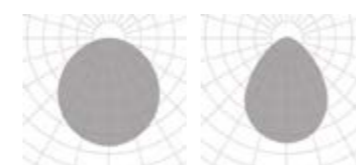

OPAL

MICROPRISMATIC


## INCLUDED

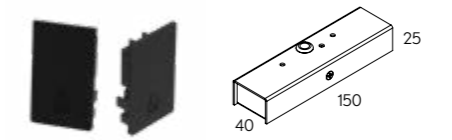

COVER KIT

WALL SURFACE MOUNTING KIT

## PROFILE



43

\*1 Tunable White (TW) values correspond to 2700K and 6500K - TW is only available for DALI DT8 dimmable (DA), CRI 80 (8) 700mA. Los valores del blanco dinámico (TW) corresponden a 2700K y 6500K. - TW solo está disponible con protocolo DALI DT8 (DA), CRI 80 (8) 700mA.

\*2 Down light (direct light) and up light (UP) work at 500mA. La luz directa e indirecta (UP) trabaja a 500mA.