



FINISHES

● COLORS



DIMENSIONS

◆ PROFILE LENGTHS mm.

843 | 1124 | 1405 | 1686 | 1967 | 2248

LIGHTING OPTIONS

■ DIFFUSERS

OPAL | MICROPRISMATIC

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K | TW

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN | UP-DOWN


LUMINAIRE INCLUDES

.PN

2 x Suspension cables 3m (each 2m)
 NON-DIM DOWN or DIM DOWN: 1 x Feed Hose 3 x 0,75mm²
 NON-DIM DOWN-UP or DIM DOWN-UP: 1 x Feed Hose 5 x 0,75mm²
 Diffuser

.SR

Surface mounting kit

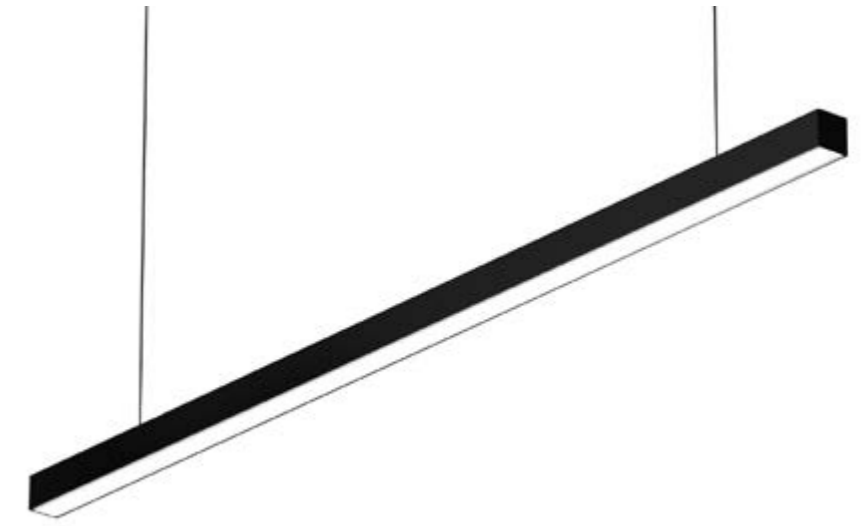

ON DEMAND

Emergency Lighting*
 Motion Detection
 Custom dimensions
 Special Color Temperature
 RGB
 Thematic LED
 Wireless Control Options (Casambi)
 CRI 80



* Delivered separately
 (not installed in luminaire).

INSTALLATIONS

.PN
PENDANT

10211 ALBA MINI | PN
Pag. 226

.SR
SURFACE

10211 ALBA MINI | SR
Pag. 226

.RF
RECESSED FRAME

10211 ALBA MINI | RF
Pag. 440


.TR
TRIMLESS

10211 ALBA MINI | TR
Pag. 640



ALBA MINI

REF 10211.PN | 10211.SR

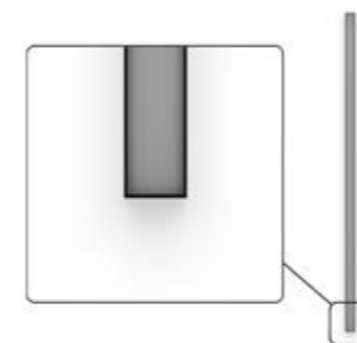

REF.	PROFILE LENGTH		FINISH	DIFFUSER	POWER	CRI	DOWNLIGHT *3 LUMEN				WATT		UPLIGHT ▲.UP *2 LUMEN			WATT		DIMM
	MM	MM					.27	.30	.40	.TW *1	K	TW	.27	.30	.40	K	K	
10211	.03	843	●	.OP .MP	.ST	.9	2295	2385	2475	5700-5910	18	38	265	274	349	4	.DA .PU .D1	
	.04	1124					3060	3180	3300	7600-7880	24	51	397	411	522	6		
	.05	1405					3825	3975	4125	9500-9850	30	64	259	548	696	8		
	.06	1686					4590	4770	4950	11400-11820	35	76	661	685	870	10		
	.07	1967					5355	5565	5775	13300-13790	41	89	793	822	1044	12		
	.08	2248					6120	6360	6600	15200-15760	47	102	925	958	1218	14		

REF.	PROFILE LENGTH		FINISH	DIFFUSER	POWER	CRI	DOWNLIGHT *3 LUMEN				WATT		UPLIGHT ▲.UP *2 LUMEN			WATT		DIMM
	MM	MM					.27	.30	.40			.27	.30	.40	K	K		
10211	.03	843	●	.OP .MP	.HI	.9	4590	4767	4956	35	568	587	747	8	.DA .PU .D1			
	.04	1124					6120	6356	6608	47	851	880	1119	13				
	.05	1405					7650	7945	8260	59	1134	1173	1492	17				
	.06	1686					9180	9534	9912	71	1417	1466	1864	21				
	.07	1967					10710	11123	11564	83	1701	1760	2237	25				
	.08	2248					12240	12712	13216	94	1984	2053	2610	30				

Reference order | 10211.XX | .SR | .PN | .XX.XX.XX.9.XX.XX.XX

Total length = Profile length + 25mm + 2x2mm (Cover kit)

Linear Joint Total length = Profile length + 25mm + [2x2mm (Cover kit)] + [Nº of UR03 x 8]

Joints, other than Linear joint, require a technical drawing

● Select finishes



COMPONENTS

COVER KIT	REF.	FINISH
	TF03	●

Reference order | TF03 | .SR | .PN | .XX

BOXES (.PN) Not-included, please select:

CONNECTION BOX	DRIVER BOX NON-DIMM	DRIVER BOX DIMMABLE	FINISH
			●
CB09.12	CB09.32	CB09.40	

Reference order | CB09.XX.XX

JOINTS

LINEAR JOINT	ANGLE JOINT	T-JOINT	CROSS JOINT	WALL-CEILING JOINT	FINISH
					●
UR03	UL03	UT03	UC03	UV03	

Reference order | XX03 | .SR | .PN | .XX

OPTIONS (.PN)

SUSPENSION KIT	REF.	DIMENSION	FINISH
	SC05	5M.	.SA
	SC07	7M.	
	SC10	10M.	

Reference order | SCXX.SA

SUSPENSION ROD	REF.	DIMENSIONS	mm	FINISH
	SC21	.60	600	●
		.80	800	
		.100	1000	


Reference order | SC21.XX.XX



ALBA MINI


REF 10211.PN | 10211.SR

PHOTOMETRY

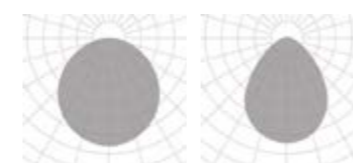


OPAL MICROPRISMATIC

INCLUDED (.PN)



SC03.SA WIRE 3M.

PROFILE



36 34


*1 Tunable White (TW) values correspond to 2700K and 6500K - TW is only available for DALI DT8 dimmable (DA), CRI 80 (8) 700mA. Los valores del blanco dinámico (TW) corresponden a 2700K y 6500K. -TW solo está disponible con protocolo DALI DT8 (DA), CRI 80 (8) 700mA.

*2 Uplight (UP) is only available for ON-OFF and DALI dimmable (DA) options, both require 24VdC and remote driver with connection box CB0912. La luz indirecta está solo disponible para versiones on-off y regulación DALI (DA), ambas requieren 24Vd y driver en remoto con la caja de conexión CB0912.

*3 Down light (direct light) works at 500mA. La luz directa trabaja a 500mA.

Some product variations require an IP Box, seek advice from our technical team. Algunas variaciones del producto requieren de una IP Box, consulte con nuestro equipo técnico

PENDANT | SURFACE

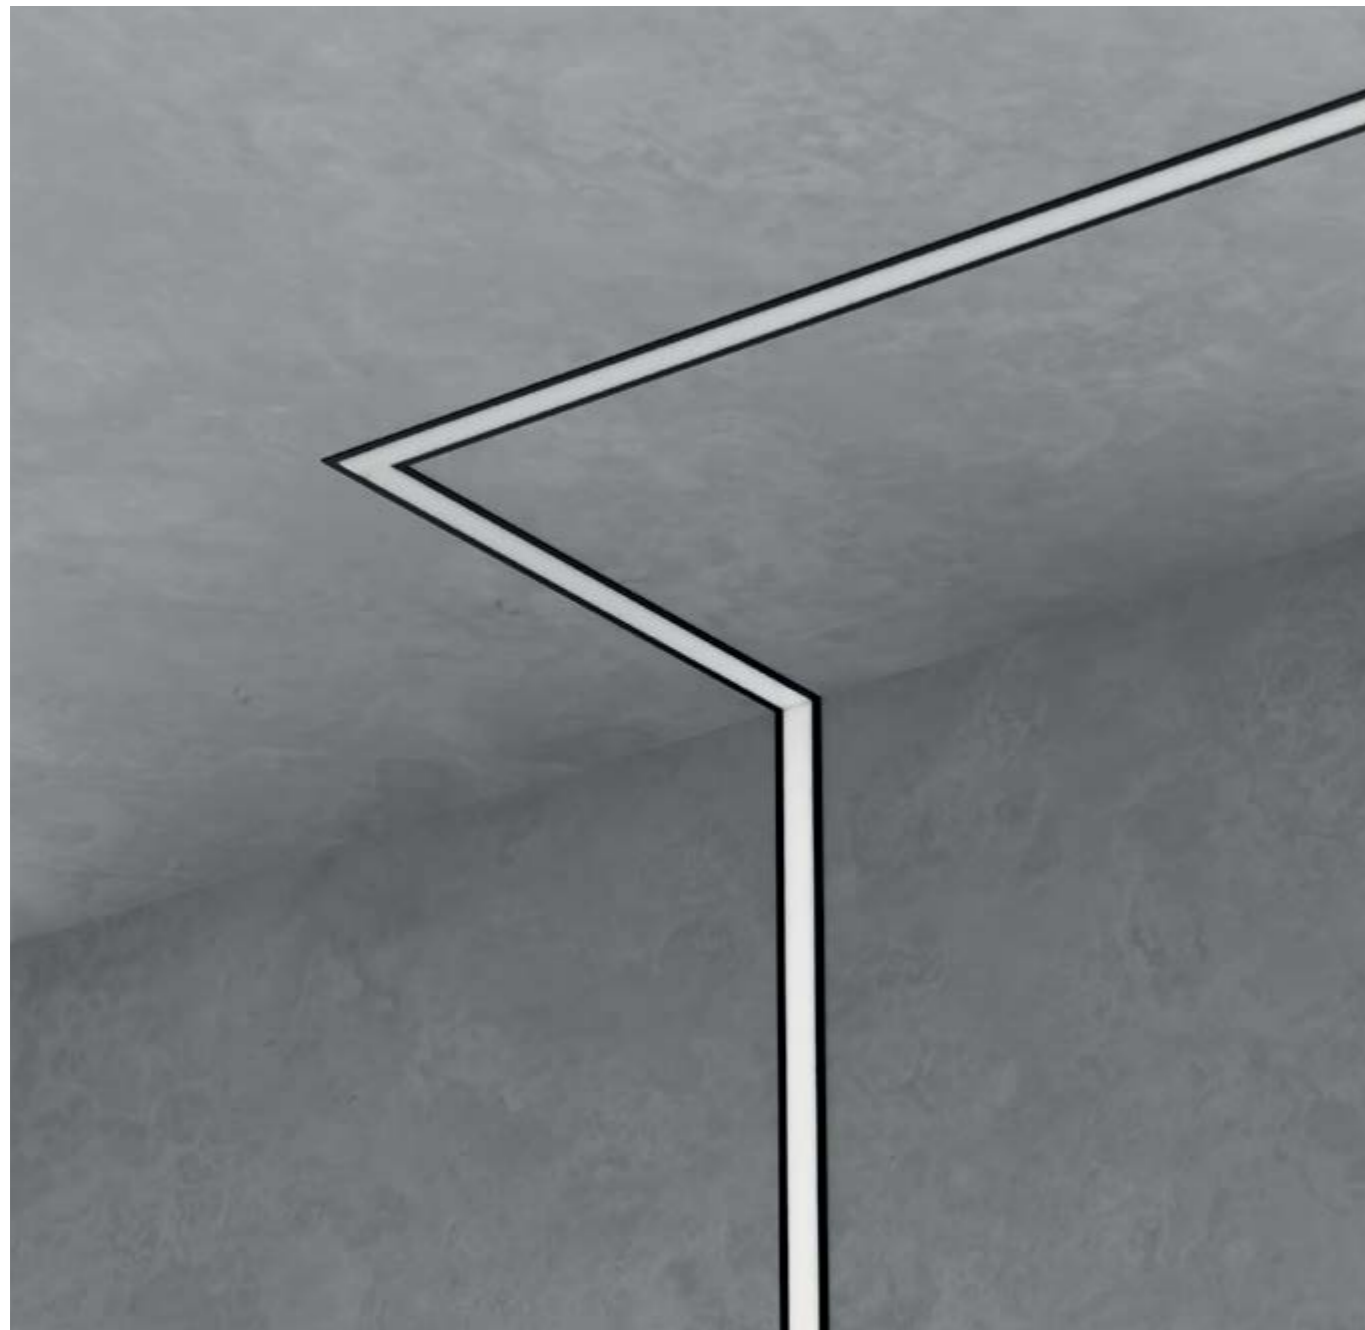

FINISHES

● COLORS



DIMENSIONS

◆ PROFILE LENGTHS mm.

843 | 1124 | 1405 | 1686 | 1967 | 2248

LIGHTING OPTIONS

■ DIFFUSERS

OPAL | MICROPRISMATIC

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K | TW

▼ DIMMABLE OPTIONS



DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

LUMINAIRE INCLUDES

Recessed with frame mounting kit

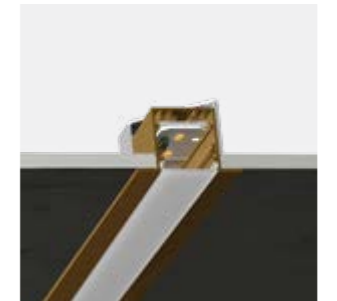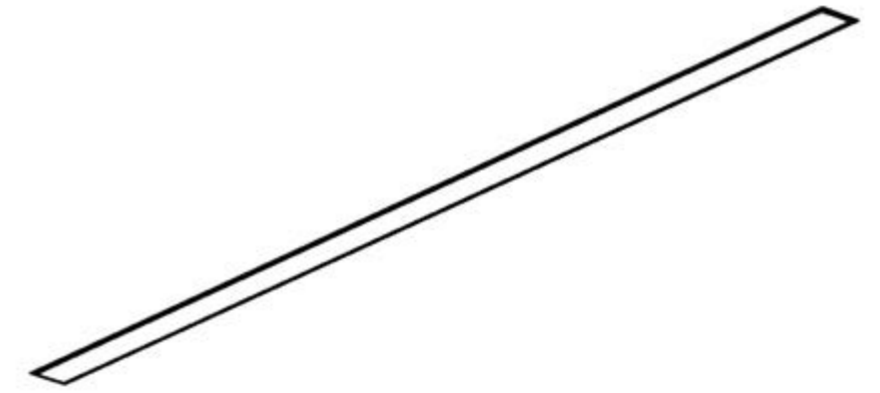

ON DEMAND

Emergency Lighting*
Motion Detection
Well-Certified LED Boards
Taylor your own design
Special Color Temperature
RGB
Thematic LED
Wireless Control Options (Casambi)
CRI 80

* Delivered separately
(not installed in luminaire).



INSTALLATIONS

.PN
PENDANT

-10211 ALBA MINI | PN
Pag. 226

.SR
SURFACE

-10211 ALBA MINI | SR
Pag. 226

.RF
RECESSED FRAME

-10211 ALBA MINI | RF
Pag. 440


.TR
TRIMLESS

-10211 ALBA MINI | TR
Pag. 640



ALBA MINI

REF 10211.RF

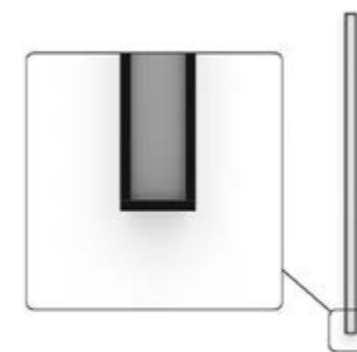

REF.	PROFILE LENGTH		FINISH	DIFFUSER	POWER	CRI	DOWNLIGHT LUMEN				WATT		DIMM
	MM	MM					.27	.30	.40	.TW*2	K	TW	
10211	.03	843	●	.OP .MP	.ST	.9	2295	2385	2475	5700-5910	18	38	.DA .PU .D1
	.04	1124					3060	3180	3300	7600-7880	24	51	
	.05	1405					3825	3975	4125	9500-9850	30	64	
	.06	1686					4590	4770	4950	11400-11820	35	76	
	.07	1967					5355	5565	5775	13300-13790	41	89	
	.08	2248					6120	6360	6600	15200-15760	47	102	

REF.	PROFILE LENGTH		FINISH	DIFFUSER	POWER	CRI	DOWNLIGHT LUMEN			WATT	DIMM
	MM	MM					.27	.30	.40		
10211	.03	843	●	.OP .MP	.HI	.9	4590	4767	4956	35	.DA .PU .D1
	.04	1124					6120	6356	6608	47	
	.05	1405					7650	7945	8260	59	
	.06	1686					9180	9534	9912	71	
	.07	1967					10710	11123	11564	83	
	.08	2248					12240	12712	13216	94	

Reference order **10211.XX.RF.XX.XX.XX.9.XX.XX**

Total length = Profile length + 25mm + 2x8mm (Cover kit)

Linear Joint Total length = Profile length + 25mm + [2 x 8mm (Cover kit)] + [N° of URO3 x 8]

Joints, other than Linear joint, require a technical drawing

(Total length - 8mm) x 38mm

70mm

Select finish



COMPONENTS

COVER KIT	REF.	FINISH
	TF03	●

Reference order **TF03.RF.XX**

JOINTS

LINEAR JOINT	ANGLE JOINT	T-JOINT	CROSS JOINT	WALL-CEILING JOINT	FINISH
					●
URO3	UL03	UT03	UC03	UV03	


Reference order **XX03.RF.XX**

ALBA MINI

REF 10211.RF




PHOTOMETRY

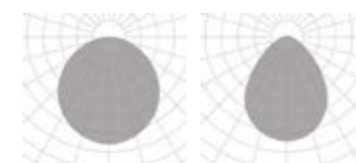


OPAL MICROPRISMATIC

INCLUDED



RF INSTALLATION KIT

PROFILE



46

*1 Tunable White (TW) values correspond to 2700K and 6500K - TW is only available for DALI DT8 dimmable (.DA), CRI 80 (8) 700mA. Los valores del blanco dinámico (TW) corresponden a 2700K y 6500K. -TW solo está disponible con protocolo DALI DT8 (.DA), CRI 80 (8) 700mA.
*2 Down light (direct light) works at 500mA. La luz directa trabaja a 500mA.

RECESSED FRAME



FINISHES

● COLORS



DIMENSIONS

◆ PROFILE LENGTHS mm.

843 | 1124 | 1405 | 1686 | 1967 | 2248

LIGHTING OPTIONS

■ DIFFUSERS

OPAL | MICROPRISMATIC

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K | TW

▼ DIMMABLE OPTIONS



DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

LUMINAIRE INCLUDES

Trimless mounting kit

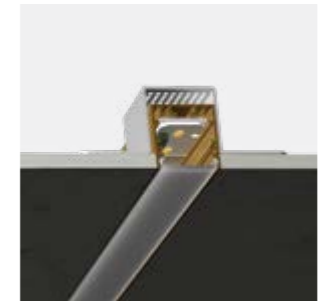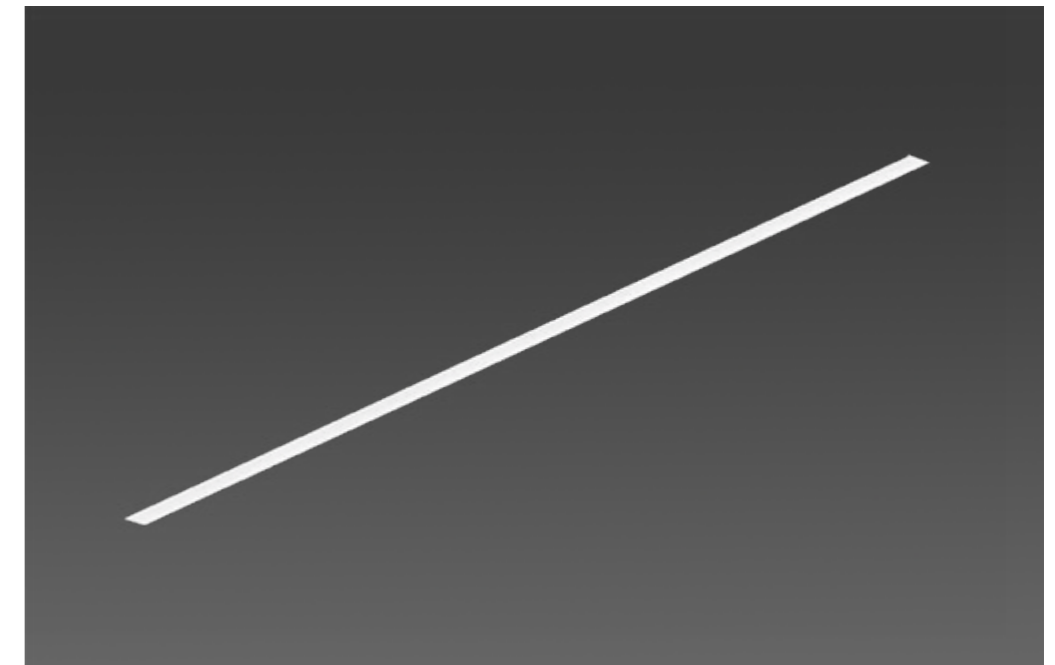

ON DEMAND

Emergency Lighting*
Motion Detection
Custom dimensions
Special Color Temperature
RGB
Thematic LED
Wireless Control Options (Casambi)
CRI 80

* Delivered separately
(not installed in luminaire).

INSTALLATIONS

.PN
PENDANT

·10211 ALBA MINI|PN
Pag. 226

.SR
SURFACE

·10211 ALBA MINI|SR
Pag. 226

.RF
RECESSED FRAME

·10211 ALBA MINI|RF
Pag. 440



.TR
TRIMLESS

·10211 ALBA MINI|TR
Pag. 640



ALBA MINI

REF 10211.TR

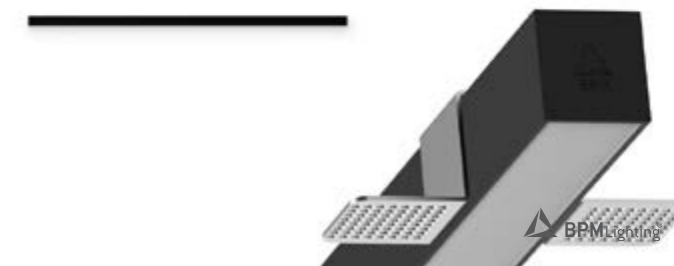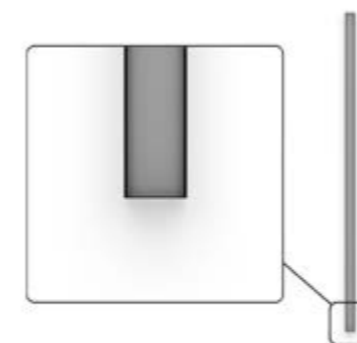

REF.	PROFILE LENGTH		FINISH	DIFFUSER	POWER	CRI	DOWNLIGHT LUMEN				WATT		DIMM
	MM	MM					.27	.30	.40	.TW*2	K	TW	
10211	.03	843	●	.OP .MP	.ST	.9	2295	2385	2475	5700-5910	18	38	.DA .PU .D1
	.04	1124					3060	3180	3300	7600-7880	24	51	
	.05	1405					3825	3975	4125	9500-9850	30	64	
	.06	1686					4590	4770	4950	11400-11820	35	76	
	.07	1967					5355	5565	5775	13300-13790	41	89	
	.08	2248					6120	6360	6600	15200-15760	47	102	

REF.	PROFILE LENGTH		FINISH	DIFFUSER	POWER	CRI	DOWNLIGHT LUMEN			WATT		DIMM
	MM	MM					.27	.30	.40	K	TW	
10211	.03	843	●	.OP .MP	.HI	.9	4590	4767	4956	35		.DA .PU .D1
	.04	1124					6120	6356	6608	47		
	.05	1405					7650	7945	8260	59		
	.06	1686					9180	9534	9912	71		
	.07	1967					10710	11123	11564	83		
	.08	2248					12240	12712	13216	94		

Reference order | 10211.XX.TR.XX.XX.XX.XX.XX.XX.XX

Total length = Profile length + 25mm + 2x2mm (Cover kit)

Linear Joint Total length = Profile length + 25mm + [2x2mm (Cover kit)] + [N° of UR03 x 8]

Joints, other than Linear joint, require a technical drawing

(Total length + 2mm) x 35mm

70mm

Select finish



COMPONENTS

COVER KIT	REF.	FINISH
	TF03	●
	2x2mm.	

Reference order | TF03.TR.XX

JOINTS


LINEAR JOINT	ANGLE JOINT	T-JOINT	CROSS JOINT	WALL-CEILING JOINT	FINISH
					●
UR03	UL03	UT03	UC03	UV03	

Reference order | XX03.TR.XX

ALBA MINI

REF 10211.TR


PHOTOMETRY

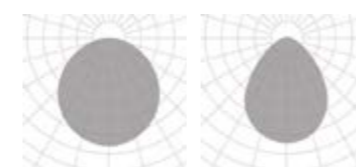

OPAL


MICROPRISMATIC

INCLUDED



TR INSTALLATION KIT

PROFILE



*1 Tunable White (TW) values correspond to 2700K and 6500K - TW is only available for DALI DT8 dimmable (.DA), CRI 80 (.8) 700mA. Los valores del blanco dinámico (TW) corresponden a 2700K y 6500K. -TW solo está disponible con protocolo DALI DT8 (.DA), CRI 80 (.8) 700mA.

*2 Down light (direct light) works at 500mA. La luz directa trabaja a 500mA.