



FINISHES

• COLORS



DIMENSIONS

• PROFILE LENGTHS mm.

843 | 1124 | 1405 | 1686 | 1967 | 2248

LIGHTING OPTIONS

■ DIFFUSERS

OPAL | MICROPRISMATIC

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K | TW

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN | UP-DOWN


LUMINAIRE INCLUDES

.PN

2 x Suspension cables 3m (each 2m)
 NON-DIM DOWN: 1 x Feed Hose 3 x 0,75mm²
 DIM DOWN or NON-DIM DOWN-UP: 1 x Feed Hose 5 x 0,75mm²
 DIM DOWN-UP (only): 1 x Feed Hose 5 x 0,75mm²
 Diffuser

.SR

Surface mounting kit

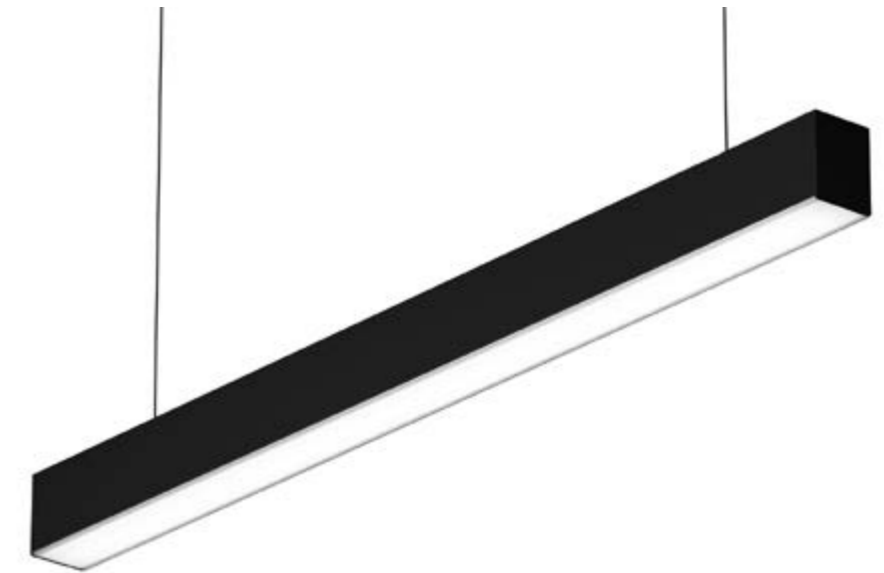

ON DEMAND

Emergency Lighting*
 Motion Detection
 Custom dimensions
 Special Color Temperature
 RGB
 Thematic LED
 Wireless Control Options (Casambi)
 CRI 80

* Delivered separately
 (not installed in luminaire).

INSTALLATIONS



ALBA PLUS

REF 10178.PN | 10178.SR

.PN
PENDANT

·10178 ALBA PLUS|PN
Pag. 246

.TK
TRACK

·10178 ALBA PLUS|TK
Pag. 764

.SR
SURFACE



·10178 ALBA PLUS|SR
Pag. 246

.RF
RECESSED FRAME

·10178 ALBA PLUS|RF
Pag. 452

.TR
TRIMLESS

·10178 ALBA PLUS|TR
Pag. 652

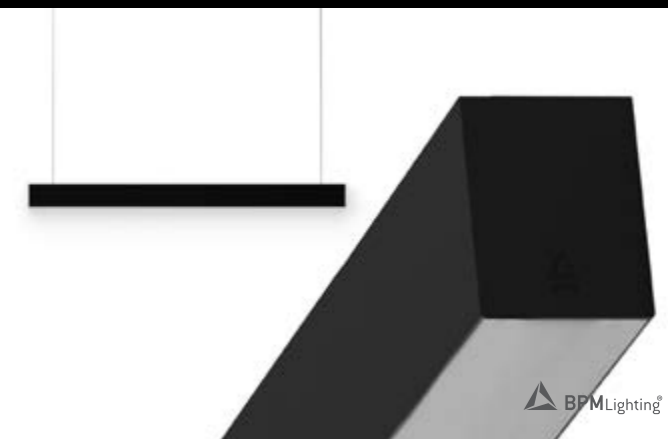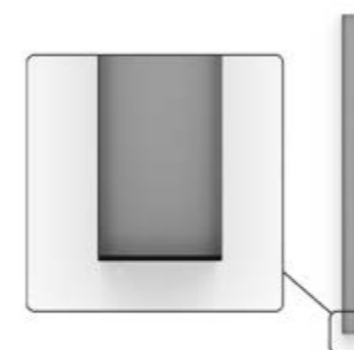

REF.	PROFILE LENGTH		FINISH	DIFFUSER	POWER	CRI	DOWNLIGHT *3 LUMEN				WATT		UPLIGHT ▲.UP *2 LUMEN			WATT		DIMM
	MM	MM					.27	.30	.40	.TW *1	K	TW	.27	.30	.40	K	K	
10178	.03	843	●	.OP .MP	.ST	.9	2295	2385	2475	5700-5910	18	38	265	274	349	4	.DA .PU .D1	
	.04	1124					3060	3180	3300	7600-7880	24	51	397	411	522	6		
	.05	1405					3825	3975	4125	9500-9850	30	64	259	548	696	8		
	.06	1686					4590	4770	4950	11400-11820	35	76	661	685	870	10		
	.07	1967					5355	5565	5775	13300-13790	41	89	793	822	1044	12		
	.08	2248					6120	6360	6600	15200-15760	47	102	925	958	1218	14		

REF.	PROFILE LENGTH		FINISH	DIFFUSER	POWER	CRI	DOWNLIGHT *3 LUMEN			UPLIGHT ▲.UP *2 LUMEN			WATT		DIMM
	MM	MM					.27	.30	.40	.27	.30	.40	K	K	
10178	.03	843	●	.OP .MP	.HI	.9	4590	4767	4956	35	568	587	747	8	.DA .PU .D1
	.04	1124					6120	6356	6608	47	851	880	1119	13	
	.05	1405					7650	7945	8260	59	1134	1173	1492	17	
	.06	1686					9180	9534	9912	71	1417	1466	1864	21	
	.07	1967					10710	11123	11564	83	1701	1760	2237	25	
	.08	2248					12240	12712	13216	94	1984	2053	2610	30	

Reference order | 10178.XX | .SR | .PN | .XX.XX.XX.9.XX.XX.XX

Total length = Profile length + 20mm + 2x3mm (Cover kit)

● Select finishes



COMPONENTS

COVER KIT	REF.	FINISH
	TF01 2x3mm.	●

Reference order | TF01 | .SR | .PN | .XX

REDUGER	REF.	POWER
	ACC.RG	.ST .HI

Reference order | ACC.RG.XX

JOINTS

LINEAR JOINT	ANGLE JOINT	T-JOINT	CROSS JOINT	WALL-CEILING JOINT	FINISH
					●
UR01	UL01	UT01	UC01	UV01	

Joints, other than Linear joint, require a technical drawing

Reference order | XX01 | .SR | .PN | .XX

OPTIONS (.PN)

SUSPENSION KIT	REF.	DIMENSION	FINISH
	SC05	5M.	.SA
	SC07	7M.	
	SC10	10M.	

Reference order | SCXX.SA

SUSPENSION ROD	REF.	DIMENSIONS	mm	FINISH
	SC21	.60	600	●
		.80	800	
		.100	1000	

Reference order | SC21.XX.XX

Not-included, please select:


CONNECTION BOX	FINISH
	●
CB09.12	

Reference order | CB09.12.XX

ALBA PLUS


REF 10178.PN | 10178.SR

PHOTOMETRY

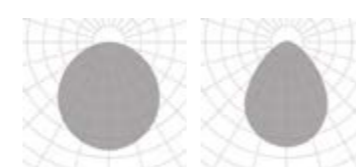


OPAL MICROPRISMATIC

INCLUDED (.PN)



SC03.SA WIRE 3M.

PROFILE



65

*1 Tunable White (TW) values correspond to 2700K and 6500K - TW is only available for DALI DT8 dimmable (DA), CRI 80 (8) 700mA. Los valores del blanco dinámico (TW) corresponden a 2700K y 6500K. -TW solo está disponible con protocolo DALI DT8 (DA), CRI 80 (8) 700mA.

*2 Uplight (UP) is only available for ON-OFF and DALI dimmable (DA) options, both in 24VdC. La luz indirecta está solo disponible para versiones on-off y regulación DALI (DA), ambas en 24VdC.

*3 Down light (direct light) works at 500mA. La luz directa trabaja a 500mA.



FINISHES

● COLORS



DIMENSIONS

◆ PROFILE LENGTHS mm.

843 | 1124 | 1405 | 1686 | 1967 | 2248

LIGHTING OPTIONS

■ DIFFUSERS

OPAL | MICROPRISMATIC

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K | TW

▼ DIMMABLE OPTIONS



DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

LUMINAIRE INCLUDES

Recessed with frame mounting kit

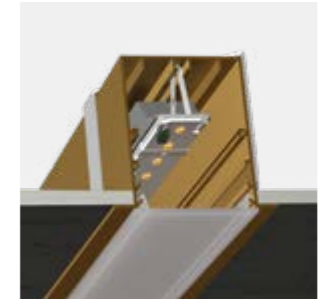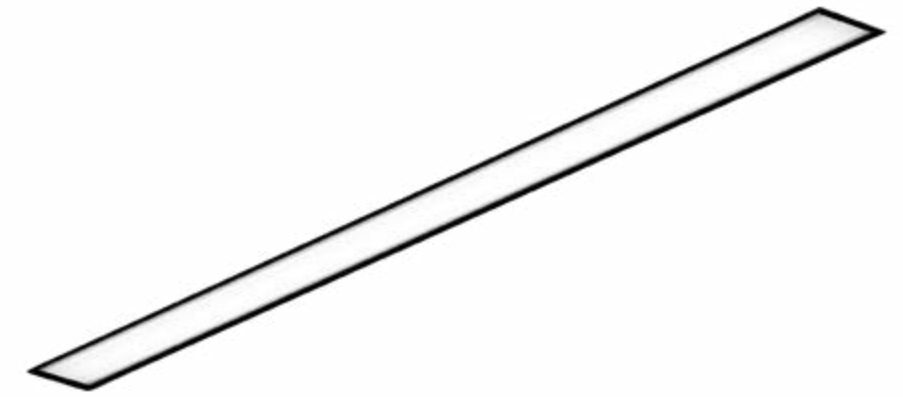

ON DEMAND

Emergency Lighting*
Motion Detection
Well-Certified LED Boards
Taylor your own design
Special Color Temperature
RGB
Thematic LED
Wireless Control Options (Casambi)
CRI 80

* Delivered separately
(not installed in luminaire).

.RF
RECESSED FRAME

INSTALLATIONS



ALBA PLUS

REF 10178.RF

.PN
PENDANT

·10178 ALBA PLUS|PN
Pag. 246

.TK
TRACK

·10178 ALBA PLUS|TK
Pag. 764

.SR
SURFACE


·10178 ALBA PLUS|SR
Pag. 246

.RF
RECESSED FRAME

·10178 ALBA PLUS|RF
Pag. 452

.TR
TRIMLESS

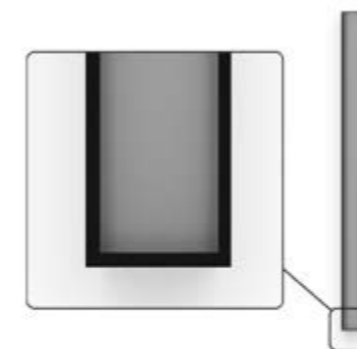


·10178 ALBA PLUS|TR
Pag. 652



REF.	PROFILE LENGTH		FINISH	DIFFUSER	POWER	CRI	DOWNLIGHT LUMEN				WATT		DIMM
	MM	MM					.27	.30	.40	.TW*2	K	TW	
10178	.03	843	●	.OP .MP	.ST	.9	2295	2385	2475	5700-8520	18	38	.DA .PU .D1
	.04	1124					3060	3180	3300	7600-11360	24	51	
	.05	1405					3825	3975	4125	9500-14200	30	64	
	.06	1686					4590	4770	4950	11400-17040	35	76	
	.07	1967					5355	5565	5775	13300-19880	41	89	
	.08	2248					6120	6360	6600	15200-22720	47	102	

REF.	PROFILE LENGTH		FINISH	DIFFUSER	POWER	CRI	DOWNLIGHT LUMEN			WATT	DIMM
	MM	MM					.27	.30	.40		
10178	.03	843	●	.OP .MP	.HI	.9	4590	4767	4956	35	.DA .PU .D1
	.04	1124					6120	6356	6608	47	
	.05	1405					7650	7945	8260	59	
	.06	1686					9180	9534	9912	71	
	.07	1967					10710	11123	11564	83	
	.08	2248					12240	12712	13216	94	


Reference order | 10178.XX.RF.XX.XX.XX9.XX.XX

 Total length = Profile length + 10mm + 2x8mm (Cover kit)
 (Total length - 8mm) x 73mm
 120mm


● Select finish



COMPONENTS






COVER KIT	REF.	FINISH
	TF01 2x8mm.	●

Reference order | TF01.RF.XX

REDUGER	REF.	POWER
	ACC.RG	.ST .HI

Reference order | ACC.RG.XX

JOINTS

LINEAR JOINT	ANGLE JOINT	T-JOINT	CROSS JOINT	WALL-CEILING JOINT	FINISH
					●
UR01	UL01	UT01	UC01	UV01	


Joints, other than Linear joint, require a technical drawing

Reference order | XX01.RF.XX

ALBA PLUS

REF 10178.RF

PHOTOMETRY

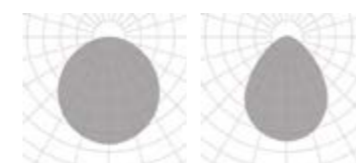

OPAL


MICROPRISMATIC

INCLUDED



RF INSTALLATION KIT

PROFILE



*1 Tunable White (TW) values correspond to 2700K and 6500K - TW is only available for DALI DT8 dimmable (.DA), CRI 80 (.8) 700mA. Los valores del blanco dinámico (TW) corresponden a 2700K y 6500K. -TW solo está disponible con protocolo DALI DT8 (.DA), CRI 80 (.8) 700mA.
 *2 Down light (direct light) works at 500mA. La luz directa trabaja a 500mA.



FINISHES

● COLORS



DIMENSIONS

◆ PROFILE LENGTHS mm.

843 | 1124 | 1405 | 1686 | 1967 | 2248

LIGHTING OPTIONS

■ DIFFUSERS

OPAL | MICROPRISMATIC

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K | TW

▼ DIMMABLE OPTIONS



DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

LUMINAIRE INCLUDES

Trimless mounting kit

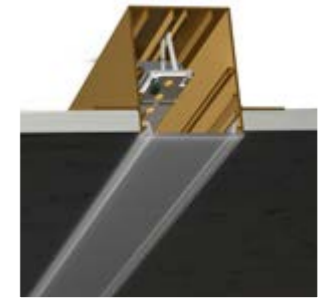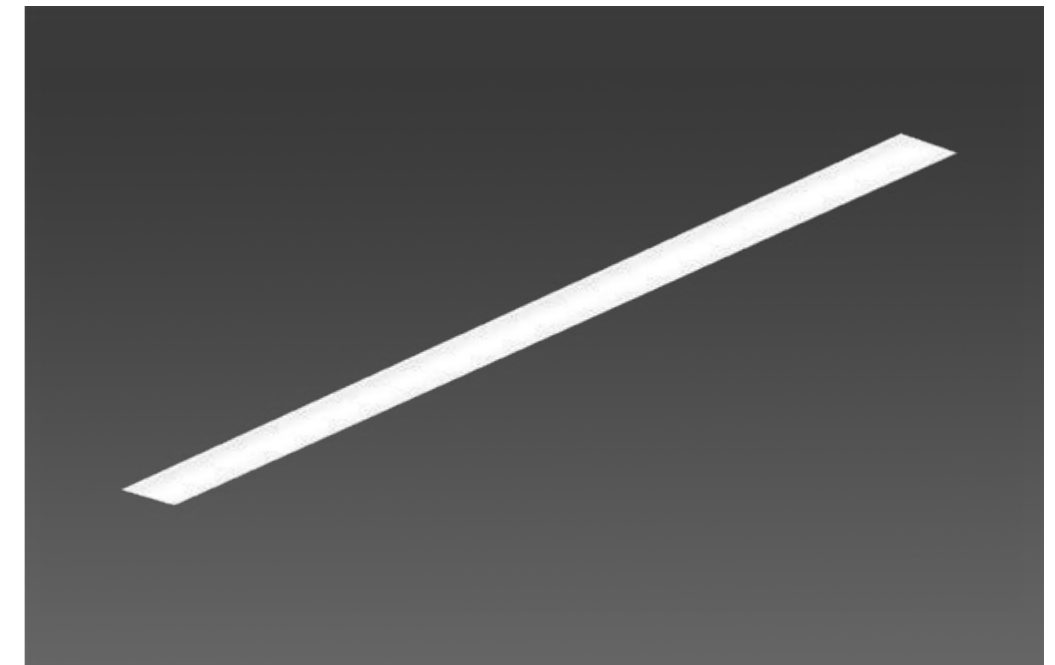

ON DEMAND

Emergency Lighting*
Motion Detection
Custom dimensions
Special Color Temperature
RGB
Thematic LED
Wireless Control Options (Casambi)
CRI 80

* Delivered separately
(not installed in luminaire).

INSTALLATIONS

.PN
PENDANT

·10178 ALBA PLUS|PN
Pag. 246

.TK
TRACK

·10178 ALBA PLUS|TK
Pag. 764

.SR
SURFACE

·10178 ALBA PLUS|SR
Pag. 246

.RF
RECESSED FRAME

·10178 ALBA PLUS|RF
Pag. 452



.TR
TRIMLESS

·10178 ALBA PLUS|TR
Pag. 652



ALBA PLUS

REF 10178.TR

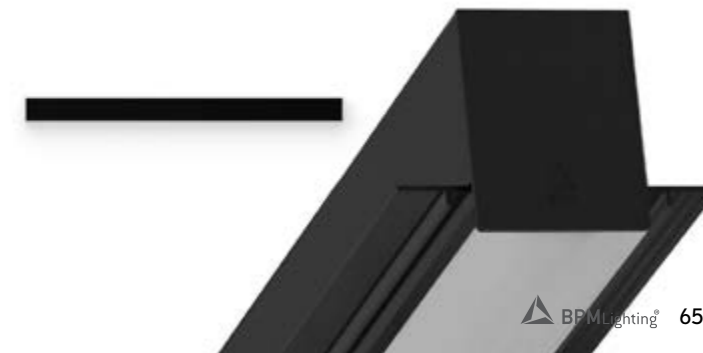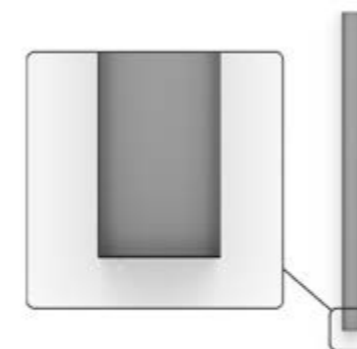




TRIMLESS

.TR

REF.	PROFILE LENGTH		FINISH	DIFFUSER	POWER	CRI	DOWNLIGHT LUMEN				WATT		DIMM
	MM	MM					.27	.30	.40	.TW*2	K	TW	
10178	.03	843	●	.OP .MP	.ST	.9	2295	2385	2475	5700-8520	18	38	.DA .PU .D1
	.04	1124					3060	3180	3300	7600-11360	24	51	
	.05	1405					3825	3975	4125	9500-14200	30	64	
	.06	1686					4590	4770	4950	11400-17040	35	76	
	.07	1967					5355	5565	5775	13300-19880	41	89	
	.08	2248					6120	6360	6600	15200-22720	47	102	

REF.	PROFILE LENGTH		FINISH	DIFFUSER	POWER	CRI	DOWNLIGHT LUMEN			WATT		DIMM
	MM	MM					.27	.30	.40	K	TW	
10178	.03	843	●	.OP .MP	.HI	.9	4590	4767	4956	35		.DA .PU .D1
	.04	1124					6120	6356	6608	47		
	.05	1405					7650	7945	8260	59		
	.06	1686					9180	9534	9912	71		
	.07	1967					10710	11123	11564	83		
	.08	2248					12240	12712	13216	94		


Reference order | 10178.XX.TR.XX.XX.XX.XX.XX.XX

 Total length = Profile length + 10mm + 2x1mm (Cover kit)
 (Total length + 2mm) x 85mm
 115mm


● Select finish



COMPONENTS






COVER KIT	REF.	FINISH
	TF01 2x1mm.	●

Reference order | TF01.TR.XX

REDUGER	REF.	POWER
	ACC.RG	.ST .HI

Reference order | ACC.RG.XX

JOINTS

LINEAR JOINT	ANGLE JOINT	T-JOINT	CROSS JOINT	WALL-CEILING JOINT	FINISH
					●
UR01	UL01	UT01	UC01	UV01	


Joints, other than Linear joint, require a technical drawing

Reference order | XX01.TR.XX

ALBA PLUS

REF 10178.TR


PHOTOMETRY

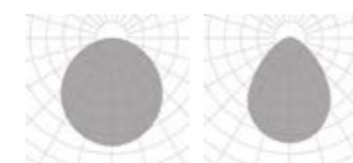

OPAL MICROPRISMATIC

PROFILE

12,5mm Standard Ceiling

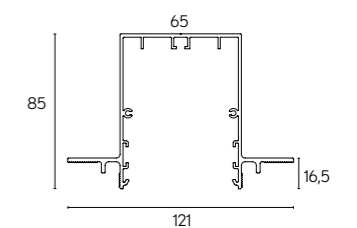

*1 Tunable White (TW) values correspond to 2700K and 6500K - TW is only available for DALI DT8 dimmable (.DA), CRI 80 (8) 700mA. Los valores del blanco dinámico (TW) corresponden a 2700K y 6500K. -TW solo está disponible con protocolo DALI DT8 (.DA), CRI 80 (8) 700mA.
 *2 Down light (direct light) works at 500mA. La luz directa trabaja a 500mA.

new



FINISHES

● COLORS



DIMENSIONS

◆ PROFILE LENGTHS mm.

843 | 1124 | 1405 | 1686 | 1967 | 2248

LIGHTING OPTIONS

■ DIFFUSERS

OPAL | MICROPRISMATIC

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K | TW

▼ DIMMABLE OPTIONS


DALI | 1.10 |

▲ LIGHT DISTRIBUTION

DOWN

LUMINAIRE INCLUDES

Track adapter
Diffuser
Electric system

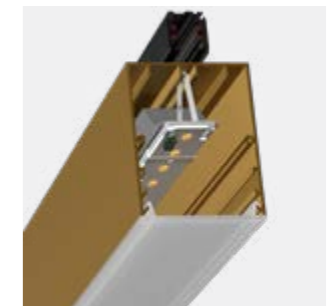

ON DEMAND

Emergency Lighting*
Motion Detection
Custom dimensions
Special Color Temperature
RGB
Thematic LED
Wireless Control Options (Casambi)
CRI 80

* Delivered separately
(not installed in luminaire).

TRACKLIGHT
TK

INSTALLATIONS



ALBA PLUS

REF 10178.TK


.PN
PENDANT
10178 ALBA PLUS|PN
Pag. 246

.TK
TRACK
10178 ALBA PLUS|TK
Pag. 764

.SR
SURFACE
10178 ALBA PLUS|SR
Pag. 246

.RF
RECESSED FRAME
10178 ALBA PLUS|RF
Pag. 452

.TR
TRIMLESS
10178 ALBA PLUS|TR
Pag. 652

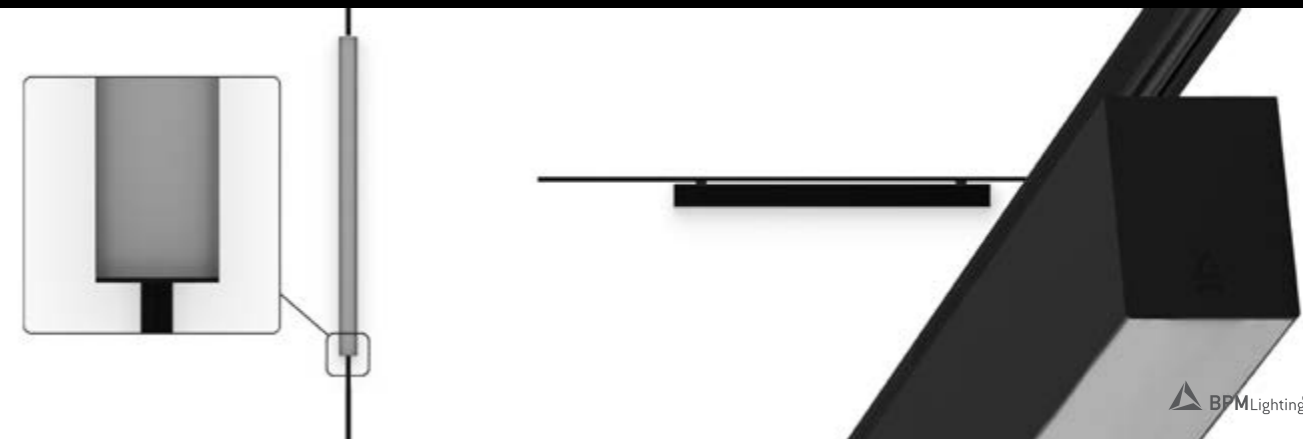

REF.	PROFILE LENGTH		FINISH	DIFFUSER	POWER	CRI	DOWNLIGHT *2 LUMEN				WATT		DIMM
	MM	MM					.27	.30	.40	.TW *1	K	TW	
10178	.03	843	●	.OP .MP	.ST	.9	2295	2385	2475	5700-8520	18	38	.DA .D1
	.04	1124					3060	3180	3300	7600-11360	24	51	
	.05	1405					3825	3975	4125	9500-14200	30	64	
	.06	1686					4590	4770	4950	11400-17040	35	76	
	.07	1967					5355	5565	5775	13300-19880	41	89	
	.08	2248					6120	6360	6600	15200-22720	47	102	

REF.	PROFILE LENGTH		FINISH	DIFFUSER	POWER	CRI	DOWNLIGHT *2 LUMEN			WATT	DIMM
	MM	MM					.27	.30	.40		
10178	.03	843	●	.OP .MP	.HI	.9	4590	4767	4956	35	.DA .D1
	.04	1124					6120	6356	6608	47	
	.05	1405					7650	7945	8260	59	
	.06	1686					9180	9534	9912	71	
	.07	1967					10710	11123	11564	83	
	.08	2248					12240	12712	13216	94	

Reference order | 10178.XX.TK.XX.XX.XX.XX.XX.XX.XX

Total length = Profile length + 20mm + 2x3mm (Cover kit)

Select finishes




COMPONENTS

COVER KIT	REF.	FINISH
	TF01	●

Reference order | TF01.TK.XX

REDUGER	REF.	POWER
	ACC.RG	.ST .HI

Reference order | ACC.RG.XX

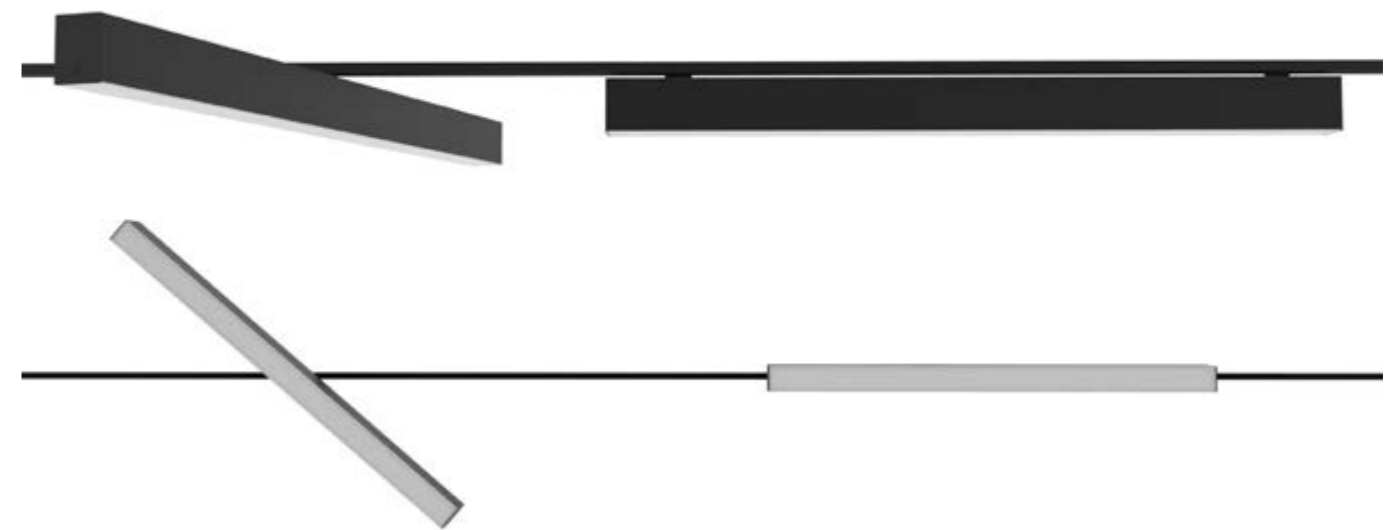


TRACKLIGHT
TK

ALBA PLUS

REF 10178.TK



PHOTOMETRY

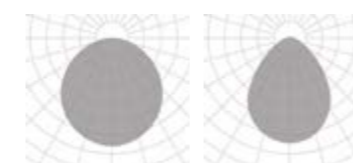


OPAL MICROPRISMATIC

INCLUDED



ACC.ADP

PROFILE



*1 Tunable White (TW) values correspond to 2700K and 6500K - TW is only available for DALI DT8 dimmable (.DA), CRI 80 (8) 700mA. Los valores del blanco dinámico (TW) corresponden a 2700K y 6500K. -TW solo está disponible con protocolo DALI DT8 (.DA), CRI 80 (8) 700mA.
*2 Down light (direct light) works at 500mA. La luz directa trabaja a 500mA.