



new

## FINISHES

### EXTERNAL COLOR



### INTERNAL COLOR



### PROFILE LENGTHS mm.

843 | 1124 | 1405 | 1686 | 1967 | 2248

## LIGHTING OPTIONS

### DIFFUSERS

TRANSPARENT

### POWER

STANDARD | HIGH

### CRI

90

### COLOR TEMPERATURE

2700K | 3000K | 4000K | TW

### DIMMABLE OPTIONS

DALI | 1.10 | PUSH

### LIGHT DISTRIBUTION

ASYMETRIC DOWN


## LUMINAIRE INCLUDES

### .PN

2 x Suspension cables 3m (each 2m)  
NON-DIM DOWN: 1 x Feed Hose 3 x 0,75mm<sup>2</sup>  
DIM DOWN: 1 x Feed Hose 5 x 0,75mm<sup>2</sup>  
Connection box SB09.12

### .SR

Surface mounting kit

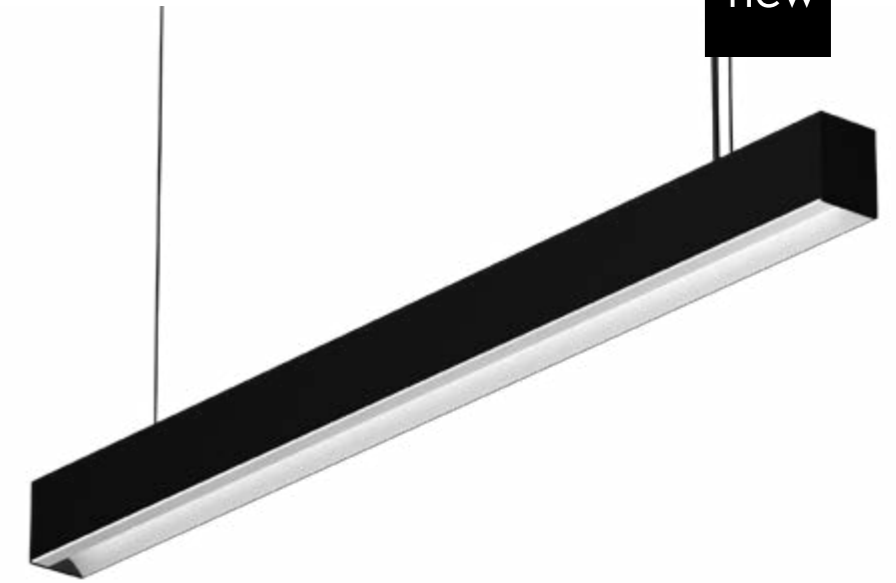

Optimal distance from the wall: 0.5m.  
*Distancia óptima con respecto a la pared: 0.5m.*



### ON DEMAND

Emergency Lighting\*  
Custom dimensions  
Special Color Temperature  
RGB  
Thematic LED  
Wireless Control Options (Casambi)  
CRI 80  
Motion Detection

\* Delivered separately  
(not installed in luminaire).

## INSTALLATIONS



# ALBA PLUS ASIMETRIC

REF 210008.PN | 210008.SR

.PN  
PENDANT

·210008 ALBA PLUS  
ASIMETRIC | PN - Pag. 250

.SR  
SURFACE


·210008 ALBA PLUS  
ASIMETRIC | SR - Pag. 250

.RF  
RECESSED FRAME

·210008 ALBA PLUS  
ASIMETRIC | RF - Pag. 456

.TR  
TRIMLESS

·210008 ALBA PLUS  
ASIMETRIC | TR - Pag. 656

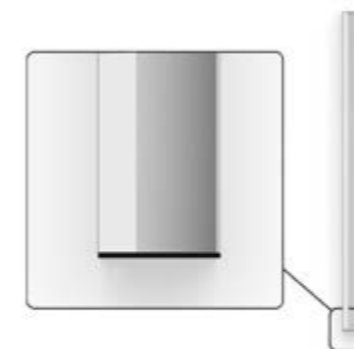

REF.	PROFILE LENGTH		FINISH	DIFFUSER	POWER	CRI	DOWNLIGHT *3   LUMEN				WATT		UPLIGHT ▲.UP *2   LUMEN			WATT	DIMM
	MM	MM					.27	.30	.40	.TW *1	K	TW	.27	.30	.40	K	
210008	.03	843	●	.TP	.ST	.9	2295	2385	2475	5700-5910	18	38	265	274	349	4	.DA .PU .D1
	.04	1124					3060	3180	3300	7600-7880	24	51	397	411	522	6	
	.05	1405					3825	3975	4125	9500-9850	30	64	259	548	696	8	
	.06	1686					4590	4770	4950	11400-11820	35	76	661	685	870	10	
	.07	1967					5355	5565	5775	13300-13790	41	89	793	822	1044	12	
	.08	2248					6120	6360	6600	15200-15760	47	102	925	958	1218	14	

REF.	PROFILE LENGTH		FINISH	DIFFUSER	POWER	CRI	DOWNLIGHT *3   LUMEN			UPLIGHT ▲.UP *2   LUMEN			WATT	DIMM	
	MM	MM					.27	.30	.40	.27	.30	.40	K		
210008	.03	843	●	.TP	.HI	.9	4590	4767	4956	35	568	587	747	8	.DA .PU .D1
	.04	1124					6120	6356	6608	47	851	880	1119	13	
	.05	1405					7650	7945	8260	59	1134	1173	1492	17	
	.06	1686					9180	9534	9912	71	1417	1466	1864	21	
	.07	1967					10710	11123	11564	83	1701	1760	2237	25	
	.08	2248					12240	12712	13216	94	1984	2053	2610	30	

Reference order | 210008.XX | .SR | .PN | .XX.XX.XX | .9.XX.XX

Total length = Profile length + 20mm + 2x3mm (Cover kit)

● Select finish



## COMPONENTS

COVER KIT	REF.	FINISH
	TF05	●
	2x3mm.	

Reference order | TF05 | .SR | .PN | .XX


## JOINTS

LINEAR JOINT
UR05

## OPTIONS (.PN)

SUSPENSION KIT	REF.	DIMENSION	FINISH
	SC05	5M.	.SA
	SC07	7M.	
	SC10	10M.	

Reference order | SCXX.SA

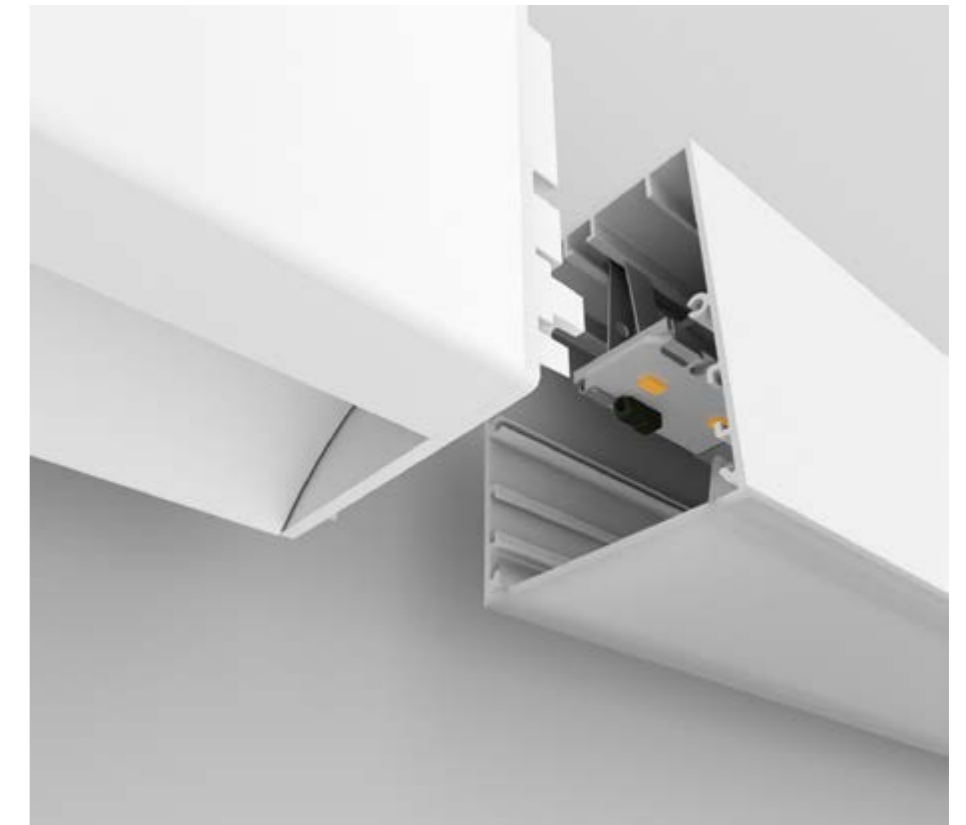

SUSPENSION ROD	REF.	DIMENSIONS	mm	FINISH
	SC21	.60	600	●
		.80	800	
		.100	1000	

Reference order | SC21.XX.XX

Not-included, please select:

CONNECTION BOX	FINISH
	●
CB09.12	

Reference order | CB09.12.XX

\*1 Tunable White (TW) values correspond to 2700K and 6500K - TW is only available for DALI DT8 dimmable (DA), CRI 80 (8) 700mA. Los valores del blanco dinámico (TW) corresponden a 2700K y 6500K. -TW solo está disponible con protocolo DALI DT8 (DA), CRI 80 (8) 700mA.

\*2 Uplight (UP) is only available for ON-OFF and DALI dimmable (DA) options, both in 24VdC. La luz indirecta está solo disponible para versiones on-off y regulación DALI (DA), ambas en 24VdC.


\*3 Down light (direct light) works at 500mA. La luz directa trabaja a 500mA.

## PHOTOMETRY




TRANSPARENT PC

## INCLUDED (.PN)



SC03.SA  
WIRE 3M.

## PROFILE



# ALBA PLUS ASIMETRIC

REF 210008.PN | 210008.SR

new



### FINISHES

● EXTERNAL COLOR



INTERNAL COLOR



● PROFILE LENGTHS mm.

843 | 1124 | 1405 | 1686 | 1967 | 2248

### LIGHTING OPTIONS

■ DIFFUSERS

TRANSPARENT

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K | TW

▼ DIMMABLE OPTIONS



DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

ASYMETRIC DOWN

### LUMINAIRE INCLUDES

Recessed with frame mounting kit

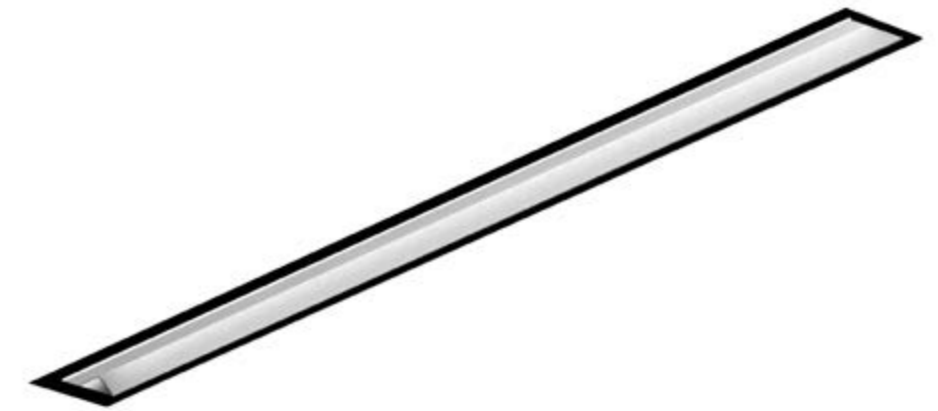

#### ON DEMAND

- Emergency Lighting\*
- Well-Certified LED Boards
- Taylor your own design
- Special Color Temperature
- RGB
- Thematic LED
- Wireless Control Options (Casambi)
- CRI 80
- Motion Detection

\* Delivered separately (not installed in luminaire).

## INSTALLATIONS



# ALBA PLUS ASIMETRIC

REF 210008.RF

.PN  
PENDANT

·210008 ALBA PLUS ASIMETRIC | PN - Pag. 250

.SR  
SURFACE


·210008 ALBA PLUS ASIMETRIC | SR - Pag. 250

.RF  
RECESSED FRAME

·210008 ALBA PLUS ASIMETRIC | RF - Pag. 456

.TR  
TRIMLESS

·210008 ALBA PLUS ASIMETRIC | TR - Pag. 656

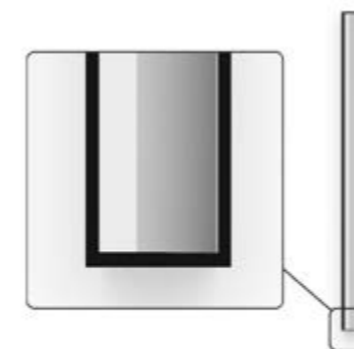




RECESSED FRAME .RF

REF.	PROFILE LENGTH		FINISH	DIFFUSER	POWER	CRI	DOWNLIGHT   LUMEN				WATT		DIMM
	MM	MM					.27	.30	.40	.TW*2	K	TW	
210008	.03	843	●	.TP	.ST	.9	2295	2385	2475	5700-5910	18	38	.DA .PU .D1
	.04	1124					3060	3180	3300	7600-7880	24	51	
	.05	1405					3825	3975	4125	9500-9850	30	64	
	.06	1686					4590	4770	4950	11400-11820	35	76	
	.07	1967					5355	5565	5775	13300-13790	41	89	
	.08	2248					6120	6360	6600	15200-15760	47	102	

REF.	PROFILE LENGTH		FINISH	DIFFUSER	POWER	CRI	DOWNLIGHT   LUMEN			WATT	DIMM
	MM	MM					.27	.30	.40		
210008	.03	843	●	.TP	.HI	.9	4590	4767	4956	35	.DA .PU .D1
	.04	1124					6120	6356	6608	47	
	.05	1405					7650	7945	8260	59	
	.06	1686					9180	9534	9912	71	
	.07	1967					10710	11123	11564	83	
	.08	2248					12240	12712	13216	94	

Reference order | 210008.XX.RF.XX.XX.XX.XX.XX.XX.XX

 Total length = Profile length + 10mm + 2x8mm (Cover kit)  
 (Total length - 8mm) x 73mm  
 120mm

● Select finish



## COMPONENTS

COVER KIT	REF.	FINISH
	TF05 2x8mm.	●

Reference order | TF05.RF.XX

## JOINTS



RECESSED FRAME

# ALBA PLUS ASIMETRIC

REF 210008.RF



## PHOTOMETRY




TRANSPARENT PC

## INCLUDED



RF INSTALLATION KIT

## PROFILE



\*1 Tunable White (TW) values correspond to 2700K and 6500K - TW is only available for DALI DT8 dimmable (.DA), CRI 80 (.8) 700mA. Los valores del blanco dinámico (TW) corresponden a 2700K y 6500K. - TW solo está disponible con protocolo DALI DT8 (.DA), CRI 80 (.8) 700mA.  
 \*2 Down light (direct light) works at 500mA. La luz directa trabaja a 500mA.



new

## FINISHES

### EXTERNAL COLOR



### INTERNAL COLOR



### PROFILE LENGTHS mm.

843 | 1124 | 1405 | 1686 | 1967 | 2248

## LIGHTING OPTIONS

### DIFFUSERS

TRANSPARENT

### POWER

STANDARD | HIGH

### CRI

90

### COLOR TEMPERATURE

2700K | 3000K | 4000K | TW

### DIMMABLE OPTIONS



DALI | 1.10 | PUSH

### LIGHT DISTRIBUTION

ASYMETRIC DOWN

## LUMINAIRE INCLUDES

Trimless mounting kit

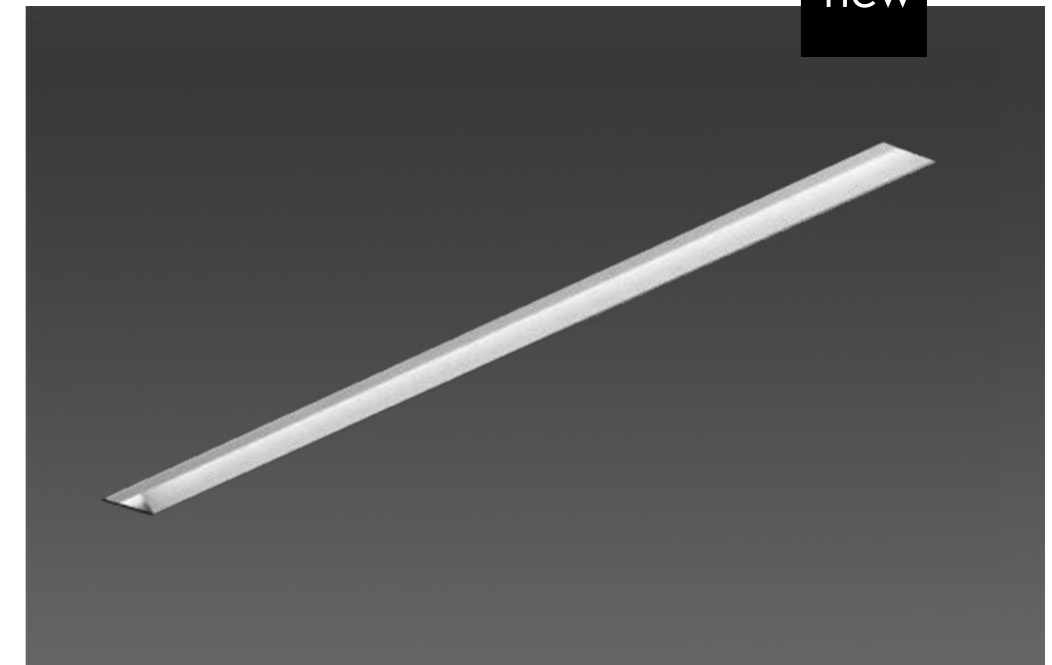

### ON DEMAND

Emergency Lighting\*  
Custom dimensions  
Special Color Temperature  
RGB  
Thematic LED  
Wireless Control Options (Casambi)  
CRI 80  
Motion Detection

\* Delivered separately  
(not installed in luminaire).

## INSTALLATIONS



# ALBA PLUS ASIMETRIC

REF 210008.TR

.PN  
PENDANT

·210008 ALBA PLUS  
ASIMETRIC | PN - Pag. 250

.SR  
SURFACE


·210008 ALBA PLUS  
ASIMETRIC | SR - Pag. 250

.RF  
RECESSED FRAME

·210008 ALBA PLUS  
ASIMETRIC | RF - Pag. 456

.TR  
TRIMLESS

·210008 ALBA PLUS  
ASIMETRIC | TR - Pag. 656

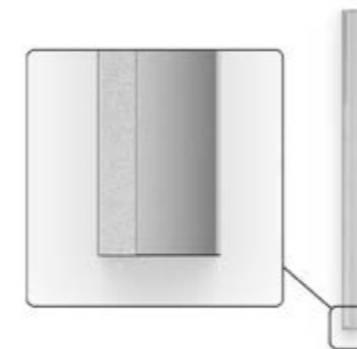




TRIMLESS

.TR

REF.	PROFILE LENGTH		FINISH	DIFFUSER	POWER	CRI	DOWNLIGHT   LUMEN				WATT		DIMM
	MM	MM					.27	.30	.40	.TW*2	K	TW	
210008	.03	843	●	.TP	.ST	.9	2295	2385	2475	5700-5910	18	38	.DA .PU .D1
	.04	1124					3060	3180	3300	7600-7880	24	51	
	.05	1405					3825	3975	4125	9500-9850	30	64	
	.06	1686					4590	4770	4950	11400-11820	35	76	
	.07	1967					5355	5565	5775	13300-13790	41	89	
	.08	2248					6120	6360	6600	15200-15760	47	102	

REF.	PROFILE LENGTH		FINISH	DIFFUSER	POWER	CRI	DOWNLIGHT   LUMEN			WATT	DIMM
	MM	MM					.27	.30	.40		
210008	.03	843	●	.TP	.HI	.9	4590	4767	4956	35	.DA .PU .D1
	.04	1124					6120	6356	6608	47	
	.05	1405					7650	7945	8260	59	
	.06	1686					9180	9534	9912	71	
	.07	1967					10710	11123	11564	83	
	.08	2248					12240	12712	13216	94	


Reference order | 210008.XX.TR.XX.XX.XX.XX.XX.XX.XX

 Total length = Profile length + 10mm + 2x1mm (Cover kit)  
 (Total length + 2mm) x 85mm  
 100mm

● Select finish



## COMPONENTS

COVER KIT	REF.	FINISH
	TF05 2x1mm.	●
Reference order	TF05.TR.XX	●

## JOINTS



# ALBA PLUS ASIMETRIC


REF 210008.TR

## PHOTOMETRY



TRANSPARENT PC

## PROFILE



\*1 Tunable White (TW) values correspond to 2700K and 6500K - TW is only available for DALI DT8 dimmable (.DA), CRI 80 (8) 700mA. Los valores del blanco dinámico (TW) corresponden a 2700K y 6500K. -TW solo está disponible con protocolo DALI DT8 (.DA), CRI 80 (8) 700mA.  
 \*2 Down light (direct light) works at 500mA. La luz directa trabaja a 500mA.