



FINISHES

● COLORS



DIMENSIONS

● DIAMETERS mm. | HEIGHT 114 mm.

650 | 950 | 1250

LIGHTING OPTIONS

■ DIFFUSERS

OPAL | MICROPRISMATIC

POWERS

STANDARD | HIGH

CRI

90

COLOR TEMPERATURES

2700K | 3000K | 4000K | TW

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION OPTIONS

DOWN | UP-DOWN

LUMINAIRE INCLUDES

.PN

3 x Suspension cables 3m
 NON-DIM DOWN: 1 x Feed Hose 3 x 0,75mm²
 DIM DOWN or NON-DIM DOWN-UP: 1 x Feed Hose 5 x 0,75mm²
 DIM DOWN-UP (only): 1 x Feed Hose 5 x 0,75mm²
 Connection box CB03 with luminaire's finish

.SR

Surface mounting kit



ON DEMAND

Special RAL Color
 Special Color Temperature
 Number of switches
 Emergency Lighting*
 CRI 80
 Motion Detection
 RGB
 Wireless Control Options (Casambi)
 Other Dimensions

* Delivered separately
 (not installed in luminaire).

INSTALLATIONS



ALBERTA

REF 10176.PN

.PN
PENDANT



·10176 ALBERTA | PN
Pag. 132

.RF
RECESSED FRAME

·10176 ALBERTA | RF
Pag. 420

.TR
TRIMLESS

·10176 ALBERTA | TR
Pag. 604

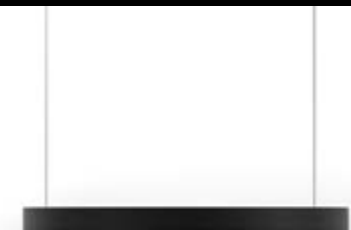



FINISHES

● COLORS



DIMENSIONS

● DIAMETERS mm.

650 | 950 | 1250

LIGHTING OPTIONS

■ DIFFUSERS

OPAL | MICROPRISMATIC

POWERS

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K | TW

▼ DIMMABLE OPTIONS


DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION OPTIONS

DOWN

LUMINAIRE INCLUDES

Recessed with frame mounting kit

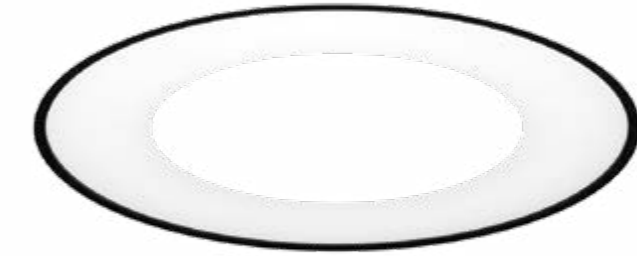

ON DEMAND

Special RAL Color
Special Color Temperature
Number of switches
Emergency Lighting*
CRI 80
Motion Detection
RGB
Wireless Control Options (Casambi)
Other Dimensions

* Accessories are delivered separately
(not installed in luminaire).

INSTALLATIONS



ALBERTA

REF 10176.RF

.PN
PENDANT


·10176 ALBERTA | PN
Pag. 132

.RF
RECESSED FRAME

·10176 ALBERTA | RF
Pag. 420

.TR
TRIMLESS

·10176 ALBERTA | TR
Pag. 604



ALBERTA	REF.	DIMENSION	FINISH	DIFFUSER	POWER	CRI	K	LUMEN	WATT	mA	DIMM	SKETCH					
	10176	.65	●	.OP .MP	.ST	.9	.27	3060	24	500	.DA .PU .D1						
							.30	3180									
							.40	3300									
						.8	.TW *1	9500 - 9850	64	700							
							.HI	.9	.27	-			59	500	.DA .PU .D1		
									.30	6356							
					.40	6608											
						10176	.95	●	.OP .MP	.ST	.9	.27	6120	47	500	.DA .PU .D1	
												.30	6360				
												.40	6600				
											.8	.TW *1	15200 - 15760	102	700		
												.HI	.9	.27	-		
.30	12712																
.40	13216																
	10176	.125	●	.OP .MP						.ST	.9	.27	9180	71	500	.DA .PU .D1	
												.30	9540				
												.40	9900				
											.8	.TW *1	22800 - 23640	152	700		
												.HI	.9	.27	-		
					.30	19068											
					.40	19824											

Reference order | 10176.XX.RF.XX.XX.XX.X.XX.XX



Perfection has a circular shape
La Perfección tiene forma circular

• Select finishes




.WH-WH .BK-BK .GC-GC .BM-BM .BS-BS .BC-BC .CR-CR .CB-CB .GY-GY .MG-MG .VC-VC .YM-YM



ALBERTA


REF 10176.RF

PHOTOMETRY

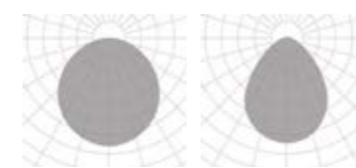


OPAL MICROPRISMATIC

INCLUDED



RF INSTALLATION KIT

PROFILE



125

*1 Tunable White (TW) values correspond to 2700K and 6500K - TW is only available for DALI DT8 dimmable (DA), CRI 80 (8) 700mA. Los valores del blanco dinámico (TW) corresponden a 2700K y 6500K. -TW solo está disponible con protocolo DALI DT8 (DA), CRI 80 (8) 700mA.



FINISHES

● COLORS



DIMENSIONS

● DIAMETERS mm.

650 | 950 | 1250

LIGHTING OPTIONS

■ DIFFUSERS

OPAL | MICROPRISMATIC

POWERS

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K | TW

▼ DIMMABLE OPTIONS


DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION OPTIONS

DOWN

LUMINAIRE INCLUDES

Trimless mounting kit

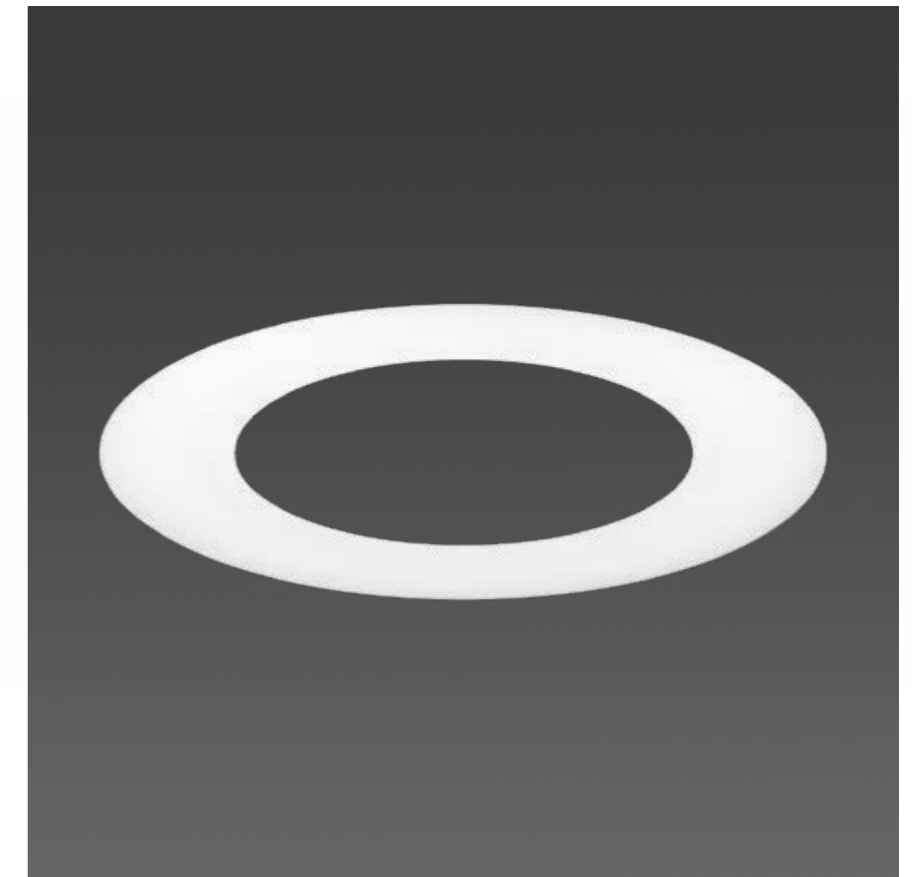

ON DEMAND

Special RAL Color
Special Color Temperature
Number of switches
Emergency Lighting*
CRI 80
Motion Detection
RGB
Wireless Control Options (Casambi)
Other Dimensions


* Accessories are delivered separately
(not installed in luminaire).

INSTALLATIONS



ALBERTA

REF 10176.TR



ALBERTA	REF.	DIMENSION	FINISH	DIFFUSER	POWER	CRI	K	LUMEN	WATT	mA	DIMM	SKETCH
	10176	.65	●	.OP .MP	.ST	.9	.27	3060	24	500	.DA .PU .D1	
							.30	3180				
							.40	3300				
					.HI	.9	.8	.TW *1	9500 - 9850	64	700	.DA
							.9	.27	-	59	500	.DA .PU .D1
								.30	6356			
.40	6608											
	10176	.95	●	.OP .MP	.ST	.9	.27	6120	47	500	.DA .PU .D1	
							.30	6360				
							.40	6600				
					.HI	.9	.8	.TW *1	15200 - 15760	102	700	.DA
							.9	.27	-	94	500	.DA .PU .D1
								.30	12712			
.40	13216											
	10176	.125	●	.OP .MP	.ST	.9	.27	9180	71	500	.DA .PU .D1	
							.30	9540				
							.40	9900				
					.HI	.9	.8	.TW *1	22800 - 23640	152	700	.DA
							.9	.27	-	142	500	.DA .PU .D1
								.30	19068			
.40	19824											

Reference order 10176.XX.TR.XX.XX.XX.X.XX.XX



• Select finishes




.WH-WH

- ALUMINUM PC
- 0°
- 0°
- CRI ≥90
- IK05
- IP20 / IP43
- LIFE 50000H
- DIM OPTIONAL
- INTEGRATED
- RECOOL
- RECOOL
- RECOOL
- 220-240 V 50-60 Hz
- CE

ALBERTA

REF 10176.TR


PHOTOMETRY

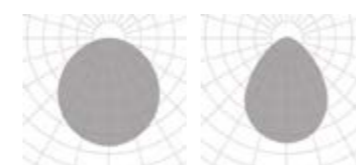

OPAL


MICROPRISMATIC

INCLUDED



TR mounting KIT

PROFILE



*1 Tunable White (TW) values correspond to 2700K and 6500K - TW is only available for DALI DT8 dimmable (.DA), CRI 80 (.8) 700mA. Los valores del blanco dinámico (TW) corresponden a 2700K y 6500K. -TW solo está disponible con protocolo DALI DT8 (.DA), CRI 80 (.8) 700mA.