



FINISHES

● COLORS



DIMENSIONS

● DIAMETERS mm. | HEIGHT 80 mm.

450 | 650 | 950 | 1250 | 1500 | 2000

2500 | 3000 | 4000 | 5000 | 6000

LIGHTING OPTIONS

■ DIFFUSERS

OPAL | MICROPRISMATIC

POWERS

STANDARD

CRI

90

COLOR TEMPERATURES

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION OPTIONS

DOWN | UP-DOWN

LUMINAIRE INCLUDES

.PN

3 x Suspension cables 3m
 NON-DIM DOWN: 1 x Feed Hose 3 x 0,75mm²
 DIM DOWN or NON-DIM DOWN-UP: 1 x Feed Hose 5 x 0,75mm²
 DIM DOWN-UP (only): 1 x Feed Hose 5 x 0,75mm²
 Connection box CB03 with luminaire's finish

.SR

Surface mounting kit



ON DEMAND

Special RAL Color
 Special Color Temperature
 Number of switches
 Emergency Lighting*
 Motion Detection
 Tunable White
 Wireless Control Options (Casambi)
 Other Dimensions

* Delivered separately
 (not installed in luminaire).

INSTALLATIONS



ALBERTA SLIGHT


REF 10193.PN | 10193.SR

.PN
PENDANT

10193 ALBERTA SLIGHT | PN
Pag. 124

.SR
SURFACE

10193 ALBERTA SLIGHT | SR
Pag. 124

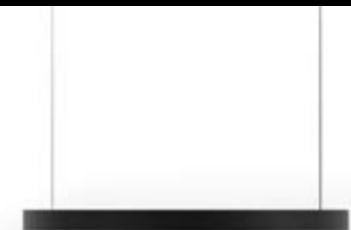

.SR
.PN
PENDANT | SURFACE

ALBERTA SLIGHT	REF.	DIMENSION	FINISH	DIFFUSER	POWER	CRI	K	DOWNLIGHT			UPLIGHT ▲UP *1		DIMM ▼	SKETCH
								LUMEN	WATT	mA	LUMEN	WATT		
	10193	.45	●	.OP .MP	.ST	.9	.27	3157	32	700	605	9	.DA .PU .D1	
							.30	3430			627			
							.40	3500			797			
	10193	.65	●	.OP .MP	.ST	.9	.27	3608	36	700	901	13	.DA .PU .D1	
							.30	3920			933			
							.40	4000			1186			
	10193	.95	●	.OP .MP	.ST	.9	.27	7216	73	700	1344	20	.DA .PU .D1	
							.30	7840			1392			
							.40	8000			1770			
	10193	.125	●	.OP .MP	.ST	.9	.27	10824	109	700	1787	27	.DA .PU .D1	
							.30	11760			1851			
							.40	12000			2353			
	10193	.150	●	.OP .MP	.ST	.9	.27	13530	136	700	2156	32	.DA .PU .D1	
							.30	14700			2234			
							.40	15000			2839			
	10193	.200	●	.OP .MP	.ST	.9	.27	18942	191	700	2894	43	.DA .PU .D1	
							.30	20580			2999			
							.40	21000			3812			
	10193	.250	●	.OP .MP	.ST	.9	.27	28864	291	700	3632	54	.DA .PU .D1	
							.30	31360			3764			
							.40	32000			4784			
	10193	.300	●	.OP .MP	.ST	.9	.27	30668	309	700	4371	65	.DA .PU .D1	
							.30	33320			4529			
							.40	34000			5756			
	10193	.400	●	.OP .MP	.ST	.9	.27	37884	382	700	5847	87	.DA .PU .D1	
							.30	41160			6059			
							.40	42000			7701			

ALBERTA SLIGHT	REF.	DIMENSION	FINISH	DIFFUSER	POWER	CRI	K	DOWNLIGHT			UPLIGHT ▲UP *1		DIMM ▼	SKETCH
								LUMEN	WATT	mA	LUMEN	WATT		
	10193	.500	●	.OP .MP	.ST	.9	.27	46904	473	700	7324	109	.DA .PU .D1	
							.30	50960			7589			
							.40	52000			9645			
	10193	.600	●	.OP .MP	.ST	.9	.27	54120	546	700	8800	131	.DA .PU .D1	
							.30	58800			9119			
							.40	60000			11590			

OPTIONS (.PN) Only for .35 .45 .65 .95 .125 .150 models

CABLE CONCENTRATOR	CONNECTION BOX	REF.	FOR MODEL	FINISH
		CB02	.45	●
			.95	

CABLE CONCENTRATOR KIT	CONNECTION BOX	REF.	FOR MODEL	FINISH
		SC22	.45	●
			.95	


All models Reference order **CBXX.XX**

Reference order **SCXX.XX**


SUSPENSION KIT	REF.	DIMENSION	FINISH
	SC05	5M.	.SA
	SC07	7M.	
	SC10	10M.	

Reference order **SCXX.SA**


Reference order **10193.XX .PN .SR .XX.XX .ST9.XX.XX.XX**

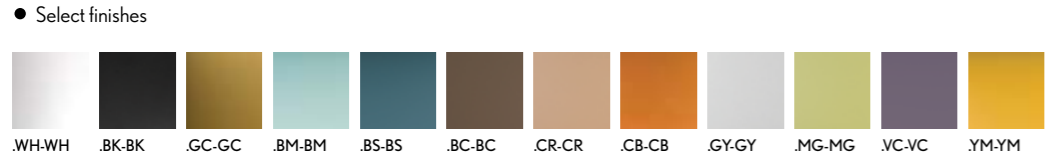


PHOTOMETRY

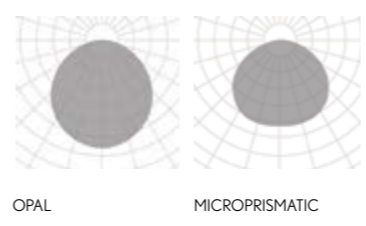

INCLUDED (.PN)



PROFILE



*1 Uplight (UP) is only available for ON-OFF and DALI dimmable (.DA) options, both in 24VdC. La luz indirecta está solo disponible para versiones on-off y regulación DALI (.DA), ambas en 24VdC.