



FINISHES

● COLORS



DIMENSIONS

● DIAMETERS mm. | HEIGHT 80 mm.

650 | 950 | 1250

LIGHTING OPTIONS

■ DIFFUSERS

OPAL | MICROPRISMATIC

POWERS

STANDARD

CRI

90

COLOR TEMPERATURES

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION OPTIONS

DOWN | UP-DOWN

LUMINAIRE INCLUDES

.PN

3 x Suspension cables 3m
 NON-DIM DOWN: 1 x Feed Hose 3 x 0,75mm²
 DIM DOWN or NON-DIM DOWN-UP: 1 x Feed Hose 5 x 0,75mm²
 DIM DOWN-UP (only): 1 x Feed Hose 5 x 0,75mm²
 Connection box CBO3 with luminaire's finish

.SR

Surface mounting kit



ON DEMAND

Special RAL Color
 Special Color Temperature
 Number of switches
 Emergency Lighting*
 Motion Detection
 Wireless Control Options (Casambi)

* Delivered separately
 (not installed in luminaire).

INSTALLATIONS



ALBERTA SLIGHT ECCENTRIC

REF 310005.PN | 310005.SR

.PN
PENDANT

·310005 ALBERTA SLIGHT
ECCENTRIC | PN - Pag. 128

.SR
SURFACE

·310005 ALBERTA SLIGHT
ECCENTRIC | SR - Pag. 128



PENDANT | SURFACE

ALBERTA SLIGHT ECCENTRIC	REF.	DIMENSION	FINISH	DIFFUSER	POWER	CRI	K	DOWNLIGHT			UPLIGHT ▲UP *1		DIMM ▼	SKETCH
								LUMEN	WATT	mA	LUMEN	WATT		
	310005	.65	●	.OP .MP	.ST	.9	.27	10373	104	700	901	13	.DA .PU .D1	 Int. Ø 235 Ext. Ø 650
								11270			933			
								11500			1186			
	310005	.95	●	.OP .MP	.ST	.9	.27	19393	195	700	1344	20	.DA .PU .D1	 Int. Ø 430 Ext. Ø 950
								21070			1392			
								21500			1770			
	310005	.125	●	.OP .MP	.ST	.9	.27	28864	291	700	1787	27	.DA .PU .D1	 Int. Ø 730 Ext. Ø 1250
								31360			1851			
								32000			2353			

Reference order | 310005.XX | .SR | .PN | .XX.XX | .ST9.XX.XX.XX

OPTIONS (.PN)

CABLE CONCENTRATOR	CONNECTION BOX	REF.	FOR MODEL	FINISH	CABLE CONCENTRATOR KIT	CONNECTION BOX	REF.	FOR MODEL	FINISH
	 Ø150	CB02	.65	●		 Ø125 + CB02	SC22	.65	●
	 Ø310					 Ø215 + CB05			

Reference order | CBXX.XX

Reference order | SCXX.XX

SUSPENSION KIT	REF.	DIMENSION	FINISH
	SC05	5M.	.SA
	SC07	7M.	
	SC10	10M.	

Reference order | SCXX.XX

*1 Uplight (UP) is only available for ON-OFF and DALI dimmable (.DA) options, both in 24VdC. La luz indirecta está solo disponible para versiones on-off y regulación DALI (.DA), ambas en 24VdC.


• Select finishes



ALBERTA SLIGHT ECCENTRIC

REF 310005.PN | 310005.SR

SUSPENSION OPTIONS (.PN)

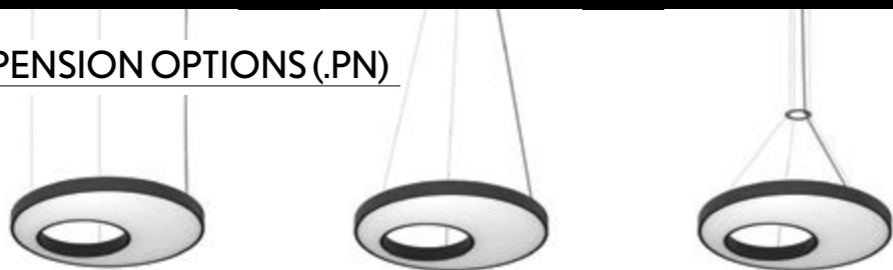


DEFAULT

CABLE CONCENTRATOR

CABLE CONCENTRATOR KIT


PHOTOMETRY

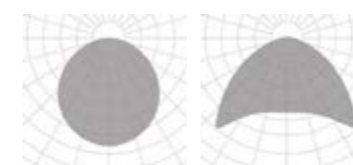

OPAL

MICROPRISMATIC


INCLUDED (.PN)

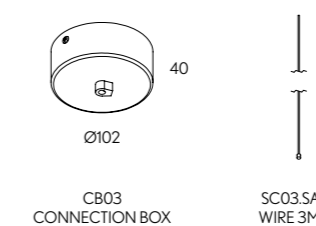

CB03 CONNECTION BOX

SC03.SA WIRE 3M.

PROFILE



80

10

SR
PN
PENDANT | SURFACE