

FINISHES

● COLORS



DIMENSIONS

● DIAMETERS mm. | HEIGHT 38 mm.

350 | 450 | 650 | 950 | 1250 | 1500

2000 | 2500 | 3000 | 3500 | 4000 | 5000 | 6000

LIGHTING OPTIONS

■ DIFFUSERS

SILICONE

POWERS

HIGH

CRI

90

COLOR TEMPERATURES

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION OPTIONS

DOWN | UP-DOWN

LUMINAIRE INCLUDES

.PN

For feed hoses and suspension details refer to mapping table in page 123

.SR

Surface mounting kit




ON DEMAND

Special RAL Color
Number of switches
Emergency Lighting*
Motion Detection
Tunable White
RGB
Wireless Control Options (Casambi)

* Delivered separately
(not installed in luminaire).

INSTALLATIONS

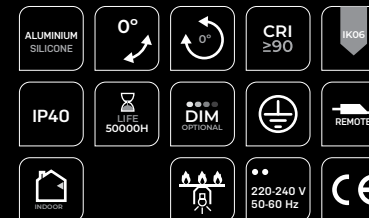

ALBERTA SOFT

REF 10217.PN | 10217.SR



.PN
PENDANT

·10217 ALBERTA SOFT | PN
Pag. 118




.SR
SURFACE

·10217 ALBERTA SOFT | SR
Pag. 118



.RF
RECESSED FRAME

·10217 ALBERTA SOFT | RF
Pag. 416

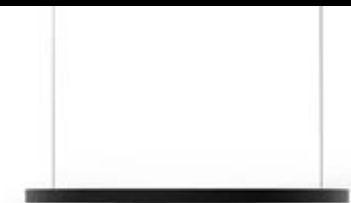















PENDANT | SURFACE













.SR

.PN

PENDANT | SURFACE

ALBERTA SOFT	REF.	DIMENSION	FINISH	DIFFUSER	POWER	CRI	K	DOWNLIGHT			UPLIGHT ▲UP*1		DIMM ▼	SKETCH
								LUMEN	WATT	mA	LUMEN	WATT		
	10217	.35	●	.SI	.HI	.9	.27	5280	56	700	3960	30	.DA .PU .D1	 Int. Ø 286 Ext. Ø 350
								5316			4136			
								5844			4158			
	10217	.45	●	.SI	.HI	.9	.27	7086	70	700	5092	40	.DA .PU .D1	 Int. Ø 386 Ext. Ø 450
								7121			5318			
								7747			5346			
	10217	.65	●	.SI	.HI	.9	.27	8785	86	700	7356	58	.DA .PU .D1	 Int. Ø 586 Ext. Ø 650
								9040			7682			
								9687			7724			
	10217	.95	●	.SI	.HI	.9	.27	13298	129	700	10746	84	.DA .PU .D1	 Int. Ø 886 Ext. Ø 950
								13519			11224			
								14703			11284			
	10217	.125	●	.SI	.HI	.9	.27	17816	172	700	14138	112	.DA .PU .D1	 Int. Ø 1186 Ext. Ø 1250
								18135			14766			
								18118			14846			
	10217	.150	●	.SI	.HI	.9	.27	-	185	500	-	134	.DA .PU .D1	 Int. Ø 1436 Ext. Ø 1500
								25440			17722			
								26400			17816			
	10217	.200	●	.SI	.HI	.9	.27	-	253	500	-	180	.DA .PU .D1	 Int. Ø 1936 Ext. Ø 2000
								34185			23628			
								35475			23754			

*1 Uplight (UP) is only available for ON-OFF and DALI dimmable (.DA) options, both in 24VdC. La luz indirecta está solo disponible para versiones on-off y regulación DALI (.DA), ambas en 24VdC.

ALBERTA SOFT	REF.	DIMENSION	FINISH	DIFFUSER	POWER	CRI	K	DOWNLIGHT			UPLIGHT ▲UP*		DIMM ▼	SKETCH
								LUMEN	WATT	mA	LUMEN	WATT		
	10217	.250	●	.SI	.HI	.9	.27	-	318	500	-	226	.DA .PU .D1	 Int. Ø 2436 Ext. Ø 2500
								42930			42930			
								44550			44550			
	10217	.300	●	.SI	.HI	.9	.27	-	383	500	-	270	.DA .PU .D1	 Int. Ø 2936 Ext. Ø 3000
								51675			51675			
								53625			53625			
	10217	.350	●	.SI	.HI	.9	.27	-	433	700	-	316	.DA .PU .D1	 Int. Ø 3436 Ext. Ø 3500
								59875			60420			
								62843			62700			
	10217	.400	●	.SI	.HI	.9	.27	-	513	500	-	360	.DA .PU .D1	 Int. Ø 3936 Ext. Ø 4000
								69165			69165			
								71775			71775			
	10217	.500	●	.SI	.HI	.9	.27	-	643	500	-	452	.DA .PU .D1	 Int. Ø 4936 Ext. Ø 5000
								86655			87395			
								89925			90860			
	10217	.600	●	.SI	.HI	.9	.27	-	772	500	-	542	.DA .PU .D1	 Int. Ø 5936 Ext. Ø 6000
								104145			104874			
								108075			109032			

Reference order | 10217.XX | .SR | .PN | .XX.XX.HI9.XX.XX.XX

*1 Uplight (UP) is only available for ON-OFF and DALI dimmable (.DA) options, both in 24VdC. La luz indirecta está solo disponible para versiones on-off y regulación DALI (.DA), ambas en 24VdC.


• Select finishes




ALBERTA SOFT

REF 10217.PN | 10217.SR


SUSPENSION OPTIONS (.PN)

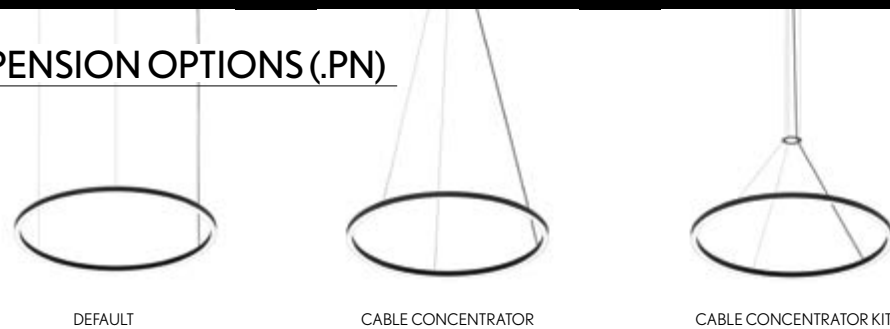


PHOTOMETRY



INCLUDED (.PN)



PROFILE



OPTIONS (.PN) Only for .35 .45 .65 .95 .125 .150 models

CABLE CONCENTRATOR	CONNECTION BOX	REF.	FOR MODEL	FINISH
	40 Ø102	CB10	.35	●
	26 Ø150	CB02	.45 .65	
	47 Ø310	CB05	.95 .125 .150	

Reference order | **CBXX.XX**

CABLE CONCENTRATOR KIT	CONNECTION BOX	REF.	FOR MODEL	FINISH
	Ø85 + CB10	SC21	.35	●
	Ø125 + CB02	SC22	.45 .65	
	Ø215 + CB05	SC23	.95 .125 .150	

Reference order | **SCXX.XX**

All models

SUSPENSION KIT	REF.	DIMENSION	FINISH
	SC05	5M.	.SA
	SC07	7M.	
	SC10	10M.	

Reference order | **SCXX.SA**



BOXES (.PN) Not-included, please select:

CONNECTION BOX AND DRIVER BOX FOR REMOTE DRIVER		DRIVER BOX NON-DIMM		DRIVER BOX DIMMABLE		FINISH
40 Ø102	418	30 45 320	300 Ø66	30 45 400	380 Ø66	●
CB03	CB04.OP*	CB09.32	CB08.30	CB09.40	CB08.38	

*No finish color, use this reference as it is (CB04.OP).
Sin acabado de color, la referencia es tal cual (CB04.OP)

Reference order | **CB09.XX.XX**

LUMINAIRE INCLUDES (.PN)

LUMINAIRE'S DIMENSION	FEED HOSES		SUSPENSIONS
	DOWN	DOWN + UP	
.35	1 Feed Hose 3 x 0,75mm ²	1 Feed Hose 5 x 0,75mm ²	3
.45	1 Feed Hose 3 x 0,75mm ²	1 Feed Hose 5 x 0,75mm ²	3
.65	1 Feed Hose 3 x 0,75mm ²	1 Feed Hose 5 x 0,75mm ²	3
.95	1 Feed Hose 3 x 0,75mm ²	1 Feed Hose 5 x 0,75mm ²	3
.125	1 Feed Hose 5 x 0,75mm ²	1 Feed Hose 5 x 0,75mm ² 1 Feed Hose 3 x 0,75mm ²	3
.150	1 Feed Hose 5 x 0,75mm ²	1 Feed Hose 5 x 0,75mm ² 1 Feed Hose 3 x 0,75mm ²	3
.200	2 Feed Hose 3 x 0,75mm ²	2 Feed Hose 5 x 0,75mm ²	6
.250	3 Feed Hose 3 x 0,75mm ²	3 Feed Hose 5 x 0,75mm ²	9
.300	4 Feed Hose 3 x 0,75mm ²	4 Feed Hose 5 x 0,75mm ²	12
.350	4 Feed Hose 3 x 0,75mm ²	4 Feed Hose 5 x 0,75mm ²	12
.400	5 Feed Hose 3 x 0,75mm ²	5 Feed Hose 5 x 0,75mm ²	15
.500	7 Feed Hose 3 x 0,75mm ²	7 Feed Hose 5 x 0,75mm ²	21
.600	8 Feed Hose 3 x 0,75mm ²	8 Feed Hose 5 x 0,75mm ²	24

● Select finishes



**ALBERTA
SOFT**

REF 10217.PN | 10217.SR

PENDANT | SURFACE
SR
PN



FINISHES

● COLORS



DIMENSIONS

● DIAMETERS mm.

350 | 450 | 650 | 950 | 1250 | 1500
2000 | 2500 | 3000 | 3500 | 4000 | 5000 | 6000

LIGHTING OPTIONS

■ DIFFUSERS

SILICONE

POWERS

STANDARD

CRI

90

COLOR TEMPERATURES

2700K | 3000K | 4000K


▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION OPTIONS

DOWN

LUMINAIRE INCLUDES

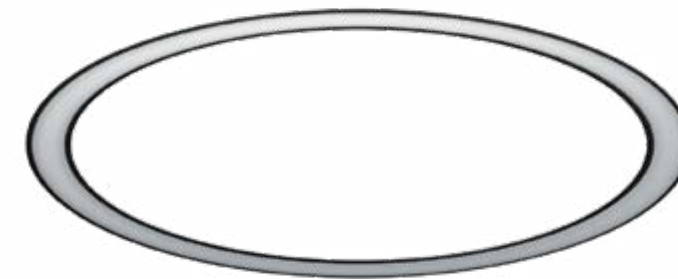

ON DEMAND

- Special RAL Color
- Number of switches
- Emergency Lighting*
- Motion Detection
- Tunable White
- RGB
- Wireless Control Options (Casambi)



* Delivered separately (not installed in luminaire).


.RF
RECESSED FRAME

INSTALLATIONS



ALBERTA SOFT

REF 10217.RF

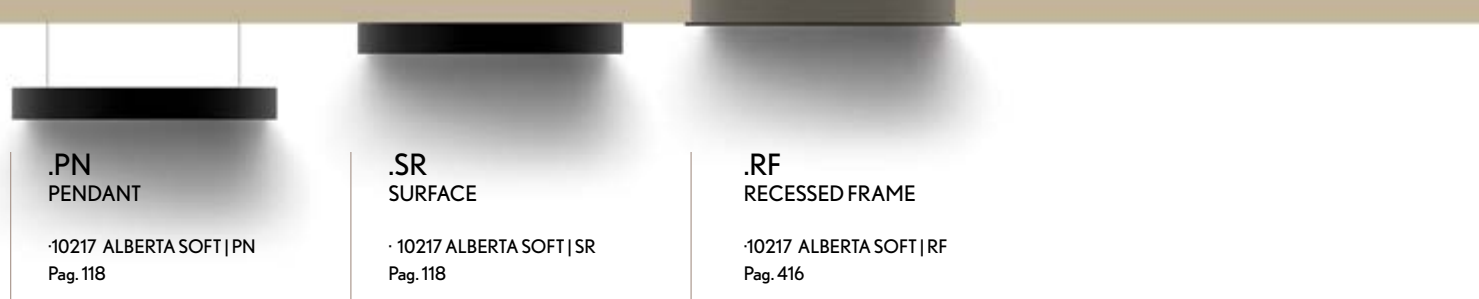

.PN
PENDANT

· 10217 ALBERTA SOFT | PN
Pag. 118

.SR
SURFACE

· 10217 ALBERTA SOFT | SR
Pag. 118

.RF
RECESSED FRAME

· 10217 ALBERTA SOFT | RF
Pag. 416




ALBERTA SOFT	REF.	DIMENSION	FINISH	DIFFUSER	POWER	CRI	K	LUMEN	WATT	mA	DIMM	SKETCH
	10217	.35	●	.SI	.HI	.9	.27	5280	56	700	.DA .PU .D1	INT. Ø 282 EXT. Ø 354
							.30	5316				INT. Ø 286 EXT. Ø 350
							.40	5844				
	10217	.45	●	.SI	.HI	.9	.27	7086	70	700	.DA .PU .D1	INT. Ø 382 EXT. Ø 454
							.30	7121				INT. Ø 386 EXT. Ø 450
							.40	7747				
	10217	.65	●	.SI	.HI	.9	.27	8785	86	700	.DA .PU .D1	INT. Ø 582 EXT. Ø 654
							.30	9040				Int. Ø 586 Ext. Ø 650
							.40	9687				
	10217	.95	●	.SI	.HI	.9	.27	13298	129	700	.DA .PU .D1	INT. Ø 882 EXT. Ø 954
							.30	13519				Ø INT. 886 Ø EXT. 950
							.40	14703				
	10217	.125	●	.SI	.HI	.9	.27	17816	172	700	.DA .PU .D1	INT. Ø 1182 EXT. Ø 1254
							.30	18135				Ø INT. 1186 Ø EXT. 1250
							.40	18118				
	10217	.150	●	.SI	.HI	.9	.27	-	185	500	.DA .PU .D1	INT. Ø 1432 EXT. Ø 1504
							.30	25440				Int. Ø 1436 Ext. Ø 1500
							.40	26400				

Reference order | 10217.XX.RF.XX.XX.HI.9.XX.XX

	10217	.200	●	.SI	.HI	.9	.27	-	253	500	.DA .PU .D1	INT. Ø 1932 EXT. Ø 2004
							.30	34185				Int. Ø 1936 Ext. Ø 2000
							.40	35475				
	10217	.250	●	.SI	.HI	.9	.27	-	318	500	.DA .PU .D1	INT. Ø 2432 EXT. Ø 2504
							.30	42930				Ø INT. 2436 Ø EXT. 2500
							.40	44550				
	10217	.300	●	.SI	.HI	.9	.27	-	383	500	.DA .PU .D1	INT. Ø 2932 EXT. Ø 3004
							.30	51675				Ø INT. 2936 Ø EXT. 3000
							.40	53625				
	10217	.350	●	.SI	.HI	.9	.27	-	433	700	.DA .PU .D1	INT. Ø 3432 EXT. Ø 3504
							.30	59875				Ø INT. 3436 Ø EXT. 3500
							.40	62843				
	10217	.400	●	.SI	.HI	.9	.27	-	513	500	.DA .PU .D1	INT. Ø 3932 EXT. Ø 4004
							.30	86655				Ø INT. 3936 Ø EXT. 4000
							.40	89925				
	10217	.500	●	.SI	.HI	.9	.27	-	643	500	.DA .PU .D1	INT. Ø 4932 EXT. Ø 5004
							.30	86655				Ø INT. 4936 Ø EXT. 5000
							.40	89925				
	10217	.600	●	.SI	.HI	.9	.27	-	772	500	.DA .PU .D1	INT. Ø 5932 EXT. Ø 6004
							.30	104145				Ø INT. 5936 Ø EXT. 6000
							.40	108075				

Reference order | 10217.XX.RF.XX.XX.HI.9.XX.XX


Select finishes

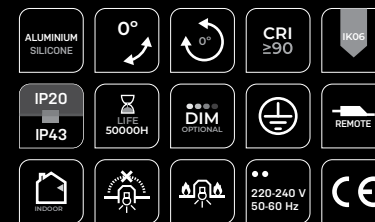

ALBERTA SOFT


REF 10217.RF

PHOTOMETRY




SILICONE

INCLUDED



RF INSTALLATION KIT

PROFILE

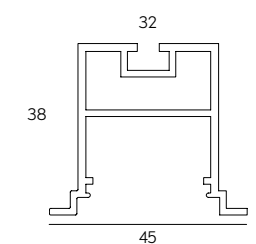

RECESSED FRAME