



## FINISHES

### ● COLORS



## DIMENSIONS

● SIZES mm. | HEIGHT 114 mm.  
400x400 | 600x600 | 900x900 | 1200x1200

## LIGHTING OPTIONS

### ■ DIFFUSERS

OPAL | MICROPRISMATIC

### POWERS

STANDARD | HIGH

### CRI

90

### COLOR TEMPERATURES

2700K | 3000K | 4000K | TW

### ▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

### ▲ LIGHT DISTRIBUTION OPTIONS

DOWN | UP-DOWN


## LUMINAIRE INCLUDES

### .PN

4 x Suspension cables 3m  
NON-DIM DOWN: 1x Feed Hose 3 x 0,75mm<sup>2</sup>  
DIM DOWN or NON-DIM DOWN-UP: 1x Feed Hose 5 x 0,75mm<sup>2</sup>  
DIM DOWN-UP (only): 1x Feed Hose 5 x 0,75mm<sup>2</sup>  
Connection box CB09.12 with luminaire's finish

### .SR

Surface mounting kit

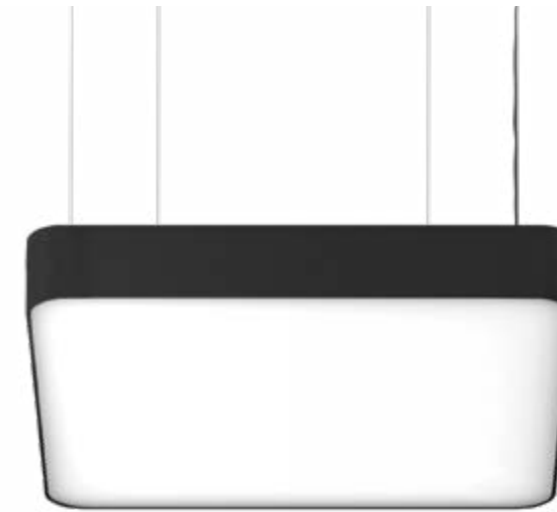

### ON DEMAND

Special RAL Color  
Special Color Temperature  
Number of switches  
Emergency Lighting\*  
CRI 80  
Motion Detection  
RGB  
Wireless Control Options (Casambi)

\* Delivered separately  
(not installed in luminaire).

## INSTALLATIONS



# ALTAIR

REF 10172.PN | 10172.SR

.PN  
PENDANT


·10172 ALTAIR | PN  
Pag. 82

.SR  
SURFACE

·10172 ALTAIR | SR  
Pag. 82

.TR  
TRIMLESS

·10172 ALTAIR | TR  
Pag. 584

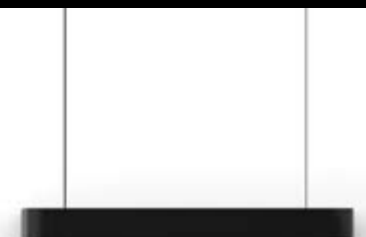

PENDANT | SURFACE  
SR  
PN

ALTAIR	REF.	DIMENSIONS	FINISH	DIFFUSER	POWER	CRI	K	DOWNLIGHT			UPLIGHT ▲ UP *2		DIMM ▼	SKETCH						
								LUMEN	WATT	mA	LUMEN	WATT								
	10172	.45	●	.OP .MP	.ST	.9	.27	3060	24	500	564	8	.DA .PU .D1							
							.30	3180			584									
							.40	3300			743									
							.8	.TW *1	7600 - 7880	51	700				-	-	.DA			
							.HI	.9	.27	6120	47				500	1210	18	.DA .PU .D1		
									.30	6356						1252				
					.40	6608			1591											
						10172	.65	●	.OP .MP	.ST	.9	.27	6120		47	500	940	14	.DA .PU .D1	
												.30	6360				974			
.40	6600	1238																		
.8	.TW *1	15200 - 15760	102	700								-	-	.DA						
.HI	.9	.27	12240	94								500	2016	30	.DA .PU .D1					
		.30	12712										2086							
		.40	13216							2652										
	10172	.95	●	.OP .MP						.ST	.9	.27	11475	89	500	1504	22	.DA .PU .D1		
												.30	11925			1558				
					.40	12375	1981													
					.8	.TW *1	28500 - 29550	191	700			-	-	.DA						
					.HI	.9	.27	22950	177			500	3226	48	.DA .PU .D1					
							.30	23835					3338							
							.40	24780		4243										
						10172	.125	●	.OP .MP	.ST	.9	.27	18360	142	500	2068	31	.DA .PU .D1		
												.30	19080			2143				
.40	19800	2724																		
.8	.TW *1	45600 - 47280	305	700								-	-	.DA						
.HI	.9	.27	36720	283								500	4435	66	.DA .PU .D1					
		.30	38136										4589							
		.40	39648							5834										

Reference order | 10172.XX | .SR | .PN | .XX.XX.XX.XX.XX.XX.XX



.SR  
.PN  
PENDANT | SURFACE


• Select finishes




# ALTAIR

REF 10172.PN | 10172.SR

## PHOTOMETRY

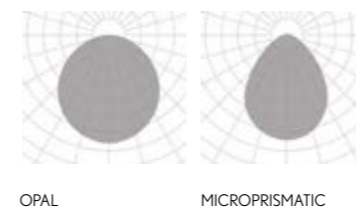

## INCLUDED (.PN)



## PROFILE



\*1 Tunable White (TW) values correspond to 2700K and 6500K - TW is only available for DALI DT8 dimmable (.DA), CRI 80 (.B) 700mA. Los valores del blanco dinámico (TW) corresponden a 2700K y 6500K. -TW solo está disponible con protocolo DALI DT8 (.DA), CRI 80 (.B) 700mA.

\*2 Uplight (UP) is only available for ON-OFF and DALI dimmable (.DA) options, both in 24VdC. La luz indirecta está solo disponible para versiones on-off y regulación DALI (.DA), ambas en 24VdC.



## FINISHES

### ● COLORS



## DIMENSIONS

### ● SIZES mm.

393x393 | 593x593 | 893x893 | 1193x1193

## LIGHTING OPTIONS

### ■ DIFFUSERS

OPAL | MICROPRISMATIC

### POWERS

STANDARD | HIGH

### CRI

90

### COLOR TEMPERATURE

2700K | 3000K | 4000K | TW

### ▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

### ▲ LIGHT DISTRIBUTION OPTIONS

DOWN

## LUMINAIRE INCLUDES

Trimless mounting kit



### ON DEMAND

Special RAL Color  
Special Color Temperature  
Number of switches  
Emergency Lighting\*  
CRI 80  
Motion Detection  
RGB  
Wireless Control Options (Casambi)

\* Accessories are delivered separately  
(not installed in luminaire).

## INSTALLATIONS



# ALTAIR

REF 10172.TR

.PN  
PENDANT


-10172 ALTAIR | PN  
Pag. 82

.SR  
SURFACE

-10172 ALTAIR | SR  
Pag. 82

.TR  
TRIMLESS

-10172 ALTAIR | TR  
Pag. 584



ALTAIR	REF.	DIMENSION ▲	FINISH ●	DIFFUSER ■	POWER	CRI	K	LUMEN	WATT	mA	DIMM ▼	SKETCH
	10172	.45	●	.OP .MP	.ST	.9	.27	3060	24	500	.DA .PU .D1	
							.30	3180				
							.40	3300				
					.HI	.9	.27	7600 - 7880	51	700	.DA .PU .D1	
							.30	6120				
							.40	6356				
	10172	.65	●	.OP .MP	.ST	.9	.27	6120	47	500	.DA .PU .D1	
							.30	6360				
							.40	6600				
					.HI	.9	.27	15200 - 15760	102	700	.DA .PU .D1	
							.30	12240				
							.40	12712				
	10172	.95	●	.OP .MP	.ST	.9	.27	11475	89	500	.DA .PU .D1	
							.30	11925				
							.40	12375				
					.HI	.9	.27	28500 - 29550	191	700	.DA .PU .D1	
							.30	22950				
							.40	23835				
	10172	.125	●	.OP .MP	.ST	.9	.27	18360	142	500	.DA .PU .D1	
							.30	19080				
							.40	19800				
					.HI	.9	.27	45600 - 47280	305	700	.DA .PU .D1	
							.30	36720				
							.40	38136				
						.40	39648					

Reference order | 10172.XX.TR.XX.XX.XX.XX.XX.XX



• Select finishes




.WH-WH

- ALUMINUM PC
- 0°
- 0°
- CRI ≥90
- IK05
- IP20
- IP43
- LIFE 50000H
- DIM OPTIONAL
- INTEGRATED
- RECOOL
- RECOOL
- RECOOL
- 220-240 V 50-60 Hz
- CE

# ALTAIR

REF 10172.TR


## PHOTOMETRY

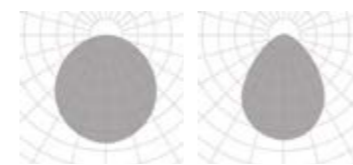

OPAL


MICROPRISMATIC

## INCLUDED



TR mounting KIT

## PROFILE



125

.TR

TRIMLESS