



FINISHES

● COLORS



DIMENSIONS

● PROFILE LENGTHS mm.

843 | 1124 | 1405 | 1686 | 1967 | 2248

LIGHTING OPTIONS

■ DIFFUSERS

OPAL | MICROPRISMATIC

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K | TW

▼ DIMMABLE OPTIONS


DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

LUMINAIRE INCLUDES

2 x Suspension cables 3m (each 2m)
Diffuser
Connection Box

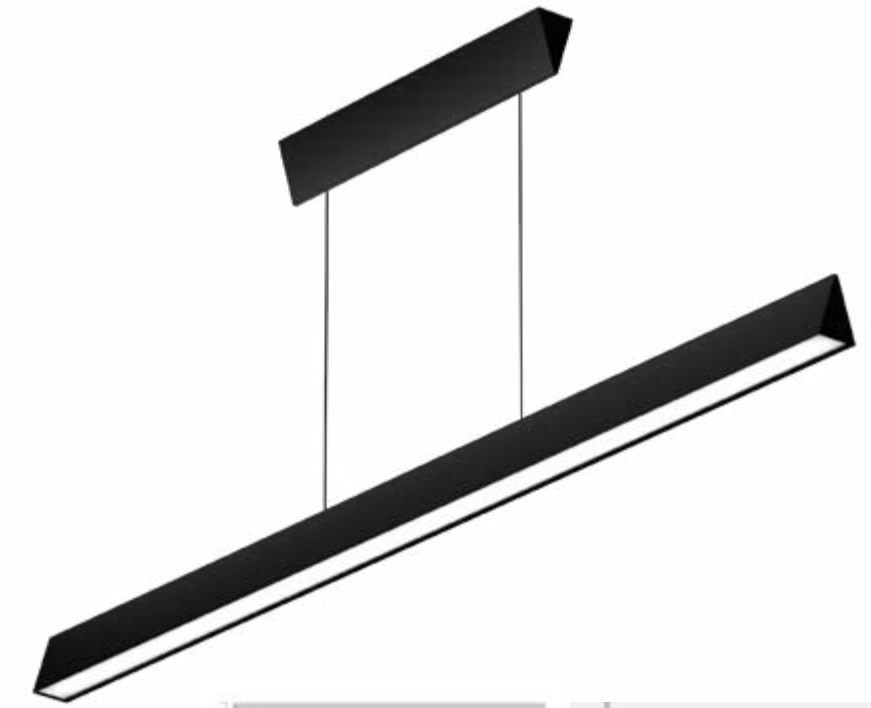

ON DEMAND

Emergency Lighting *
Motion Detection
Special Color Temperature
RGB
Thematic LED
Wireless Control Options (Casambi)
CRI 80

* Delivered separately
(not installed in luminaire).

INSTALLATIONS

.PN
PENDANT

·10169 ALZIRA | PN
Pag. 266


.WS
WALL SURFACE

·10169 ALZIRA | WS
Pag. 798



ALZIRA

REF 10169.PN

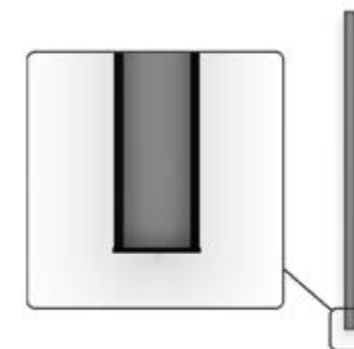

REF.	PROFILE LENGTH		FINISH	DIFFUSER	POWER	CRI	DOWNLIGHT *2 LUMEN				WATT		DIMM
	MM	MM					.27	.30	.40	.TW *1	K	TW	
10169	.03	843	●	.OP .MP	.ST	.9	2295	2385	2475	5700-5910	18	38	.DA .PU .D1
	.04	1124					3060	3180	3300	7600-7880	24	51	
	.05	1405					3825	3975	4125	9500-9850	30	64	
	.06	1686					4590	4770	4950	11400-11820	35	76	
	.07	1967					5355	5565	5775	13300-13790	41	89	
	.08	2248					6120	6360	6600	15200-15760	47	102	

REF.	PROFILE LENGTH		FINISH	DIFFUSER	POWER	CRI	DOWNLIGHT *2 LUMEN			WATT	DIMM
	MM	MM					.27	.30	.40		
10169	.03	843	●	.OP .MP	.HI	.9	4590	4767	4956	35	.DA .PU .D1
	.04	1124					6120	6356	6608	47	
	.05	1405					7650	7945	8260	59	
	.06	1686					9180	9534	9912	71	
	.07	1967					10710	11123	11564	83	
	.08	2248					12240	12712	13216	94	

Reference order | 10169.XX.PN.XX.XX.XX.9.XX.XX


COMPONENTS

COVER KIT	REF.	FINISH
	TF14	●
	2x3mm.	

Reference order | TF14.PN.XX

Total length = Profile length + 20mm + 2x3mm (Cover kit)


Select finishes

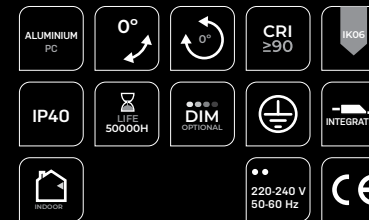

ALZIRA


REF 10169.PN

PHOTOMETRY

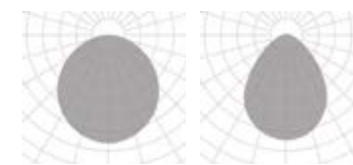


OPAL MICROPRISMATIC

INCLUDED (.PN)

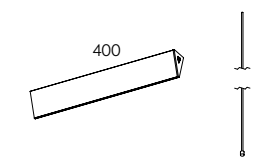

CONNECTION BOX SC03.SA WIRE 3M.

PROFILE



44

*1 Tunable White (TW) values correspond to 2700K and 6500K - TW is only available for DALI DT8 dimmable (.DA), CRI 80 (.8) 700mA. Los valores del blanco dinámico (TW) corresponden a 2700K y 6500K. - TW solo está disponible con protocolo DALI DT8 (.DA), CRI 80 (.8) 700mA.
*2 Down light (direct light) works at 500mA. La luz directa trabaja a 500mA.



FINISHES

● COLORS



DIMENSIONS

◆ LENGTHS mm.

307 | 447 | 588

LIGHTING OPTIONS

■ DIFFUSERS

OPAL | MICROPRISMATIC

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

UP

LUMINAIRE INCLUDES

Wall surface mounting kit
Cover Kit



ON DEMAND

Emergency Lighting *
Motion Detection
Well-Certified LED Boards
Special Color Temperature
RGB
Thematic LED
Wireless Control Options (Casambi)
CRI 80

* Delivered separately
(not installed in luminaire).

.WS

WALL SURFACE

INSTALLATIONS

.PN
PENDANT

·10169 ALZIRA | PN
Pag. 266


.WS
WALL SURFACE

·10169 ALZIRA | WS
Pag. 798



ALZIRA


REF 10169.WS

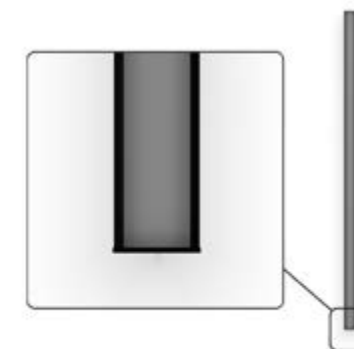

REF.	DIMENSION		FINISH	DIFFUSER	POWER	CRI	DOWNLIGHT LUMEN			WATT	DIMM
	MM	MM					.27	.30	.40		
10169	.01	307	●	.OP .MP	.ST	.9	765	795	825	6	.DA .PU .D1
	.02	447					1148	1193	1238	9	
	.03	588					1530	1590	1650	12	


REF.	DIMENSION		FINISH	DIFFUSER	POWER	CRI	DOWNLIGHT LUMEN			WATT	DIMM
	MM	MM					.27	.30	.40		
10169	.01	307	●	.OP .MP	.HI	.9	1530	1589	1652	12	.DA .PU .D1
	.02	447					2295	2384	2478	18	
	.03	588					3060	3178	3304	24	

Reference order | 10169.XX.WS.XX.XX.XX.9.XX.XX

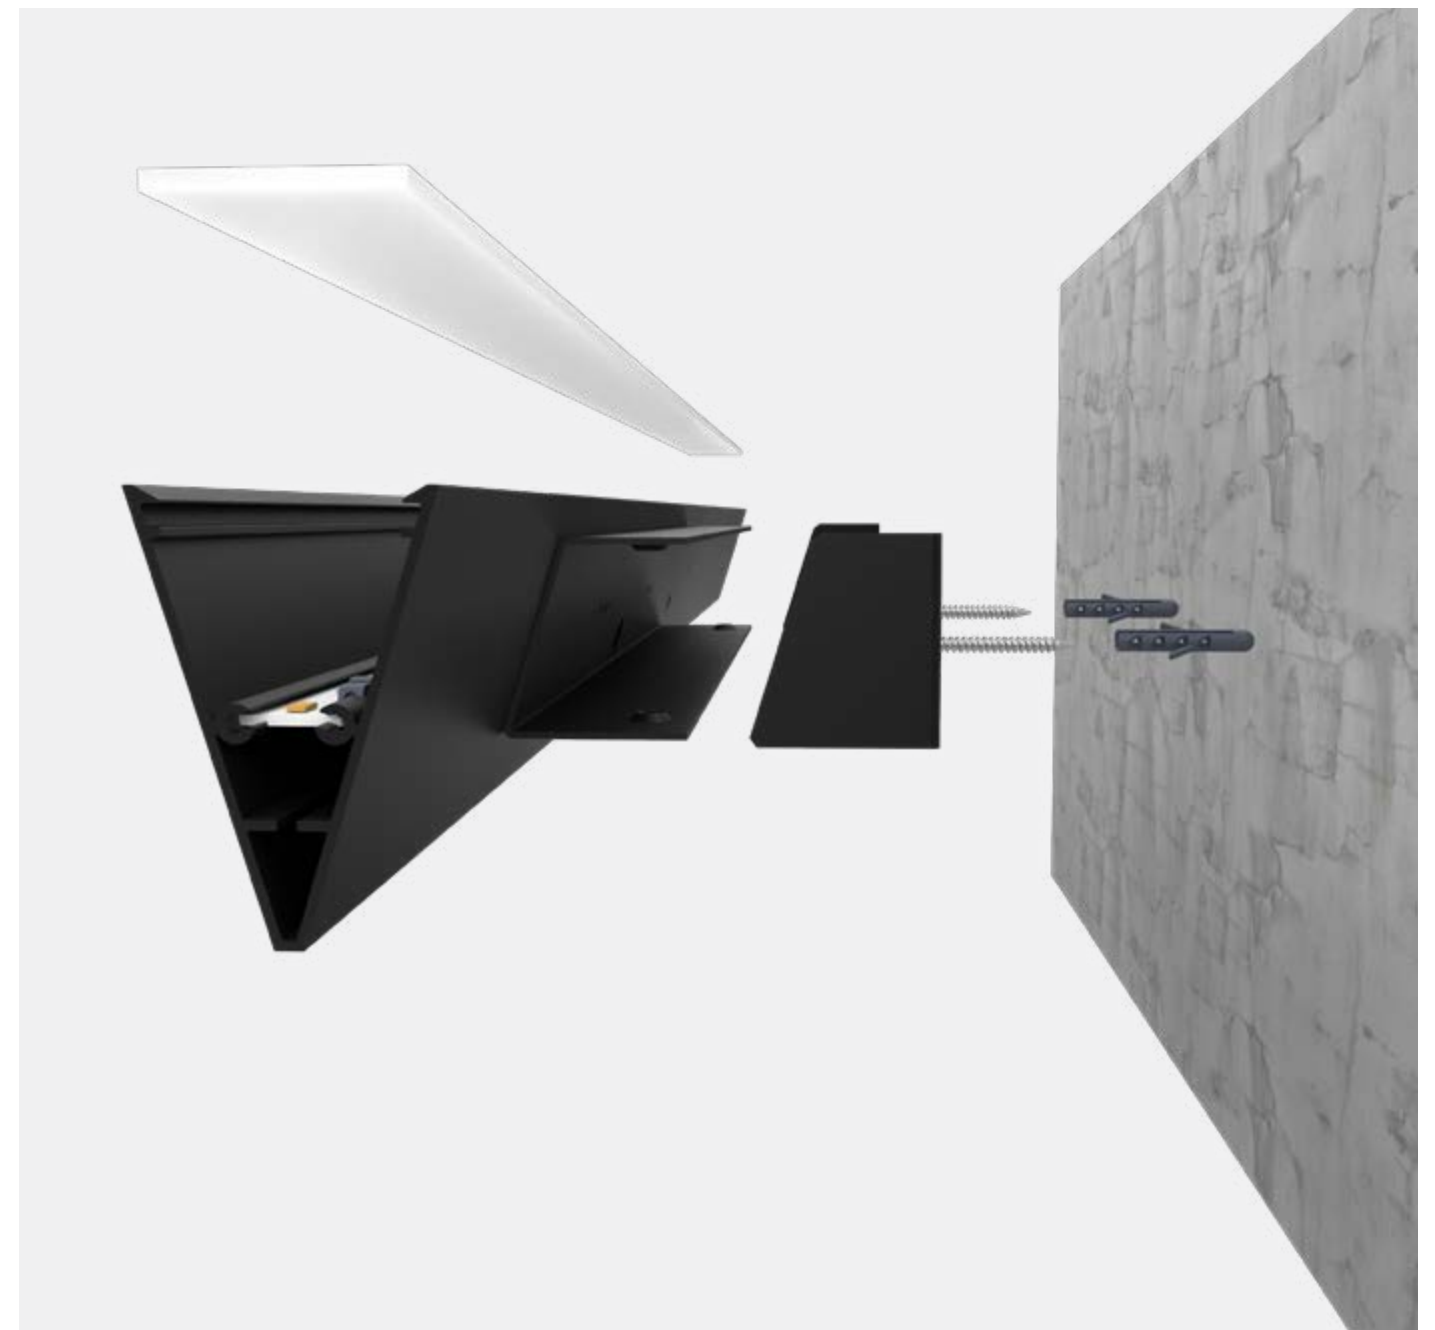

WALL SURFACE


Select finish

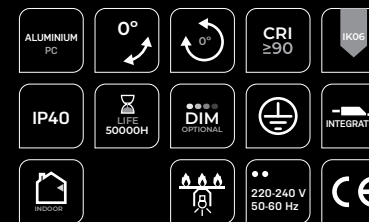


ALZIRA

REF 10169.WS

PHOTOMETRY

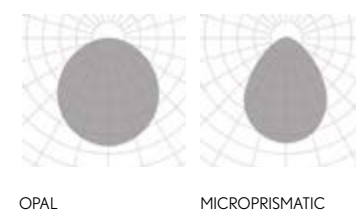

INCLUDED

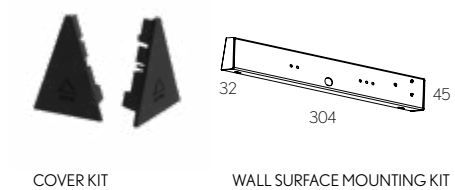

PROFILE

