

SOON

FINISHES

● COLORS



DIMENSIONS

◆ PROFILE LENGTHS mm.

843	1124	1405	1686
800	1520	2950	5100

LIGHTING OPTIONS

■ DIFFUSERS

OPAL

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

LUMINAIRE INCLUDES

.PN

2 x Suspension cables 3m (each 2m or each shape)


NON-DIM DOWN: 1 x Feed Hose 3 x 0,75mm²

DIM DOWN: 1 x Feed Hose 5 x 0,75mm²

Diffuser

.SR

Surface mounting kit

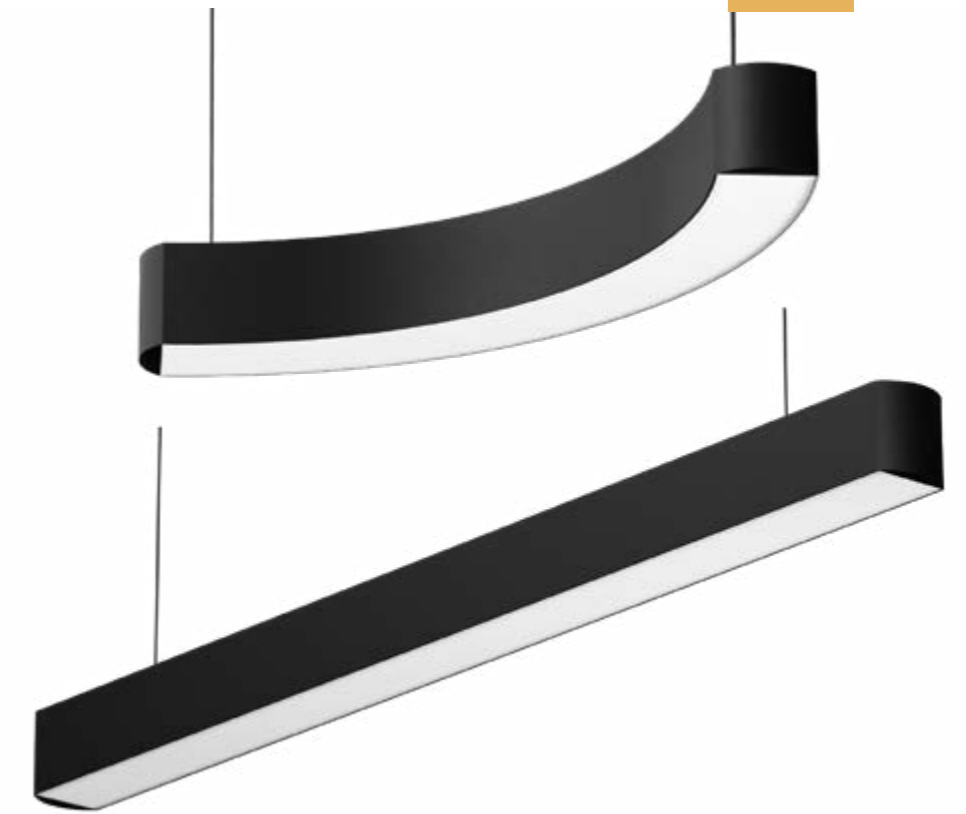

ON DEMAND

- Emergency Lighting *
- Motion Detection
- Custom dimensions
- Special Color Temperature
- RGB
- Wireless Control Options (Casambi)

* Delivered separately
(not installed in luminaire).

INSTALLATIONS



BOLD | BOLD LINE

REF 210001.PN | 210015.PN | 210001.SR | 210015.SR

.PN
PENDANT


·210001 BOLD ·210015 BOLD LINE | PN
Pag. 254

.SR
SURFACE

·210001 BOLD ·210015 BOLD LINE | SR
Pag. 254

.RF
RECESSED FRAME

·210001 BOLD ·210015 BOLD LINE | RF
Pag. 460

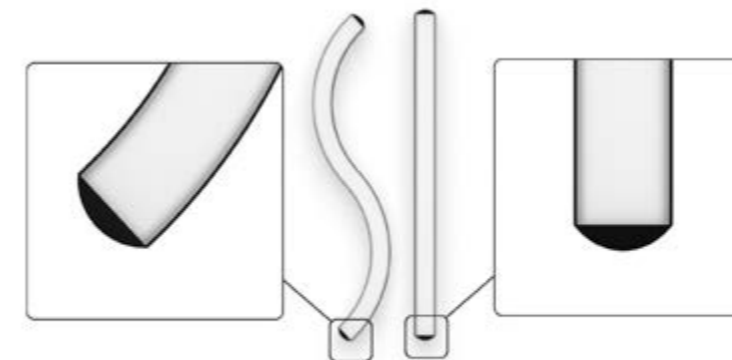

PENDANT | SURFACE

BOLD						
.01	.02	.03	.04	.05	.06	.07
800 mm 45°	800 mm 90°	1520 mm 45°	1520 mm 90°	2950 mm 45°	2950 mm 90°	5100 mm 45°

REF.	DIMENSION	FINISH	DIFFUSER	POWER	CRI	DOWNLIGHT *1 LUMEN			WATT	DIMM
						.27	.30	.40		
210001	.01	●	.OP	.ST	.9	765	795	825	6	.DA .PU .D1
	.02					1530	1590	1650	12	
	.03					1530	1590	1650	12	
	.04					3060	3180	3300	24	
	.05					3060	3180	3300	24	
	.06					6120	6360	6600	47	
	.07					5355	5565	5775	41	

REF.	DIMENSION	FINISH	DIFFUSER	POWER	CRI	DOWNLIGHT *1 LUMEN			WATT	DIMM
						.27	.30	.40		
210001	.01	●	.OP	.HI	.9	1530	1589	1652	12	.DA .PU .D1
	.02					3060	3178	3304	24	
	.03					3060	3178	3304	24	
	.04					6120	6356	6608	47	
	.05					6120	6356	6608	47	
	.06					12240	12712	13216	94	
	.07					10710	11123	11564	83	

Reference order | 210001.XX | .SR | .PN | .XX.XX.XX.9.XX.XX

BOLD LINE	REF.	DIMENSION		FINISH	DIFFUSER	POWER	CRI	DOWNLIGHT *1 LUMEN			WATT	DIMM	
		MM	MM					.27	.30	.40			
	210015	●	.OP	.MP	.ST	.9	.03	843	2295	2385	2475	18	.DA .PU .D1
							.04	1124	3060	3180	3300	24	
							.05	1405	3825	3975	4125	30	
							.06	1686	4590	4770	4950	35	


BOLD LINE	REF.	DIMENSION		FINISH	DIFFUSER	POWER	CRI	DOWNLIGHT *1 LUMEN			WATT	DIMM	
		MM	MM					.27	.30	.40			
	210015	●	.OP	.MP	.ST	.9	.03	843	4590	4767	4956	35	.DA .PU .D1
							.04	1124	6120	6356	6608	47	
							.05	1405	7650	7945	8260	59	
							.06	1686	9180	9534	9912	71	

Reference order | 210015.XX | .SR | .PN | .XX.XX.XX.9.XX.XX

COMPONENTS

COVER KIT	REF.
	TF17

Reference order | TF17.PN.XX

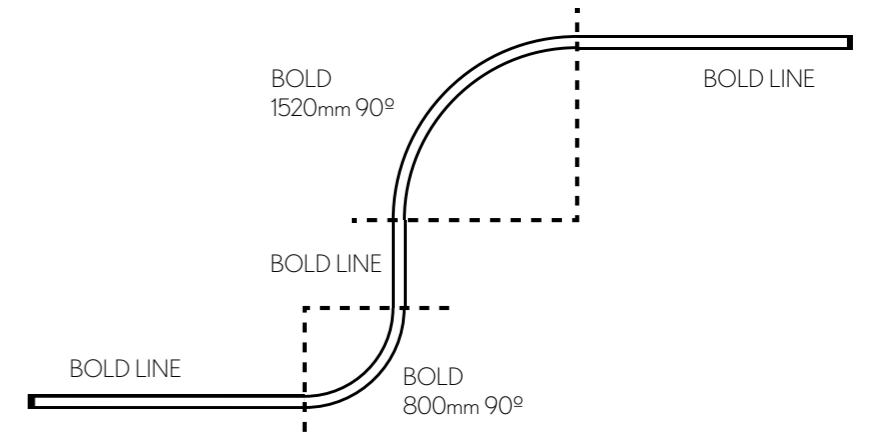


Select lens finishes



BOLD | BOLD LINE

REF 210001.PN | 210015.PN | 210001.SR | 210015.SR

PHOTOMETRY




OPAL

INCLUDED (.PN)



SC03.SA
WIRE 3M.

PROFILE



85
65

*1 Down light (direct light) works at 500mA. La luz directa trabaja a 500mA.



FINISHES

● COLORS



DIMENSIONS

● PROFILE LENGTHS mm.

843	1124	1405	1686
800	1520	2950	5100

LIGHTING OPTIONS

■ DIFFUSERS

OPAL

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS


DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

LUMINAIRE INCLUDES

Recessed with frame mounting kit

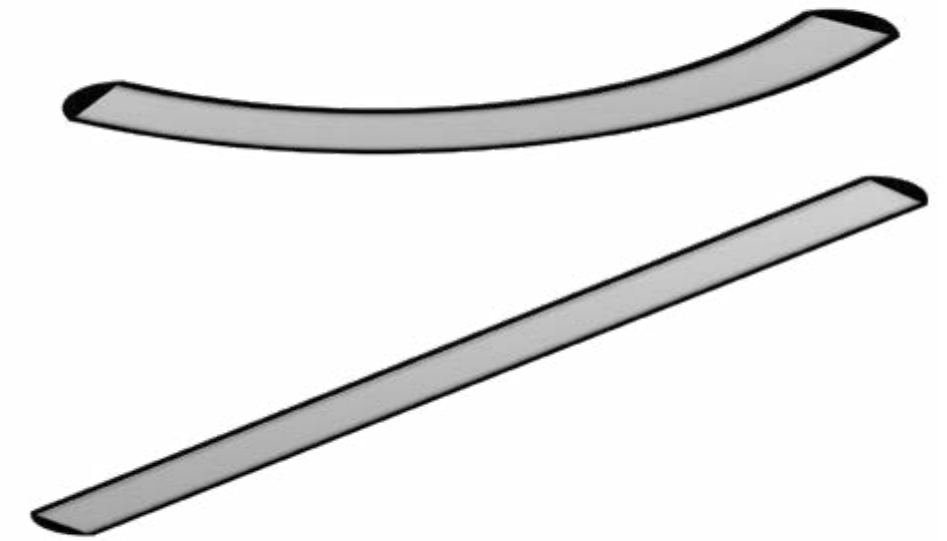

ON DEMAND

Emergency Lighting *
Motion Detection
Well-Certified LED Boards
Taylor your own design
Special Color Temperature
RGB
Wireless Control Options (Casambi)

* Delivered separately
(not installed in luminaire).

INSTALLATIONS

.PN PENDANT

·210001 BOLD ·210015 BOLD LINE | PN
Pag. 254

.SR SURFACE

·210001 BOLD ·210015 BOLD LINE | SR
Pag. 254


.RF RECESSED FRAME

·210001 BOLD ·210015 BOLD LINE | RF
Pag. 460



BOLD | BOLD LINE

REF 210001.RF | 210015.RF

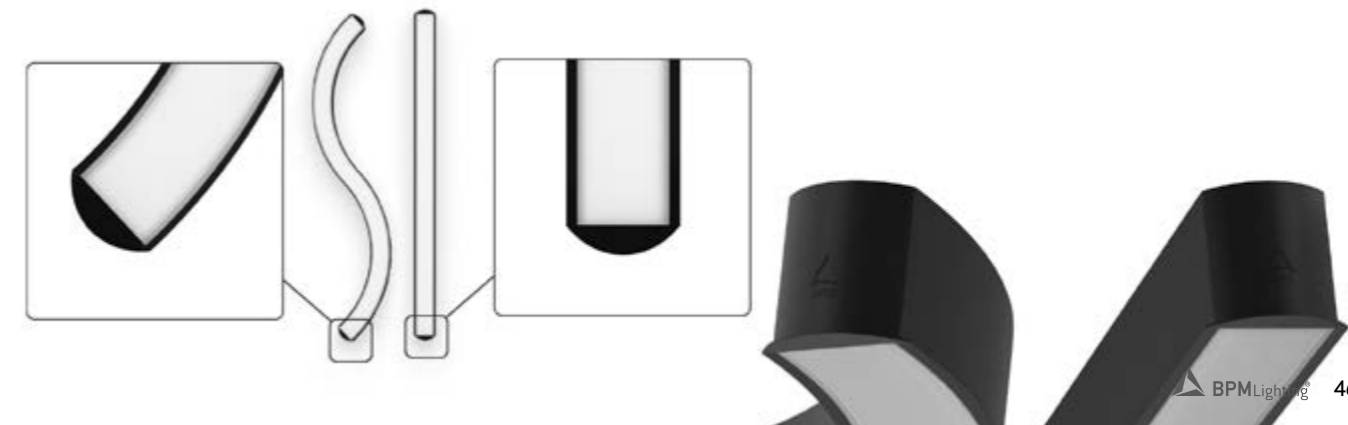

BOLD						
.01	.02	.03	.04	.05	.06	.07
800 mm 45°	800 mm 90°	1520 mm 45°	1520 mm 90°	2950 mm 45°	2950 mm 90°	5100 mm 45°

REF.	DIMENSION ▲	FINISH	DIFFUSER ■	POWER	CRI	DOWNLIGHT *1 LUMEN			WATT	DIMM ▼
						.27	.30	.40		
210001	.01	●	.OP	.ST	.9	765	795	825	6	.DA .PU .D1
	.02					1530	1590	1650	12	
	.03					1530	1590	1650	12	
	.04					3060	3180	3300	24	
	.05					3060	3180	3300	24	
	.06					6120	6360	6600	47	
	.07					5355	5565	5775	41	

REF.	DIMENSION ▲	FINISH	DIFFUSER ■	POWER	CRI	DOWNLIGHT *1 LUMEN			WATT	DIMM ▼
						.27	.30	.40		
210001	.01	●	.OP	.HI	.9	1530	1589	1652	12	.DA .PU .D1
	.02					3060	3178	3304	24	
	.03					3060	3178	3304	24	
	.04					6120	6356	6608	47	
	.05					6120	6356	6608	47	
	.06					12240	12712	13216	94	
	.07					10710	11123	11564	83	

Reference order | 210001.XX.RF.XX.XX.XX.9.XX.XX

BOLD LINE	REF.	DIMENSION		FINISH	DIFFUSER ■	POWER	CRI	DOWNLIGHT *1 LUMEN			WATT	DIMM ▼
		▲	MM					.27	.30	.40		
	210015	●	.OP .MP	.ST	.9	.03	863	2295	2385	2475	18	.DA .PU .D1
						.04	1144	3060	3180	3300	24	
						.05	1425	3825	3975	4125	30	
						.06	1706	4590	4770	4950	35	

BOLD LINE	REF.	DIMENSION		FINISH	DIFFUSER ■	POWER	CRI	DOWNLIGHT *1 LUMEN			WATT	DIMM ▼
		▲	MM					.27	.30	.40		
	210015	●	.OP .MP	.ST	.9	.03	863	4590	4767	4956	35	.DA .PU .D1
						.04	1144	6120	6356	6608	47	
						.05	1425	7650	7945	8260	59	
						.06	1706	9180	9534	9912	71	

Reference order | 210015.XX.SR.XX.XX.XX.9.XX.XX

COMPONENTS

COVERT KIT	REF.
	TF17

Reference order | TF17.RF.XX


Select finish



BOLD | BOLD LINE

REF 210001.RF | 210015.RF

PHOTOMETRY




OPAL

INCLUDED



RF INSTALLATION KIT

PROFILE



76

RECESSED FRAME