

new

FINISHES

● COLORS



DIMENSIONS

◆ PROFILE LENGTHS mm.

843 | 1124 | 1405 | 1686 | 1967 | 2248

LIGHTING OPTIONS

■ DIFFUSERS

OPAL

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K | TW

▼ DIMMABLE OPTIONS



DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN

LUMINAIRE INCLUDES

Surface mounting kit

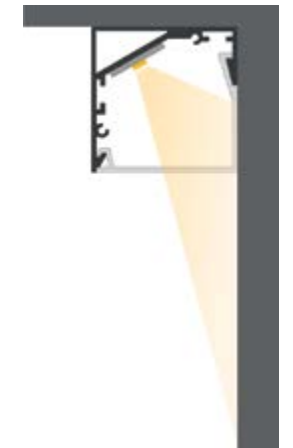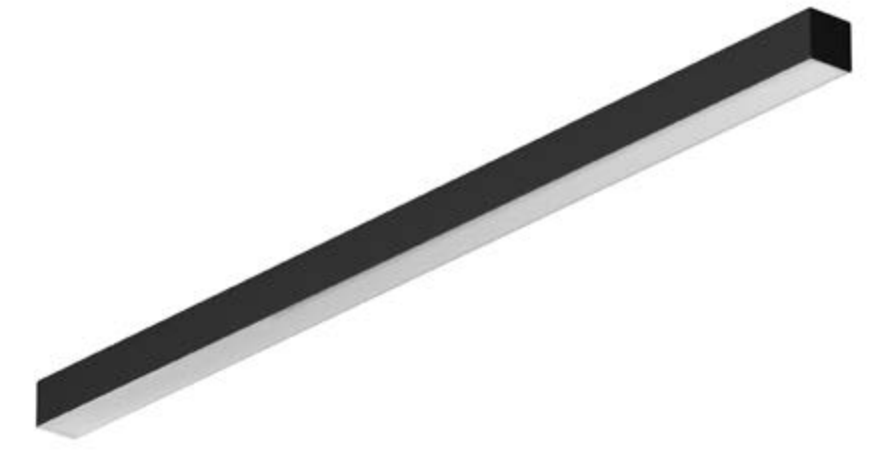

ON DEMAND


Emergency Lighting*
Motion Detection
Custom dimensions
Special Color Temperature
RGB
Thematic LED
Wireless Control Options (Casambi)
CRI 80



* Delivered separately
(not installed in luminaire).

.SR
SURFACE

INSTALLATIONS

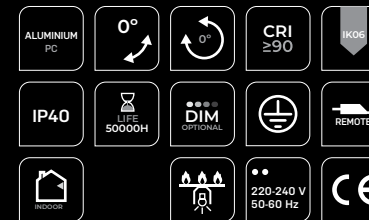


EDGE

REF 210014.SR

.SR
SURFACE

·210014 EDGE | SR
Pag. 222

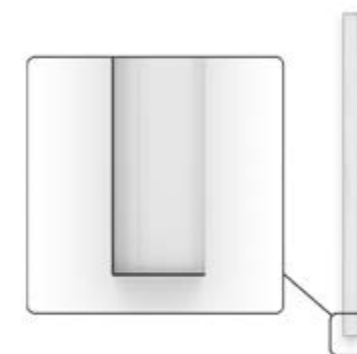

REF.	PROFILE LENGTH		FINISH	DIFFUSER	POWER	CRI	DOWNLIGHT *2 LUMEN				WATT		DIMM
	MM	MM					.27	.30	.40	.TW *1	K	TW	
210014	.03	843	●	.OP	.ST	.9	2295	2385	2475	5700-5910	18	38	.DA .PU .D1
	.04	1124					3060	3180	3300	7600-7880	24	51	
	.05	1405					3825	3975	4125	9500-9850	30	64	
	.06	1686					4590	4770	4950	11400-11820	35	76	
	.07	1967					5355	5565	5775	13300-13790	41	89	
	.08	2248					6120	6360	6600	15200-15760	47	102	

Reference order | 210014.XX.SR.XX.XX.XX.9.XX.XX



Total length = Profile length + 20mm + 2x2mm (Cover kit)

COMPONENTS


COVER KIT	REF.	FINISH
	TF08 2x2mm.	●

Reference order | TF08.SR.XX

JOINTS

LINEAR JOINT
UR08

Select finishes



- ALUMINIUM PC
- 0°
- 0°
- CRI ≥90
- IK05
- IP40
- LIFE 50000H
- DIM OPTIONAL
- REMOTE
- RECOOL
- 220-240 V 50-60 Hz
- CE

EDGE

REF 210014.SR


PHOTOMETRY

INCLUDED



SR INSTALLATION KIT

PROFILE



SURFACE .SR