



FINISHES

● PROFILE COLORS



● EYE COLORS



DIMENSIONS

● LENGTHS

1m

LIGHTING OPTIONS

■ DIFFUSERS

ACRYLIC

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K |

▼ DIMMABLE OPTIONS

▲ LIGHT DISTRIBUTION

DOWN

LUMINAIRE INCLUDES

.PN

2 x Suspension cables 3m (each 2m)
NON-DIM DOWN: 1 x Feed Hose 3 x 0,75mm²

.SR

Surface mounting kit



SOON

.SR
.PN

PENDANT | SURFACE

INSTALLATIONS



EYE

REF 210016.PN | 210016.SR

.PN
PENDANT


·210016 EYE|PN
Pag. 158

.SR
SURFACE

·210016 EYE|SR
Pag. 158

.TR
TRIMLESS

·210016 EYE|TR
Pag. 610

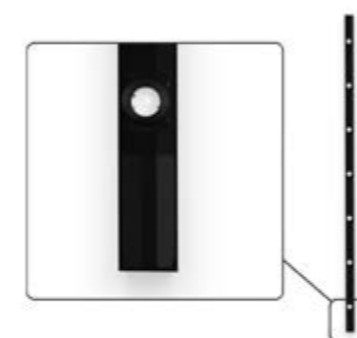

EYE	REF.	DIMENSION	FINISH	SKETCH
	210016	.01 1m.	.BK-BK .WH-WH	

Reference order | 210016.XX | .SR | .PN | .XX

48V TRANSFORMER	DIMENSION	WATT
DR48	.01	75
	.02	120
	.03	200

Reference order | DR48.XX

EYE MODULE	REF.	DIMENSION	FINISH	OPTIC OPTIONS	POWER	CRI	LUMEN			WATT	VdC	DIMM	SKETCH
	20210	.01	●	.AC	.ST	.9	.27	.30	.40	5	48	-	
							419	474	510				

Reference order | 20210.01.XX.AC.ST.9.XX



OPTIONS (.PN)

SUSPENSION KIT	REF.	DIMENSION	FINISH
	SC05	5M.	.SA
	SC07	7M.	
	SC10	10M.	

Reference order | SCXX.SA

SUSPENSION ROD	REF.	DIMENSIONS	mm	FINISH
	SC21	.60	600	●
		.80	800	
		.100	1000	

Reference order | SC21.XX.XX

BOXES (.PN) Not-included please select

CONNECTION BOX	FINISH
	●
CB09.12	

Reference order | CB09.12.XX

COMPONENTS

COVERT KIT	REF.	FINISH
	TF16	●

Reference order | TF16 | .SR | .PN | .XX


LINEAR JOINT + FLEXIBLE JOINT CONNECTOR	FINISH
	●
	.BK-BK .WH-WH

Reference order | UR16.XX

POWER FEEDER UNIT	FINISH
	●
	.BK-BK .WH-WH

Reference order | ACC210016.CA.XX

Select profile finishes



.WH-WH .BK-BK

Select eye finishes



.WH-WH .BK-BK .GC-GC

- ALUMINUM PC
- 0°
- 0°
- CRI ≥90
- IK05
- IP40
- LIFE 50000H
- DIM OPTIONAL
- REMOTE
- INDOOR
- 220-240 V 50-60 Hz
- CE

EYE

REF 210016.PN | 210016.SR

PHOTOMETRY




OPAL

INCLUDED (.PN)



SC03.SA
WIRE 3M.

PROFILE



53

PENDANT | SURFACE

.SR
.PN



FINISHES

● PROFILE COLORS



● EYE COLORS



DIMENSIONS

● LENGTHS mm.

1m.

LIGHTING OPTIONS

■ DIFFUSERS

ACRYLIC

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K |

▼ DIMMABLE OPTIONS


-

▲ LIGHT DISTRIBUTION


DOWN

LUMINAIRE INCLUDES

Trimless mounting kit

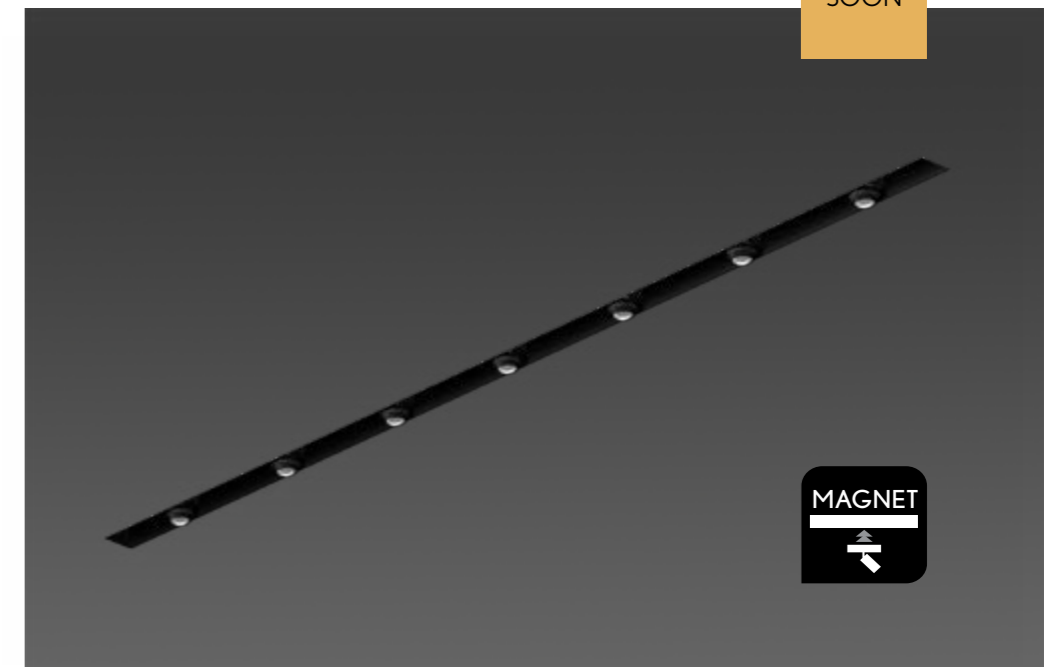

SOON

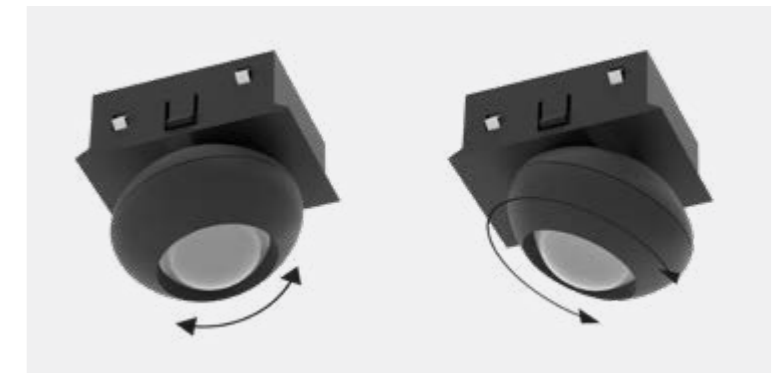

.TR

TRIMLESS

INSTALLATIONS

.PN
PENDANT

·210016 EYE|PN
Pag. 158

.SR
SURFACE

·210016 EYE|SR
Pag. 158


.TR
TRIMLESS



·210016 EYE|TR
Pag. 610



EYE

REF 210016.TR

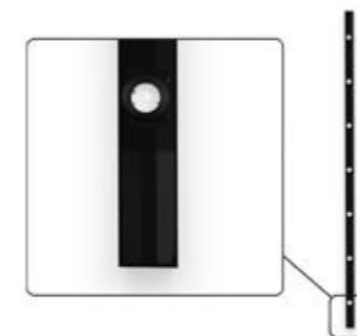



EYE	REF.	DIMENSION	FINISH	SKETCH
	210016	.01	.BK-BK .WH-WH	

Reference order | 210016.XX.TR.XX

48V TRANSFORMER	DIMENSION	WATT
DR48	.01	75
	.02	120
	.03	200


Reference order | DR48.XX

EYE MODULE	REF.	DIMENSION	FINISH	OPTIC OPTIONS	POWER	CRI	LUMEN			WATT	VdC	DIMM	SKETCH
							.27	.30	.40				
	20210	.01	●	.AC	.ST	.9	419	474	510	5	48	-	


Reference order | 20210.01.XX.AC.ST9.XX




COMPONENTS

COVERT KIT	REF.	FINISH
	TF16	●

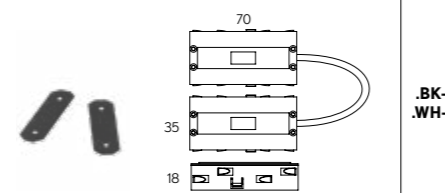


Reference order | TF16.TR.XX

LINEAR JOINT + FLEXIBLE JOINT CONNECTOR	FINISH
	●

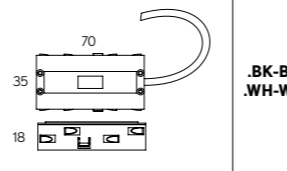
Reference order | UR16.XX

POWER FEEDER UNIT	FINISH
	●

Reference order | ACC210016.CA.XX

 Total length = Profile length + 2x3mm (Cover kit)
 (Total length + 2mm) x 75mm
 75mm

● Select profile finishes



.WH-WH .BK-BK

● Select eye module finishes



.WH-WH .BK-BK .GC-GC



EYE

REF 210016.TR


PHOTOMETRY



OPAL

PROFILE

12,5mm Standard Ceiling

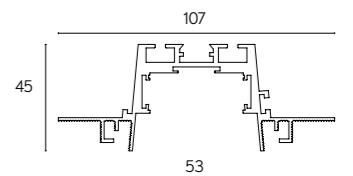

53

.TR

TRIMLESS