



FINISHES

EXTERNAL COLOR



INTERNAL COLOR



DIMENSIONS

DIAMETERS mm. | HEIGHT 114 mm.

450 | 650 | 950 | 1250

LIGHTING OPTIONS

DIFFUSERS

OPAL | MICROPRISMATIC

POWERS

STANDARD

CRI

90

COLOR TEMPERATURES

2700K | 3000K | 4000K

DIMMABLE OPTIONS

DALI | 1.10 | PUSH

LIGHT DISTRIBUTION OPTIONS

DOWN | UP-DOWN

LUMINAIRE INCLUDES

.PN

3 x Suspension cables 3m
 NON-DIM DOWN: 1x Feed Hose 3 x 0,75mm²
 DIM DOWN or NON-DIM DOWN-UP: 1x Feed Hose 5 x 0,75mm²
 DIM DOWN-UP (only): 1x Feed Hose 5 x 0,75mm²
 Connection box CB03 with luminaire's finish

.SR

Surface mounting kit



ON DEMAND

Special RAL Color
 Number of switches
 Emergency Lighting*
 Motion Detection
 Wireless Control Options (Casambi)



* Delivered separately
 (not installed in luminaire).

INSTALLATIONS



FLORIDA

REF 10190.PN | 10190.SR

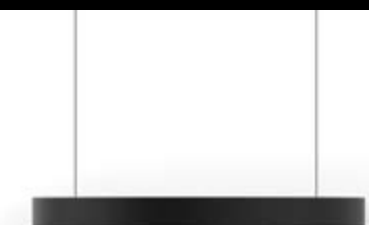

PENDANT | SURFACE
 .SR
 .PN

FLORIDA	REF.	DIMENSION ▲	FINISH	DIFFUSER ■	POWER	CRI	K	DOWNLIGHT			UPLIGHT ▲UP *1		DIMM ▼	SKETCH
								LUMEN	WATT	MA	LUMEN	WATT		
	10190	.45	●	.OP .MP	.ST	.9	.27	4510	45	700	605	9	.DA .PU .D1	
								4900			627			
								5000			797			
	10190	.65	●	.OP .MP	.ST	.9	.27	10824	109	700	901	13	.DA .PU .D1	
								11760			933			
								12000			1186			
	10190	.95	●	.OP .MP	.ST	.9	.27	19844	202	700	1344	20	.DA .PU .D1	
								21560			1392			
								22000			1770			
	10190	.125	●	.OP .MP	.ST	.9	.27	31570	318	700	1787	27	.DA .PU .D1	
								34300			1851			
								35000			2353			

Reference order | 10190.XX | .SR | .PN | .XX.XX | .ST9.XX.XX

OPTIONS (.PN)

CABLE CONCENTRATOR	CONNECTION BOX	REF.	FOR MODEL	FINISH
		CB02	.45 .65	●

Reference order | CBXX.XX

CABLE CONCENTRATOR KIT	CONNECTION BOX	REF.	FOR MODEL	FINISH
		SC22	.45 .65	●

Reference order | SCXX.XX

SUSPENSION KIT	REF.	DIMENSION	FINISH
	SC05	5M.	.SA
	SC07	7M.	
	SC10	10M.	

Reference order | SCXX.SA


CENTRAL ROD SUSPENSION*	CONNECTION BOX	REF.	DIMENSIONS	FINISH
		SC20	.60 600mm	●
			.80 800mm	
			.100 1000mm	

Reference order | SC20.XX.XX

* Luminaire .95 and .125 require 3 rod suspensions. Luminarias .95 y .125 requieren 3 tijas.

*1 Uplight (UP) is only available for ON-OFF and DALI dimmable (.DA) options, both in 24VdC. La luz indirecta está solo disponible para versiones on-off y regulación DALI (.DA), ambas en 24VdC.


• Select finishes

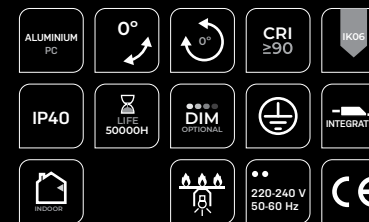


FLORIDA

REF 10190.PN | 10190.SR


SUSPENSION OPTIONS (.PN)

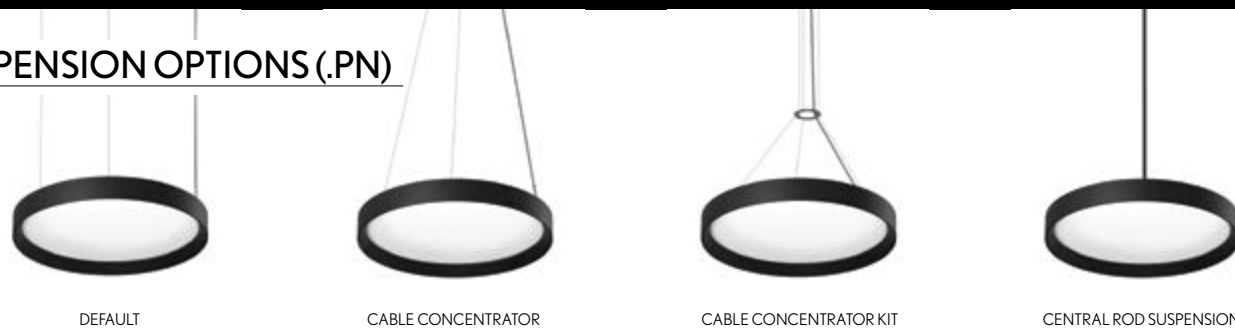


PHOTOMETRY

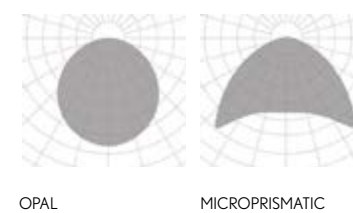

INCLUDED (.PN)

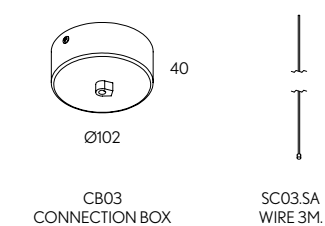

PROFILE



SR
PN
PENDANT | SURFACE



FINISHES

EXTERNAL COLOR



INTERNAL COLOR



DIMENSIONS

DIAMETERS mm.

450 | 650 | 950 | 1250

LIGHTING OPTIONS

DIFFUSERS

OPAL | MICROPRISMATIC

POWERS

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

DIMMABLE OPTIONS

DALI | 1.10 | PUSH

LIGHT DISTRIBUTION OPTIONS

DOWN

LUMINAIRE INCLUDES

Recessed with frame mounting kit




ON DEMAND

Special RAL Color
Number of switches
Emergency Lighting*
Motion Detection
Wireless Control Options (Casambi)

* Accessories are delivered separately
(not installed in luminaire).

RECESSED FRAME

INSTALLATIONS

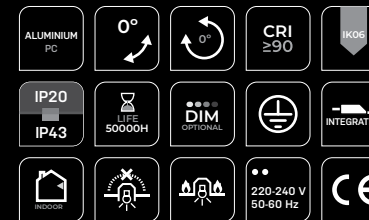

FLORIDA

REF 10190.RF

.PN
PENDANT

·10190 FLORIDA | PN
Pag. 90

.SR
SURFACE


·10190 FLORIDA | SR
Pag. 90

.RF
RECESSED FRAME

·10190 FLORIDA | RF
Pag. 408

.TR
TRIMLESS

·10190 FLORIDA | TR
Pag. 596



FLORIDA	REF.	DIMENSION	FINISH	DIFFUSER	POWER	CRI	K	LUMEN	WATT	mA	DIMM	SKETCH
	10190	.45	●	.OP .MP	.ST	.9	.27	4510	45	700	.DA .PU .D1	
							.30	4900				
							.40	5000				
	10190	.65	●	.OP .MP	.ST	.9	.27	10824	109	700	.DA .PU .D1	
							.30	11760				
							.40	12000				
	10190	.95	●	.OP .MP	.ST	.9	.27	19844	200	700	.DA .PU .D1	
							.30	21560				
							.40	22000				
	10190	.125	●	.OP .MP	.ST	.9	.27	31570	318	700	.DA .PU .D1	
							.30	34300				
							.40	35000				

Reference order | 10190.XX.RF.XX.XX.ST9.XX.XX



RECESSED FRAME


Select finishes




FLORIDA

REF 10190.RF


PHOTOMETRY

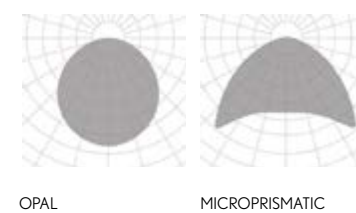

INCLUDED



PROFILE





FINISHES

EXTERNAL COLOR



INTERNAL COLOR



DIMENSIONS

DIAMETERS mm.

450 | 650 | 950 | 1250

LIGHTING OPTIONS

DIFFUSERS

OPAL

MICROPRISMATIC

POWERS

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI

1.10

PUSH

▲ LIGHT DISTRIBUTION OPTIONS

DOWN

LUMINAIRE INCLUDES

Trimless mounting kit




ON DEMAND

Special RAL Color
Number of switches
Emergency Lighting*
Motion Detection
Wireless Control Options (Casambi)

* Accessories are delivered separately
(not installed in luminaire).

TRIMLESS

INSTALLATIONS

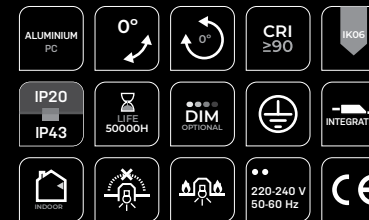

FLORIDA

REF 10190.TR

.PN
PENDANT

-10190 FLORIDA | PN
Pag. 90

.SR
SURFACE

-10190 FLORIDA | SR
Pag. 90

.RF
RECESSED FRAME

-10190 FLORIDA | RF
Pag. 408


.TR
TRIMLESS

-10190 FLORIDA | TR
Pag. 596



FLORIDA	REF.	DIMENSION	FINISH	DIFFUSER	POWER	CRI	K	LUMEN	WATT	mA	DIMM	SKETCH
	10190	.45	●	.OP .MP	.ST	.9	.27	4510	45	700	.DA .PU .D1	
							.30	4900				
							.40	5000				
	10190	.65	●	.OP .MP	.ST	.9	.27	10824	109	700	.DA .PU .D1	
							.30	11760				
							.40	12000				
	10190	.95	●	.OP .MP	.ST	.9	.27	19844	200	700	.DA .PU .D1	
							.30	21560				
							.40	22000				
	10190	.125	●	.OP .MP	.ST	.9	.27	31570	318	700	.DA .PU .D1	
							.30	34300				
							.40	35000				

Reference order | 10190.XX.TR.XX.XX.ST9.XX.XX

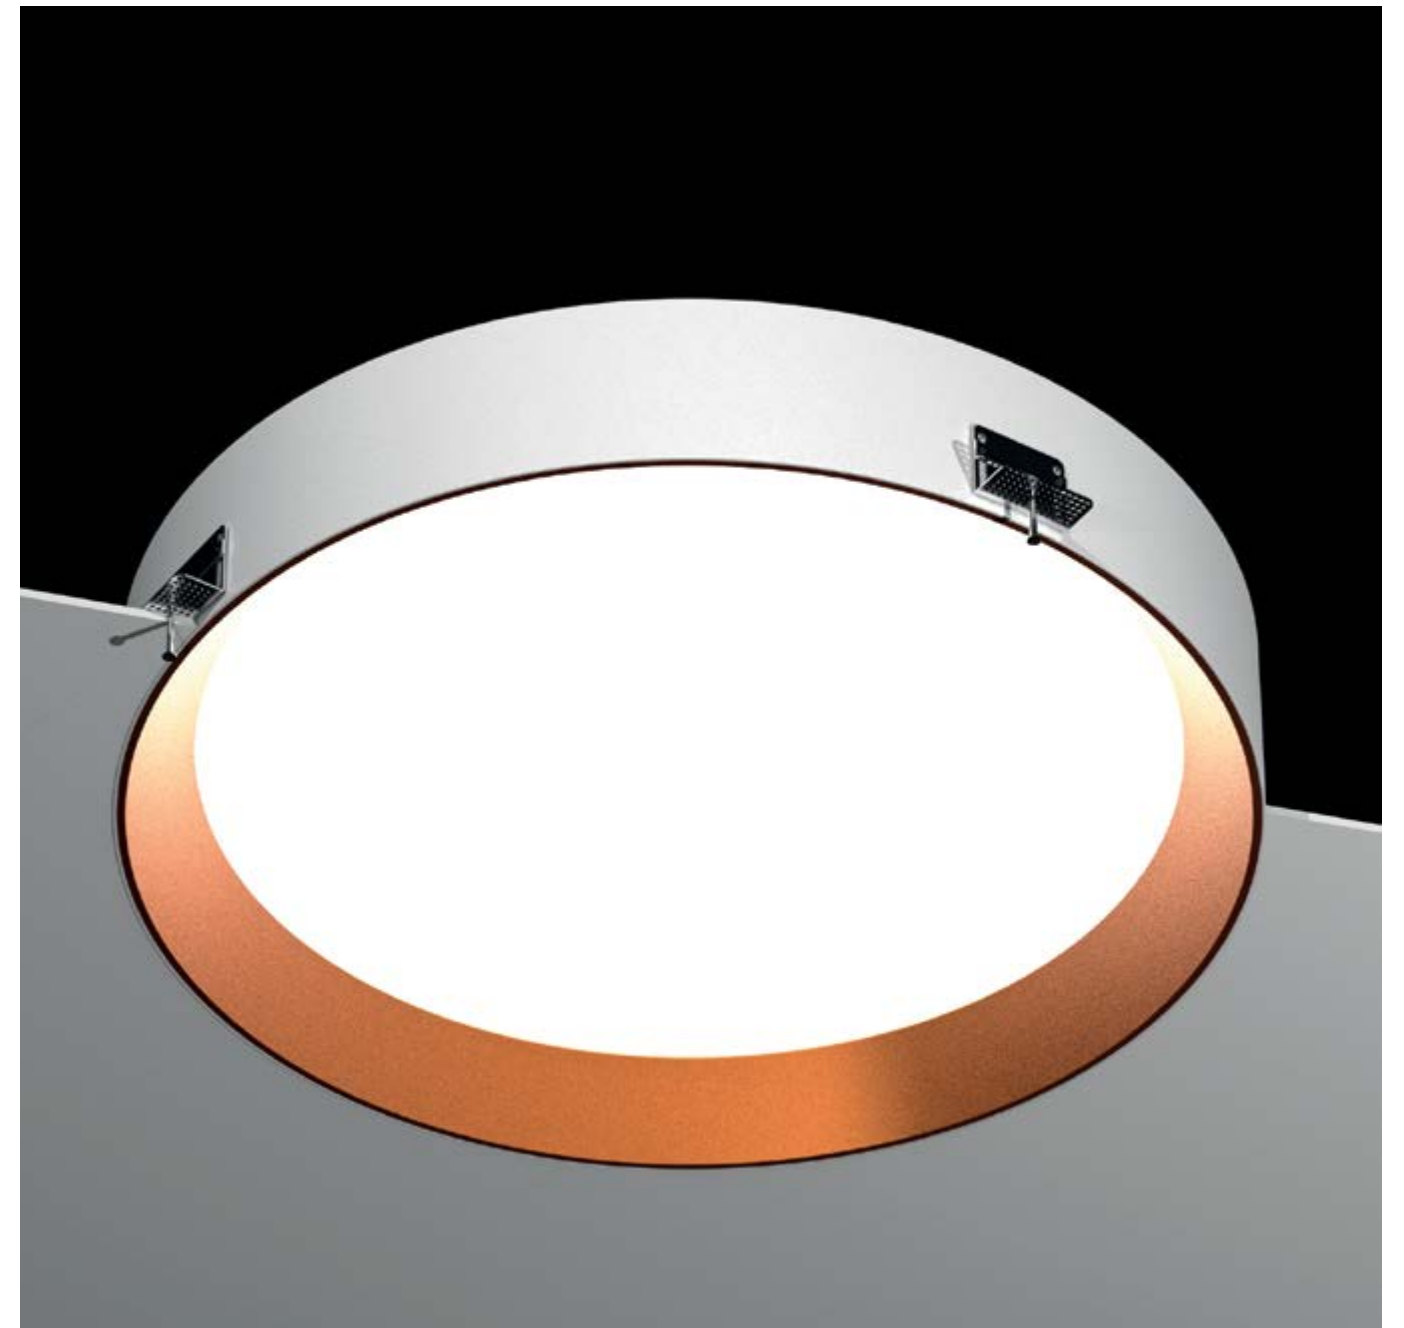

TR
TRIMLESS


Select finishes




FLORIDA

REF 10190.TR

PHOTOMETRY

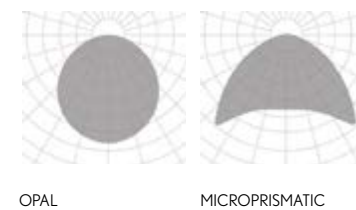

INCLUDED



PROFILE

