



## FINISHES

### ● COLORS



## DIMENSIONS

### ● LENGTHS

PER METER

## COMPONENTS

LED MODULES  
LENSES  
MINI TUBE  
MINI TUBE STICK

### POWER

STANDARD

### CRI

90

### COLOR TEMPERATURE

2700K | 3000K | 4000K

### ▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

### ▲ LIGHT DISTRIBUTION

DOWN

## LUMINAIRE INCLUDES

### .PN

2 x Suspension cables 3m (each 2m)

NON-DIM DOWN: 1 x Feed Hose 3 x 0,75mm<sup>2</sup>

DIM DOWN or NON-DIM DOWN-UP: 1 x Feed Hose 5 x 0,75mm<sup>2</sup>

DIM DOWN-UP (only): 1 x Feed Hose 5 x 0,75mm<sup>2</sup>

### .SR

Surface mounting kit



### ON DEMAND

Special Shapes  
Emergency Lighting\*  
Motion Detection  
Custom dimensions  
Special RAL Color  
Tunable White  
Up Light

\* Delivered separately  
(not installed in luminaire).

## INSTALLATIONS



# MODULIGHT

REF 10210.PN | 10210.SR



.PN  
PENDANT

·10210 MODULIGHT | PN  
Pag. 196




.SR  
SURFACE

·10210 MODULIGHT | SR  
Pag. 196




.RF  
RECESSED FRAME

·10210 MODULIGHT | RF  
Pag. 434



.TR  
TRIMLESS

·10210 MODULIGHT | TR  
Pag. 634

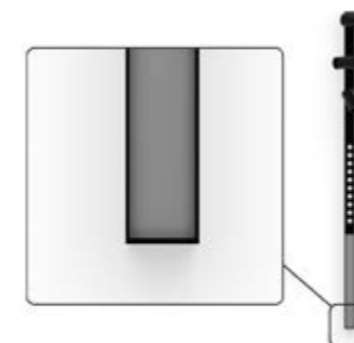

MODULIGHT	REF.	DIMENSION	FINISH	SKETCH
	10210	.01 1m	●	

Reference order | 10210.XX | .SR | .PN | .XX

DRIVER	DIMENSION*1	DIMM
DR10210	.01 0 - 15 W	.DA .PU .D1
	.02 16 - 30 W	
	.03 31 - 65 W	
	.04 66 - 90 W	

Reference order | DR10210.XX.XX

MINI TUBE	REF.	DIMENSION	FINISH	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	mA	SKETCH
	11526	.01	.BK-BK .WH-WH	.15 .24 .38	.ST	.9	.27	348	8	700	
							.30	362			
							.40	421			

Reference order | 11526.01.XX.XX.ST9.XX

MINI TUBE STICK	REF.	DIMENSION	FINISH	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	mA	SKETCH
	11538	.01	.BK-BK .WH-WH	.15 .24 .38	.ST	.9	.27	348	8	700	
							.30	362			
							.40	421			

Reference order | 11538.01.XX.XX.ST9.XX

Modular system that requires a technical drawing




\*1 Driver power must be at least 15% higher than the sum of the power of selected LED modules. *La potencia del driver deber ser por lo menos un 15% mayor que la suma de la potencia de los modulos LED elegidos.*

LENSES	REF.	DIMENSIONS	SHAPE	FINISH	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	mA	SKETCH
	11525	.01 29mm.	.RD .SQ	●	.20 .40 .60	.ST	.9	.27	142	2	700	
								.30	161			
								.40	212			
	11525	.03 80mm.	.RD .SQ	●	.20 .40 .60	.ST	.9	.27	426	6	700	
								.30	483			
								.40	636			
	11525	.05 133mm.	.RD .SQ	●	.20 .40 .60	.ST	.9	.27	710	10	700	
								.30	805			
								.40	1060			
	11525	.10 263mm.	.RD .SQ	●	.20 .40 .60	.ST	.9	.27	1420	20	700	
								.30	1611			
								.40	2120			

Reference order | 11525.XX.XX.XX.XX.ST9.XX

COVERT	REF.	FINISH
	ACC10210.01	.WH-WH .BK.BK

Reference order | ACC10210.01.XX



• Select lens finishes




- ALUMINIUM PC
- 0°
- 0°
- CRI ≥90
- IK05
- IP40
- LIFE 50000H
- DIM OPTIONAL
- INTEGRATED
- RECOOL
- 220-240 V 50-60 Hz
- CE


# MODULIGHT

REF 10210.PN | 10210.SR


## PHOTOMETRY

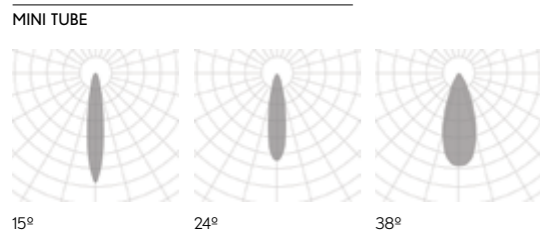


## PHOTOMETRY

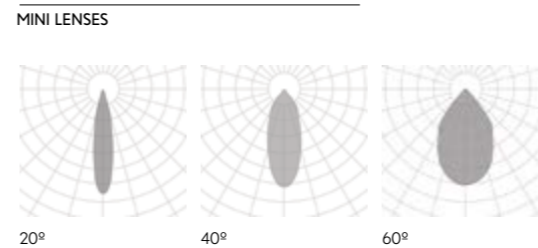

## INCLUDED (.PN)



## PROFILE



PENDANT | SURFACE

LED MODULES	REF.	DIMENSION ▲	DIFFUSER ■	POWER	CRI	K	LUMEN	WATT	mA	SKETCH
	11524	.01 281mm.	.OP .MP	.HI	.9	.27	953	12	700	
						.30	972			
						.40	1141			
	11524	.02 562mm.	.OP .MP	.HI	.9	.27	1906	24	700	
						.30	1944			
						.40	2282			
	11524	.03 843mm.	.OP .MP	.HI	.9	.27	2859	36	700	
						.30	2916			
						.40	3423			
	11524	.04 1124mm.	.OP .MP	.HI	.9	.27	3812	48	700	
						.30	3888			
						.40	4564			
	11524	.05 1405mm.	.OP .MP	.HI	.9	.27	4765	60	700	
						.30	4860			
						.40	5705			
	11524	.06 1686mm.	.OP .MP	.HI	.9	.27	5718	72	700	
						.30	5832			
						.40	6846			

Reference order | **11524.XX.XX.HI.9.XX**

## COMPONENTS

COVERT KIT	REF.	FINISH
	TF23	●

Reference order | TF23.SR.PN.XX

## BOXES (.PN) Not-included please select:

CONNECTION BOX
CB09.12

Reference order | CB09.12.XX

## JOINTS

LINEAR JOINT	ANGLE JOINT	T-JOINT	CROSS JOINT	WALL-CEILING JOINT	FINISH
		X	X		●
UR23	UL23	X	X	UV23	

Reference order | XX23.SR.PN.XX

Select finishes




# MODULIGHT

REF 10210.PN | 10210.SR

## PHOTOMETRY


LED MODULES

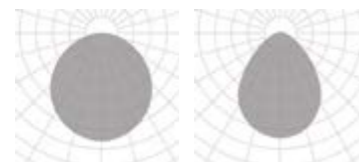

OPAL


MICROPRISMATIC

## INCLUDED (.PN)



SC03.SA  
WIRE 3M.

## PROFILE



PENDANT | SURFACE

.SR  
.PN

PENDANT | SURFACE



## FINISHES

### ● COLORS



## DIMENSIONS

### ● LENGTHS

PER METER

## COMPONENTS

LED MODULES  
LENSES  
MINI TUBE  
MINI TUBE STICK

### POWER

STANDARD

### CRI

90

### COLOR TEMPERATURE

2700K | 3000K | 4000K

### ▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

### ▲ LIGHT DISTRIBUTION

DOWN

## LUMINAIRE INCLUDES

Recessed with frame mounting kit



### ON DEMAND

Special Shapes  
Emergency Lighting\*  
Motion Detection  
Taylor your own design  
Special RAL Color  
Tunable White

\* Delivered separately  
(not installed in luminaire).

## INSTALLATIONS



# MODULIGHT

REF 10210.RF



.PN  
PENDANT

·10210 MODULIGHT | PN  
Pag. 196



.SR  
SURFACE

·10210 MODULIGHT | SR  
Pag. 196




.RF  
RECESSED FRAME



·10210 MODULIGHT | RF  
Pag. 434



.TR  
TRIMLESS

·10210 MODULIGHT | TR  
Pag. 634

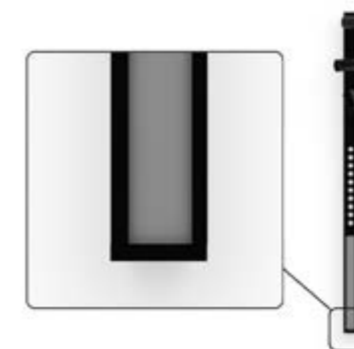



MODULIGHT	REF.	DIMENSION	FINISH	SKETCH
	10210	.01 1m	●	



Reference order | 10210.XX.RF.XX

DRIVER	DIMENSION*1	DIMM
DR10210	.01 0 - 15 W	.DA .PU .D1
	.02 16 - 30 W	
	.03 31 - 65 W	
	.04 66 - 90 W	


Reference order | DR10210.XX.XX

MINI TUBE	REF.	DIMENSION	FINISH	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	mA	SKETCH
	11526	.01	.BK-BK .WH-WH	.15 .24 .38	.ST	.9	.27	348	8	700	
							.30	362			
							.40	421			

Reference order | 11526.01.XX.XX.ST9.XX

MINI TUBE STICK	REF.	DIMENSION	FINISH	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	mA	SKETCH
	11538	.01	.BK-BK .WH-WH	.15 .24 .38	.ST	.9	.27	348	8	700	
							.30	362			
							.40	421			






Reference order | 11538.01.XX.XX.ST9.XX

 Modular system that requires a technical drawing

\*1 Driver power must be at least 15% higher than the sum of the power of selected LED modules. *La potencia del driver deber ser por lo menos un 15% mayor que la suma de la potencia de los modulos LED elegidos.*

• Select lens finishes






LENSES	REF.	DIMENSIONS	SHAPE	FINISH	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	mA	SKETCH
	11525	.01 29mm.	.RD .SQ	●	.20 .40 .60	.ST	.9	.27	142	2	700	
								.30	161			
								.40	212			
	11525	.03 80mm.	.RD .SQ	●	.20 .40 .60	.ST	.9	.27	426	6	700	
								.30	483			
								.40	636			
	11525	.05 133mm.	.RD .SQ	●	.20 .40 .60	.ST	.9	.27	710	10	700	
								.30	805			
								.40	1060			
	11525	.10 263mm.	.RD .SQ	●	.20 .40 .60	.ST	.9	.27	1420	20	700	
								.30	1611			
								.40	2120			

Reference order | 11525.XX.XX.XX.XX.ST9.XX

COVER	REF.	FINISH
	ACC10210.01	.WH-WH .BK-BK

Reference order | ACC10210.01.XX




# MODULIGHT

REF 10210.RF


## PHOTOMETRY

MINI TUBE

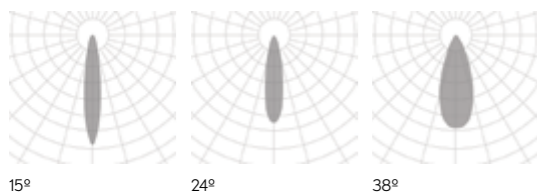

## PHOTOMETRY

LENSES

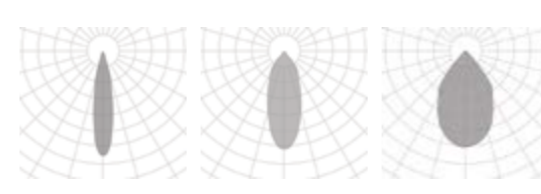

RECESSED FRAME

.RF

LED MODULES	REF.	DIMENSION ▲	DIFFUSER ■	POWER	CRI	K	LUMEN	WATT	mA	SKETCH
	11524	.01 281mm.	.OP .MP	.HI	.9	.27	953	12	700	
						.30	972			
						.40	1141			
	11524	.02 562mm.	.OP .MP	.HI	.9	.27	1906	24	700	
						.30	1944			
						.40	2282			
	11524	.03 843mm.	.OP .MP	.HI	.9	.27	2859	36	700	
						.30	2916			
						.40	3423			
	11524	.04 1124mm.	.OP .MP	.HI	.9	.27	3812	48	700	
						.30	3888			
						.40	4564			
	11524	.05 1405mm.	.OP .MP	.HI	.9	.27	4765	60	700	
						.30	4860			
						.40	5705			
	11524	.06 1686mm.	.OP .MP	.HI	.9	.27	5718	72	700	
						.30	5832			
						.40	6846			

Reference order 11524.XX.XX.HI.9.XX

## COMPONENTS

COVER KIT	REF.	FINISH
	TF23	●

Reference order TF23.RF.XX

## JOINTS

LINEAR JOINT	ANGLE JOINT	T-JOINT	CROSS JOINT	WALL-CEILING JOINT	FINISH
		X	X		●
UR23	UL23	X	X	UV23	

Reference order XX23.RF.XX

• Select finish




# MODULIGHT

REF 10210.RF

## PHOTOMETRY

LED MODULES

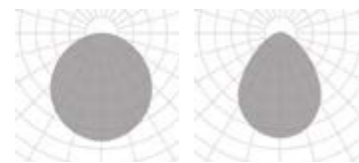

OPAL


MICROPRISMATIC

## INCLUDED



RF INSTALLATION KIT

## PROFILE



.RF

RECESSED FRAME



## FINISHES

### ● COLORS



## DIMENSIONS

### ● LENGTHS

PER METER

## COMPONENTS

LED MODULES  
LENSES  
MINI TUBE  
MINI TUBE STICK

### POWER

STANDARD

### CRI

90

### COLOR TEMPERATURE

2700K | 3000K | 4000K

### ▼ DIMMABLE OPTIONS


DALI | 1.10 | PUSH

### ▲ LIGHT DISTRIBUTION

DOWN

## LUMINAIRE INCLUDES

Trimless mounting kit

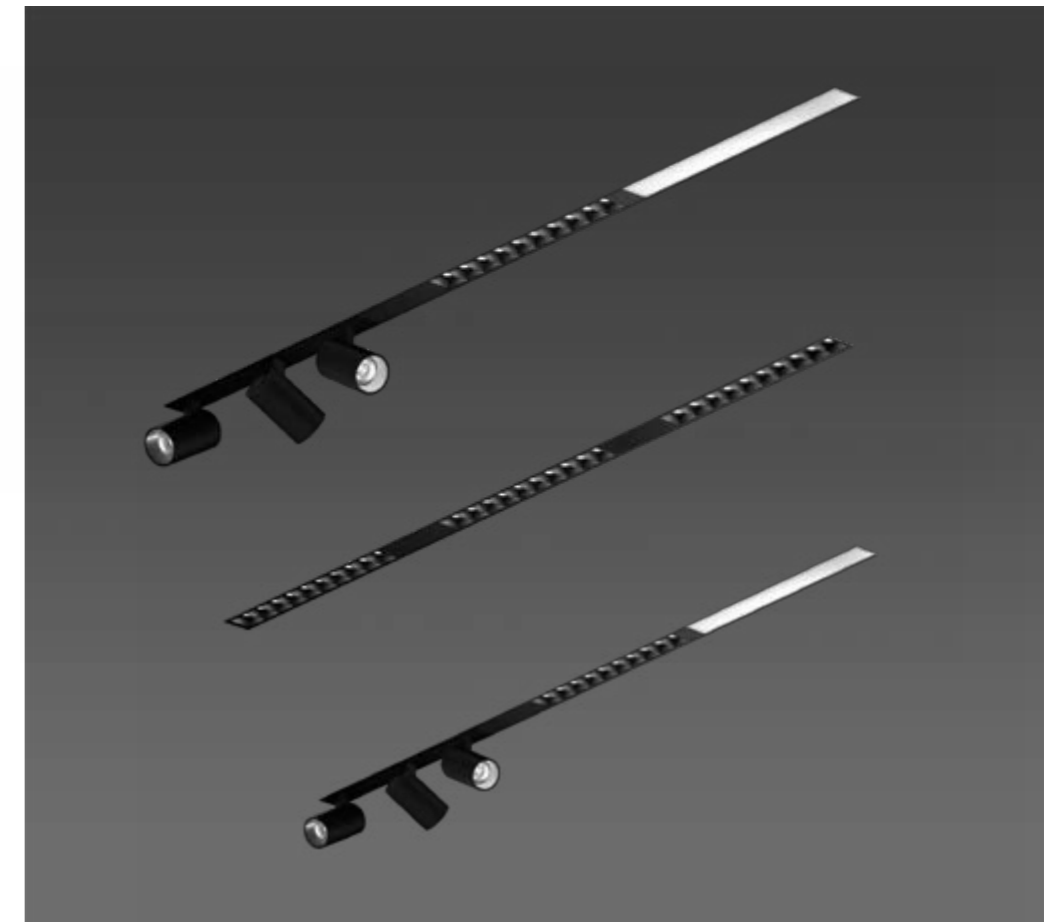

### ON DEMAND

Special Shapes  
Emergency Lighting\*  
Motion Detection  
Custom dimensions  
Special RAL Color  
Tunable White

\* Delivered separately  
(not installed in luminaire).

## INSTALLATIONS



.PN  
PENDANT

·10210 MODULIGHT | PN  
Pag. 196



.SR  
SURFACE

·10210 MODULIGHT | SR  
Pag. 196



.RF  
RECESSED FRAME

·10210 MODULIGHT | RF  
Pag. 434




.TR  
TRIMLESS

·10210 MODULIGHT | TR  
Pag. 634



# MODULIGHT

REF 10210.TR

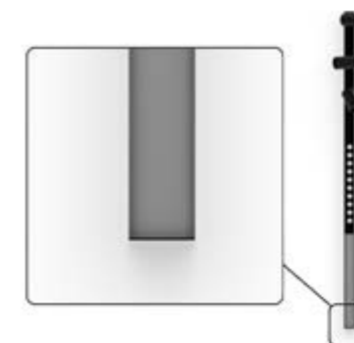

MODULIGHT	REF.	DIMENSION	FINISH	SKETCH
	10210	.01 1m	●	

Reference order | 10210.XX.TR.XX

DRIVER	DIMENSION*1	DIMM
DR10210	.01 0 - 15 W	.DA .PU .D1
	.02 16 - 30 W	
	.03 31 - 65 W	
	.04 66 - 90 W	

Reference order | DR10210.XX.XX

MINI TUBE	REF.	DIMENSION	FINISH	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	mA	SKETCH
	11526	.01	.BK-BK .WH-WH	.15 .24 .38	.ST	.9	.27	348	8	700	
							.30	362			
							.40	421			

Reference order | 11526.01.XX.XX.ST9.XX

MINI TUBE STICK	REF.	DIMENSION	FINISH	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	mA	SKETCH
	11538	.01	.BK-BK .WH-WH	.15 .24 .38	.ST	.9	.27	348	8	700	
							.30	362			
							.40	421			

Reference order | 11538.01.XX.XX.ST9.XX

Modular system that requires a technical drawing

\*1 Driver power must be at least 15% higher than the sum of the power of selected LED modules. *La potencia del driver deber ser por lo menos un 15% mayor que la suma de la potencia de los modulos LED elegidos.*

• Select finish






LENSES	REF.	DIMENSIONS	SHAPE	FINISH	OPTIC OPTIONS	POWER	CRI	K	LUMEN	WATT	mA	SKETCH
	11525	.01 29mm.	.RD .SQ	●	.20 .40 .60	.ST	.9	.27	142	2	700	
								.30	161			
								.40	212			
	11525	.03 80mm.	.RD .SQ	●	.20 .40 .60	.ST	.9	.27	426	6	700	
								.30	483			
								.40	636			
	11525	.05 133mm.	.RD .SQ	●	.20 .40 .60	.ST	.9	.27	710	10	700	
								.30	805			
								.40	1060			
	11525	.10 263mm.	.RD .SQ	●	.20 .40 .60	.ST	.9	.27	1420	20	700	
								.30	1611			
								.40	2120			

Reference order | 11525.XX.XX.XX.XX.ST9.XX

COVER	REF.	FINISH
	ACC10210.01	.WH-WH .BK-BK

Reference order | ACC10210.01.XX




# MODULIGHT

REF 10210.TR

## PHOTOMETRY

MINI TUBE

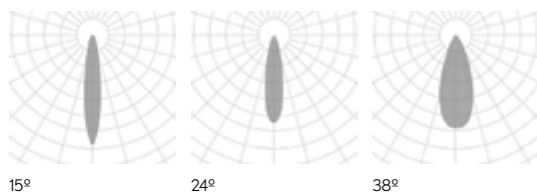


## PHOTOMETRY

MINI LENSES



## PROFILE

12,5mm Standard Ceiling





LED MODULES	REF.	DIMEN- SION ▲	DIFFUSER ■	POWER	CRI	K	LUMEN	WATT	mA	SKETCH
	11524	.01 281mm.	.OP .MP	.HI	.9	.27	953	12	700	
						.30	972			
						.40	1141			
	11524	.02 562mm.	.OP .MP	.HI	.9	.27	1906	24	700	
						.30	1944			
						.40	2282			
	11524	.03 843mm.	.OP .MP	.HI	.9	.27	2859	36	700	
						.30	2916			
						.40	3423			
	11524	.04 1124mm.	.OP .MP	.HI	.9	.27	3812	48	700	
						.30	3888			
						.40	4564			
	11524	.05 1405mm.	.OP .MP	.HI	.9	.27	4765	60	700	
						.30	4860			
						.40	5705			
	11524	.06 1686mm.	.OP .MP	.HI	.9	.27	5718	72	700	
						.30	5832			
						.40	6846			

Reference order 11524.XX.XX.HI.9.XX

## COMPONENTS

COVER KIT	REF.	FINISH
	TF23	●

Reference order TF23.TR.XX

## JOINTS

LINEAR JOINT	ANGLE JOINT	T-JOINT	CROSS JOINT	WALL-CEILING JOINT	FINISH
		X	X		●
UR23	UL23	X	X	UV23	

Reference order XX23.TR.XX

● Select finish




# MODULIGHT

REF 10210.TR

## PHOTOMETRY

LED MODULES

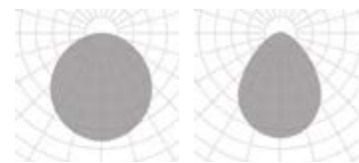


OPAL

MICROPRISMATIC

## PROFILE

12,5mm Standard Ceiling



120