

new



### FINISHES

#### ● COLORS



### DIMENSIONS

#### ● DIAMETERS mm. | HEIGHT 78 mm.

350 | 450 | 650 | 950 | 1250

### LIGHTING OPTIONS

#### ■ DIFFUSERS

OPAL | MICROPRISMATIC

#### POWERS

STANDARD

#### CRI

90

#### COLOR TEMPERATURES

2700K | 3000K | 4000K

#### ▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

#### ▲ LIGHT DISTRIBUTION OPTIONS

DOWN | UP-DOWN

### LUMINAIRE INCLUDES

#### .PN

3 x Suspension cables 3m  
NON-DIM DOWN: 1 x Feed Hose 3 x 0,75mm<sup>2</sup>  
NON-DIM DOWN-UP: 1 x Feed Hose 5 x 0,75mm<sup>2</sup> (Ø350 / Ø450 - 2 x Feed Hose 3 x 0,75mm<sup>2</sup>)  
DIM DOWN: 1 x Feed Hose 5 x 0,75mm<sup>2</sup> (Ø250 - 1 x Feed Hose 3 x 0,75mm<sup>2</sup>)  
DIM DOWN-UP: 1 x Feed Hose 5 x 0,75mm<sup>2</sup> (Ø350 / Ø450 - 1 x Feed Hose 3 x 0,75mm<sup>2</sup>)  
Connection box CB03 with luminaire's finish

#### .SR

Surface mounting kit



#### ON DEMAND

Special Color Temperature  
Number of switches  
Emergency Lighting\*  
Motion Detection  
Wireless Control Options (Casambi)

\* Delivered separately  
(not installed in luminaire).

PENDANT | SURFACE

## INSTALLATIONS



# OHIO

REF 10188.PN | 10188.SR

**.PN**  
PENDANT

·10188 OHIO | PN  
Pag. 86

**.SR**  
SURFACE

·10188 OHIO | SR  
Pag. 86

**.RF**  
RECESSED FRAME

·10188 OHIO | RF  
Pag. 400

**.TR**  
TRIMLESS

·10188 OHIO | TR  
Pag. 588



OHIO	REF.	DIMENSION	FINISH	DIFFUSER	POWER	CRI	K	DOWNLIGHT			UPLIGHT ▲ Up *1*2		DIMM ▼	SKETCH
								LUMEN	WATT	mA	LUMEN	WATT		
	10188	.35	●	.OP .MP	.ST	.9	.27	2416	19	250	458	7	.DA .PU .D1	
								2392			474			
								2697			603			
	10188	.45	●	.OP .MP	.ST	.9	.27	4832	37	250	605	10	.DA .PU .D1	
								4784			627			
								5394			797			
	10188	.65	●	.OP .MP	.ST	.9	.27	10572	82	250	901	13	.DA .PU .D1	
								10704			933			
								12484			1186			
	10188	.95	●	.OP .MP	.ST	.9	.27	21598	153	250	1344	20	.DA .PU .D1	
								21976			1392			
								25816			1770			
	10188	.125	●	.OP .MP	.ST	.9	.27	36308	252	250	1787	27	.DA .PU .D1	
								36848			1851			
								43124			2353			

Reference order | 10188.XX .SR .PN .XX.XX .ST9.XX.XX

## OPTIONS (.PN)

CABLE CONCENTRATOR	CONNECTION BOX	REF.	FOR MODEL	FINISH
		CB10	.25 .35	●

Reference order | CBXX.XX

CABLE CONCENTRATOR KIT	CONNECTION BOX	REF.	FOR MODEL	FINISH
		SC21	.25 .35	●

Reference order | SCXX.XX

SUSPENSION KIT	REF.	DIMENSION	FINISH
	SC05	5M.	.SA
	SC07	7M.	
	SC10	10M.	

Reference order | SCXX.SA

CENTRAL ROD SUSPENSION*	CONNECTION BOX	REF.	DIMENSIONS	FINISH
		SC20	.60 600mm	●
			.80 800mm	
			.100 1000mm	

Luminaire .95 and .125 require 3 rod suspensions.  
Luminarias .95 y .125 requieren 3 tijas.

Reference order | SC20.XX.XX

\*1 Uplight (UP) is only available for ON-OFF and DALI dimmable (.DA) options, both in 24VdC. La luz indirecta está solo disponible para versiones on-off y regulación DALI (.DA), ambas en 24VdC.  
\*2 Remote Driver for uplight. Driver en remoto para luz indirecta.


• Select finishes




# OHIO

REF 10188.PN | 10188.SR


## SUSPENSION OPTIONS (.PN)

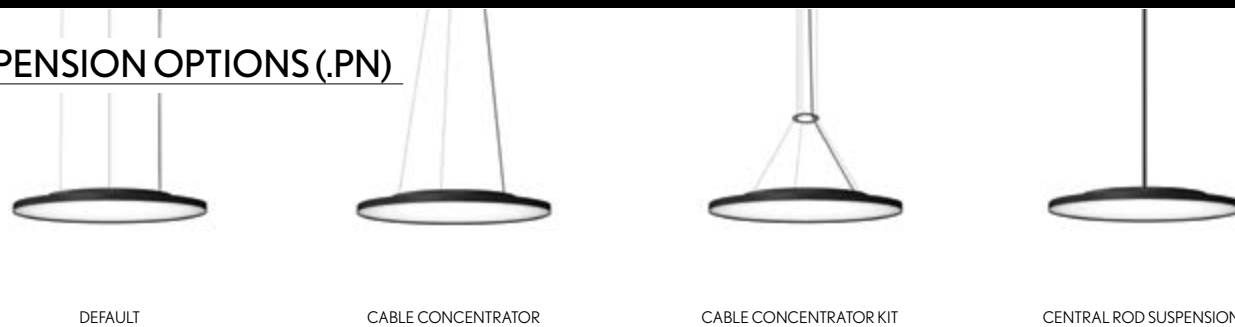


## PHOTOMETRY

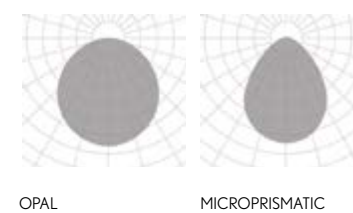

## INCLUDED (.PN)



## PROFILE



SR .PN PENDANT | SURFACE



## FINISHES

### ● COLORS



## DIMENSIONS

### ● DIAMETERS mm.

350 | 450 | 650 | 950 | 1250

## LIGHTING OPTIONS

### ■ DIFFUSERS

OPAL | MICROPRISMATIC

### POWERS

STANDARD

### CRI

STANDARD

### COLOR TEMPERATURE

2700K | 3000K | 4000K

### ▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

### ▲ LIGHT DISTRIBUTION OPTIONS

DOWN

## LUMINAIRE INCLUDES

Recessed with frame mounting kit



### ON DEMAND

Special Color Temperature  
Number of switches  
Emergency Lighting\*  
Motion Detection  
Wireless Control Options (Casambi)

\* Accessories are delivered separately  
(not installed in luminaire).

## INSTALLATIONS



# OHIO

REF 10188.RF

.PN  
PENDANT

·10188 OHIO SLIM | PN  
Pag. 86

.SR  
SURFACE


·10188 OHIO SLIM | SR  
Pag. 86

.RF  
RECESSED FRAME

·10188 OHIO | RF  
Pag. 400

.TR  
TRIMLESS


·10188 OHIO | TR  
Pag. 588






OHIO	REF.	DIMENSION	FINISH	DIFFUSER	POWER	CRI	K	LUMEN	WATT	mA	DIMM	SKETCH
	10188	.35	●	.OP .MP	.ST	.9	.27	2706	27	700	.DA .PU .D1	
							.30	2940				
							.40	3000				
	10188	.45	●	.OP .MP	.ST	.9	.27	4510	45	700	.DA .PU .D1	
							.30	4900				
							.40	5000				
	10188	.65	●	.OP .MP	.ST	.9	.27	10824	109	700	.DA .PU .D1	
							.30	11760				
							.40	12000				
	10188	.95	●	.OP .MP	.ST	.9	.27	19844	200	700	.DA .PU .D1	
							.30	21560				
							.40	22000				
	10188	.125	●	.OP .MP	.ST	.9	.27	31570	318	700	.DA .PU .D1	
							.30	34300				
							.40	35000				

Reference order 10188.XX.RF.XX.XX.ST9.XX.XX

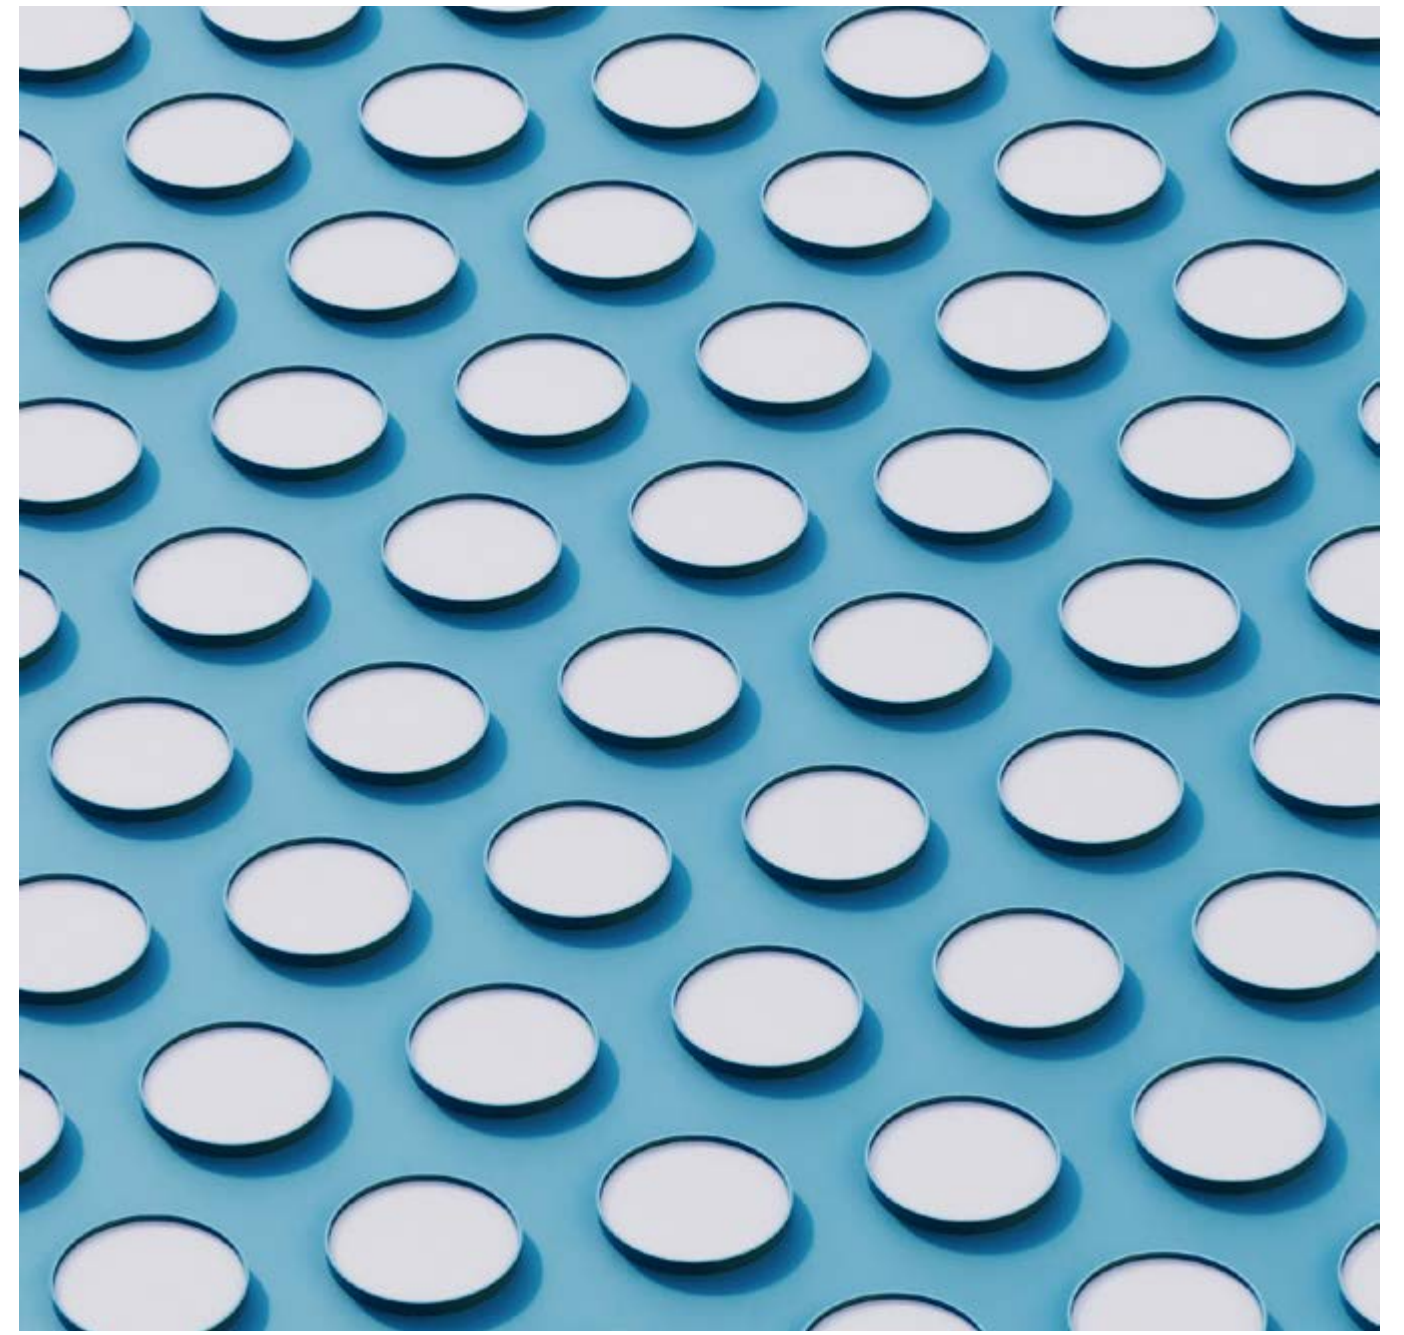

.RF  
RECESSED FRAME


• Select finishes

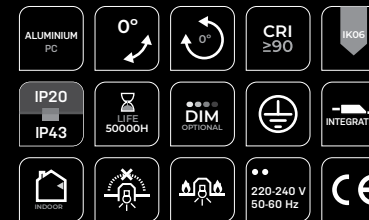


OHIO

REF 10188.RF


PHOTOMETRY

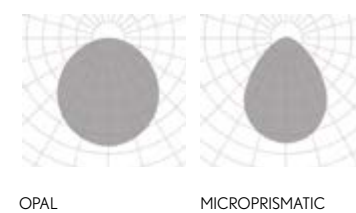

INCLUDED



PROFILE





## FINISHES

### ● COLORS



## DIMENSIONS

### ● DIAMETERS mm.

350 | 450 | 650 | 950 | 1250

## LIGHTING OPTIONS

### ■ DIFFUSERS

OPAL | MICROPRISMATIC

### POWERS

STANDARD

### CRI

90

### COLOR TEMPERATURE

2700K | 3000K | 4000K

### ▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

### ▲ LIGHT DISTRIBUTION OPTIONS

DOWN

## LUMINAIRE INCLUDES

Trimless mounting kit




### ON DEMAND

Special Color Temperature  
Number of switches  
Emergency Lighting\*  
Motion Detection  
Wireless Control Options (Casambi)

\* Delivered separately  
(not installed in luminaire).

## INSTALLATIONS

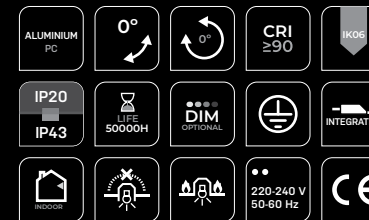

# OHIO

REF 10188.TR

**.PN**  
PENDANT

·10188 OHIO|PN  
Pag. 86

**.SR**  
SURFACE


·10188 OHIO|SR  
Pag. 86










**.RF**  
RECESSED FRAME

·10188 OHIO|RF  
Pag. 400

**.TR**  
TRIMLESS

·10188 OHIO|TR  
Pag. 588



OHIO	REF.	DIMENSION	FINISH	DIFFUSER	POWER	CRI	K	LUMEN	WATT	mA	DIMM	SKETCH
	10188	.35	●	.OP .MP	.ST	.9	.27	-	18	700	.DA .PU .D1	
							.30	2385				
							.40	2475				
	10188	.45	●	.OP .MP	.ST	.9	.27	4590	35	700	.DA .PU .D1	
							.30	4770				
							.40	4950				
	10188	.65	●	.OP .MP	.ST	.9	.27	9180	71	700	.DA .PU .D1	
							.30	9540				
							.40	9900				
	10188	.95	●	.OP .MP	.ST	.9	.27	16830	130	700	.DA .PU .D1	
							.30	17490				
							.40	18150				
	10188	.125	●	.OP .MP	.ST	.9	.27	27540	212	700	.DA .PU .D1	
							.30	28620				
							.40	29700				

Reference order | 10188.XX.TR.XX.XX.ST9.XX.XX




Select finishes



OHIO


REF 10188.TR

PHOTOMETRY

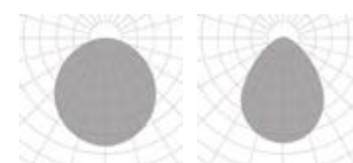


OPAL MICROPRISMATIC

INCLUDED



TR mounting KIT

PROFILE



TRIMLESS