



FINISHES

EXTERNAL COLOR



INTERNAL COLOR



DIMENSIONS

PROFILE LENGTHS mm.

800 | 1100 | 1400 | 1700 | 2000 | 2300

LIGHTING OPTIONS

DIFFUSERS

OPAL

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

DIMMABLE OPTIONS


DALI | 1.10 | PUSH

LIGHT DISTRIBUTION

UP-DOWN

LUMINAIRE INCLUDES

2 x Suspension cables 3m (each 2m)
NON-DIM DOWN or DIM DOWN: 1 x Feed Hose 3 x 0,75mm²
Diffuser

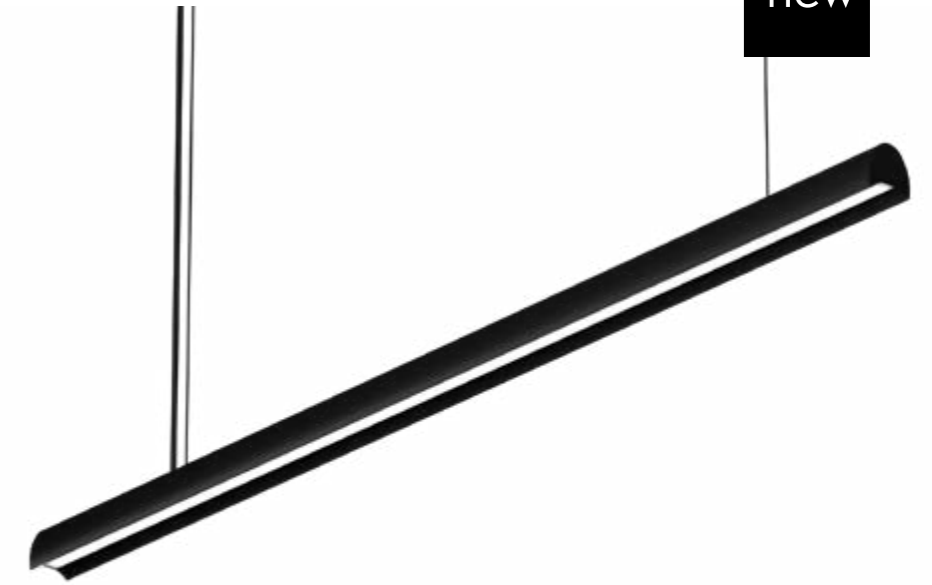

ON DEMAND
RGB
Tunable White



INSTALLATIONS




.PN
PENDANT

210017 OKKIA PLUS | PN
Pag. 206



OKKIA PLUS

REF 210017.PN

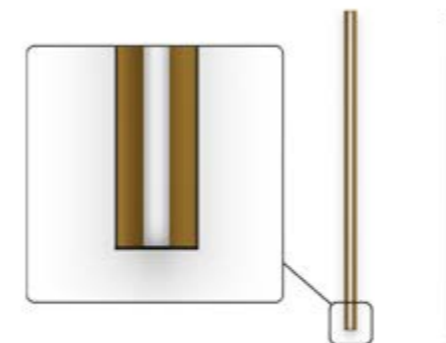

REF.	PROFILE LENGTH		FINISH	DIFFUSER	POWER	CRI	DOWNLIGHT*2 LUMEN			WATT	UPLIGHT ▲ UP*1 LUMEN			WATT	DIMM
	MM	MM					.27	.30	.40		K	.27	.30		
210017	.03	800	●	.OP	.ST	.9	3261	3377	3474	24	263	273	347	4	.DA .PU .D1
	.04	1100					3882	4020	4136	29	385	399	508	6	
	.05	1400					5435	5628	5790	40	526	545	693	8	
	.06	1700					6483	6713	6907	48	653	677	860	10	
	.07	2000					7609	7879	8107	56	790	818	1040	12	
	.08	2300					8657	8965	9223	64	917	959	1208	14	

Reference order | \uparrow \downarrow \bullet \blacksquare \blacktriangledown \blacktriangleup
 210017.XX | .SR | .PN | .XX.XX | .ST.9.XX.XX.XX

COMPONENTS

COVER KIT	REF.	FINISH
	TF12	●

Reference order | TF12.PN.XX

BOXES (.PN) Not-included, please select:

CONNECTION BOX	DRIVER BOX NON-DIMM	DRIVER BOX DIMMABLE	FINISH
			●
CB09.12	CB09.32	CB09.40	

Reference order | CBXXXX.XX

OPTIONS

SUSPENSION KIT	REF.	DIMENSION	FINISH
	SC05	5M.	.SA
	SC07	7M.	
	SC10	10M.	

Reference order | SCXX.SA

Total length = Profile length + 20mm + 2x2mm (Cover kit)


Select finishes



OKKIA PLUS

REF 210017.PN

PHOTOMETRY




OPAL

INCLUDED



SC03.SA
WIRE 3M.

PROFILE



45