



OKKO

Guaranteed success for your lighting projects.

The answer is always yes. There are no limits. Excellent, customisable designs that enhance any architectural and design project. A tasteful, versatile choice that never disappoints.

OK a todas tus propuestas de iluminación.

Ok a todo. Sin límites. Y con gran capacidad de personalización de los embellecedores, para integrarse en proyectos globales de arquitectura y decoración. Sin duda, una elección segura, versátil y que no defrauda.



new



FINISHES

● COLORS



DIMENSIONS

◆ DIAMETERS mm.

650 | 950 | 1250

LIGHTING OPTIONS

■ BEAM ANGLE

20° | 40° | 60°

POWER

STANDARD

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN


LUMINAIRE INCLUDES

.PN

3 x Suspension cables 3m
NON-DIM DOWN or DIM DOWN: 1 x Feed Hose 3 x 0,75mm²

.SR

Surface mounting kit

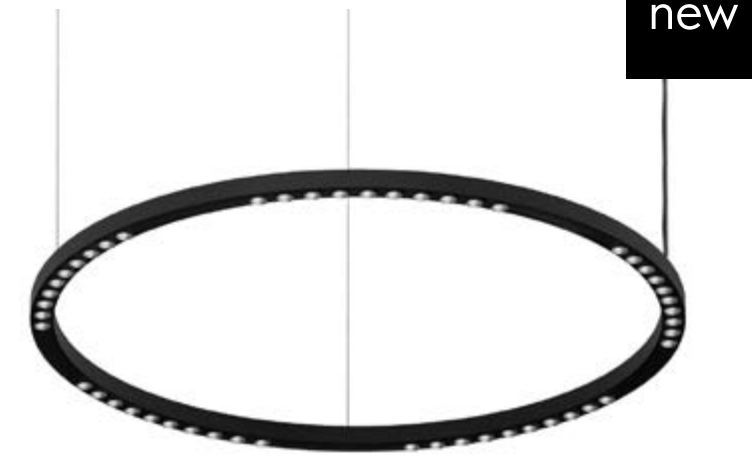

ON DEMAND

Emergency Lighting*
Motion Detection
Wireless Control Options (Casambi)



* Delivered separately
(not installed in luminaire).

INSTALLATIONS

.PN
PENDANT

10254 OKKO MODULAR | PN
Pag. 138


.SR
SURFACE

10254 OKKO MODULAR | SR
Pag. 138



OKKO MODULAR


REF 10254.PN | 10254.SR



PENDANT | SURFACE

OKKO	REF.	DIMENSION	FINISH	POSITIONS
	10254	.65	●	10
		.95		15
		.125		20

Configure your OKKO combining LED modules and OPAQUE as you wish.
Configura tu OKKO combinando los módulos LED y OPAQUES que desees.

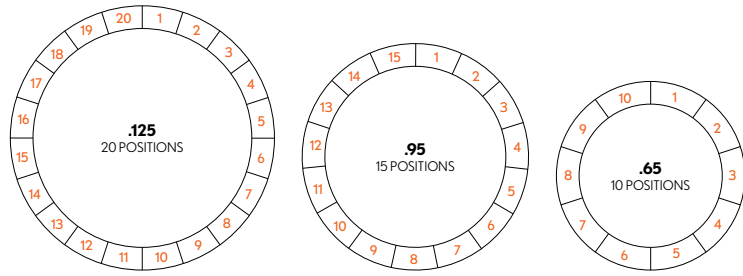

Reference order | 10254.XX | .SR | .PN | .XX

OKKO LED MODULES	REF.	DIMENSION	FINISH	OPTIC OPTIONS	POWER	CRI	.27	LUMEN	.30	.40	WATT	mA	SKETCH
	110003	.65	●	.20 .40 .60	.ST	.9	.27	541	586	671	7	500	
		.95						541	586	671	7	500	
		.125						541	586	671	7	500	

Reference order | 110003.XX.XX.XX.ST9.XX

OKKO OPAQUE	REF.	DIMENSION	FINISH
	ACC10254	.65	●
		.95	
		.125	

Reference order | ACC10254.XX.XX

OKKO DRIVER	DIMENSION *	DIMM
DR10254	.01 1 - 4 modules	.DA .PU .D1
	.02 5 - 10 modules	
	.03 11 - 13 modules	
	.04 14 - 17 modules	
	.05 18 - 20 modules	

Reference order | DR10254.XX.XX

CABLE CONCENTRATOR	CONNECTION BOX	REF.	FOR MODEL	FINISH
		CB02	.65	●
		CB05	.95 .125	

Reference order | CBXX.XX

CABLE CONCENTRATOR KIT	CONNECTION BOX	REF.	FOR MODEL	FINISH
		SC22	.65	●
		SC23	.95 .125	

Reference order | SC20.XX

Not-included, please select:

CONNECTION BOX AND DRIVER BOX FOR REMOTE DRIVER	DRIVER BOX NON-DIMM	DRIVER BOX DIMMABLE	FINISH
			●
CB03	CB04.OP *	CB12	


*No finish color, use this reference as it is (CB04.OP).
Sin acabado de color, la referencia es tal cual (CB04.OP)

Reference order | CBXXXX.XX

SUSPENSION KIT	REF.	DIMENSION	FINISH
	SC05	5M.	.SA
	SC07	7M.	
	SC10	10M.	

Reference order | SCXX.SA

REFERENCE ORDER EXAMPLE EJEMPLO DE REFERENCIA



Create an OKKO like the one in the example. Crea un OKKO como el del ejemplo:

- Select PROFILE. *Selecciona PERFIL.* 10254.95.PN.XX
- Select LED MODULE and quantity. *Selecciona el módulo LED y la cantidad.* 110003.95.XX.XX.ST9.XX (9 Qty./Uds.)
- Add LED MODULES' position. *Añade la posición de los módulos LED.* 1, 2, 3, 6, 7, 8, 11, 12, 13
- Add number of OPAQUE diffusers. *Añade el número de difusores OPAQUE.* ACC10254.95.XX (6 Qty./Uds.)
- Verify DRIVER depending on the number of LED modules. *Verifica el DRIVER dependiendo del número de módulos LED.* DR10254.02.XX

Select finishes




OKKO MODULAR


REF 10254.PN | 10254.SR

Let's create


Give full rein to your imagination.
Configure your Okko Modular to suit best your project needs
*¡Da rienda suelta a tu imaginación!
Configura tu Okko Modular según las necesidades de tu proyecto*

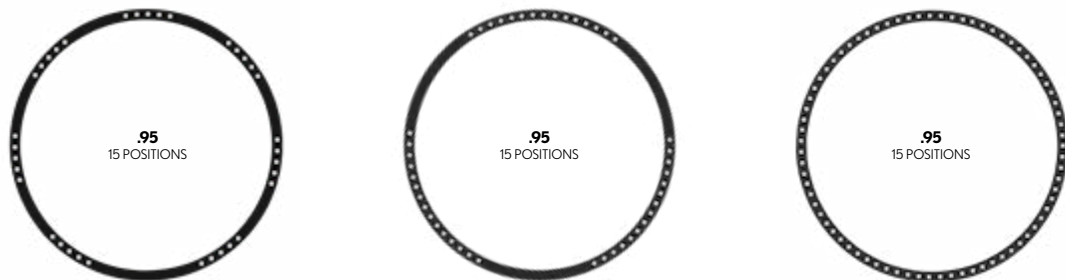


PHOTOMETRY

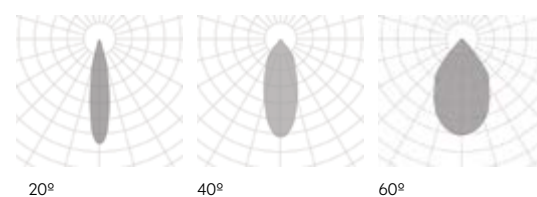

INCLUDED (.PN)



PROFILE



PENDANT | SURFACE

.SR
.PN

PENDANT | SURFACE