

FINISHES

● COLORS



DIMENSIONS

● LENGTHS

.01

LIGHTING OPTIONS

■ DIFFUSERS

OPAL

POWER

STANDARD | HIGH

CRI

90

COLOR TEMPERATURE

2700K | 3000K | 4000K

▼ DIMMABLE OPTIONS

DALI | 1.10 | PUSH

▲ LIGHT DISTRIBUTION

DOWN


LUMINAIRE INCLUDES

.PN

4 x Suspension cables 3m
NON-DIM DOWN: 1 x Feed Hose 3 x 0,75mm²
DIM DOWN : 1 x Feed Hose 5 x 0,75mm²
Diffuser

.SR

Surface mounting kit

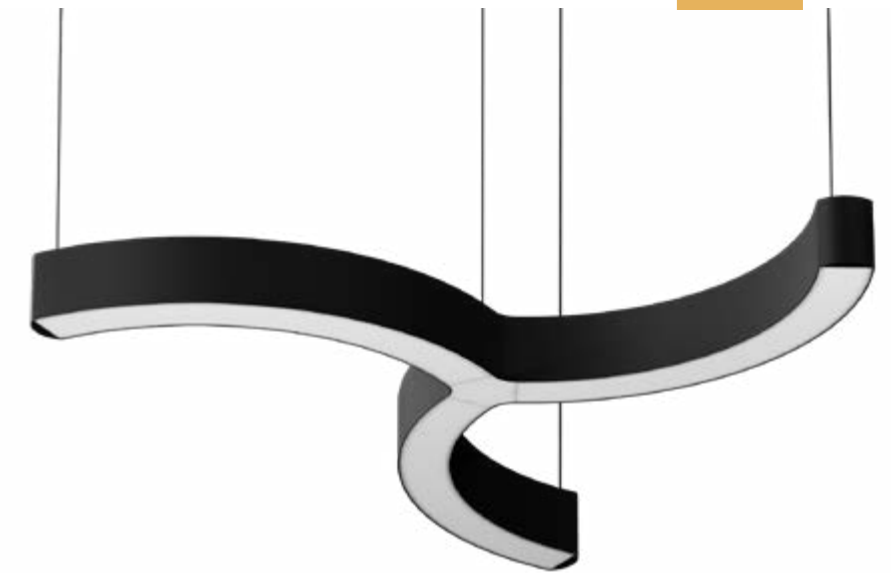

ON DEMAND
Emergency Lighting *
Motion Detection
Wireless Control Options (Casambi)

* Delivered separately
(not installed in luminaire).

INSTALLATIONS



TRIBOLD


REF 210018.PN | 210018.SR

.PN
PENDANT



·210018 TRIBOLD | PN
Pag. 258

.SR
SURFACE

·210018 TRIBOLD | SR
Pag. 258



PENDANT | SURFACE
SR
PN

TRIBOLD	REF.	DIMENSION ♦	FINISH ●	DIFFUSER ■	POWER	CRI	DOWNLIGHT *1 LUMEN			WATT K	DIMM ▼	SKETCH
							.27	.30	.40			
	210018	.01	●	.OP	.ST	.9	4781	4969	5156	37	.DA .PU .D1	 Ø1143 85
					.HI		9563	9931	10325	74		

Reference order | 210018.XX | .SR | .PN | .XX.OP.XX.9.XX.XX

COMPONENTS

COVERT KIT	REF.	FINISH
	TF17	●

Reference order | TF17 | .SR | .PN | .XX



PENDANT | SURFACE

• Select lens finishes




- ALUMINUM PC
- 0°
- 0°
- CRI ≥90
- IK05
- IP40
- LIFE 50000H
- DIM OPTIONAL
- INTEGRATED
- INDOOR
- 220-240 V 50-60 Hz
- CE

TRIBOLD


REF 210018.PN | 210018.SR

PHOTOMETRY




OPAL

INCLUDED (.PN)



SC03.SA
WIRE 3M.

PROFILE



65

*1Down light (direct light) works at 500mA. La luz directa trabaja a 500mA.